



Premium connections

TMKUP.COM

TMK UP SERIES



Premium Connections

TMK UP Series

Technical Guidebook

INTRODUCTION

TMK UP Premium connections have been developed by TMK specialists. These connections are used in pressure-tight casing and tubing string assemblies intended for various purposes. TMK UP Premium connections can be used in vertical, controlled directional and horizontal wells of oil, gas and gas condensate fields in complex operation conditions (aggressive media containing H₂S and CO₂, low and high temperatures). These are high-tech threaded connections resistant to high tensile, compressive and bending loads, and excessive torque.

The TMK UP threaded connections are manufactured at TMK branches and also under license at other manufacturers' facilities.

These threaded connections have stringent manufacturing tolerances. They are machined on specialized high-precision equipment and undergo a thorough control procedure at the manufacturer's premises.

Improper make-up and operation can reduce the specified characteristics of threaded connections, result in their damage and, as a consequence, loss of string integrity. It is important to comply with the recommendations given below, which are based on years of experience of TMK specialists in string runs of various complexity.

Implementation of recommendations will also help to reduce string running time.

We are ready to consider your requests, if you need to modify existing connection designs or develop fundamentally new designs for your specific tasks or conditions.

This guidebook includes the latest data. The company's products are regularly improved, to get the most up-to-date information, please, contact us at: techsales@tmk-group.com or check our website: www.tmkup.com

CONTENTS

PREMIUM CONNECTIONS PRODUCT LINES

TMK UP SERIES

Pipes with standard properties	7	Pipes with special properties	8
--------------------------------	---	-------------------------------	---

GUIDELINES FOR MAINTENANCE AND OPERATION OF PIPES

Transportation, handling operations and storage	13	String assembly	23
Materials and equipment for pipe running	14	Makeup torque	26
Work schedule	14	Makeup diagram for correct making-up	27
External examination	14	Makeup diagram for incorrect making-up	28
Drifting	14	Making-up with different wall thickness and/or of different strength groups	32
Make-up Loss	15		
Removal of Thread Protectors	16	Threaded connections "Premium" TMK UP Series	33
Thread Compound Removal	16		
Inspection of threaded connection surface	17	Pipe diameter range, manufactured with threaded connections of "Premium" class. TMK UP Series	34
Possible damage of threaded connection surface and repair	18	Special couplings	35
Installation of thread protectors	20	Guidelines for selection of steel grades for special couplings	36
Thread Compound Application	20	Coupling with special bevel	38

CONTENTS

GREENWELL

GreenWell solid plating	39	GreenWell Crystal thread compound	40
-------------------------	----	-----------------------------------	----

TORQUE SERIES

Threaded connection TMK UP MOMENTUM	43	Threaded connection TMK UP MOMENTUM SFL	57
Threaded connection TMK UP MOMENTUM GT	49	Threaded connection TMK UP MOMENTUM FL	61

PRO SERIES

Threaded connection TMK UP PF	69	Threaded connection TMK UP CENTUM ET	111
Threaded connection TMK UP PF ET	83	Threaded connection TMK UP CENTUM ET CHS	119
Threaded connection TMK UP CENTUM	95		

CLASSIC SERIES

Резьбовое соединение TMK UP FMC	127		
---------------------------------	-----	--	--

LITE SERIES

Threaded connection TMK UP SIMPLEX	139	Threaded connection TMK UP CWB II	159
Threaded connection TMK UP CWB	149	Threaded connection TMK UP MAGNA	169

TMK UP SERIES

Premium Connections Product Lines

Pipes with standard properties

Pipes with Premium connections of TMK UP Series enterprises belonging to TMK Group as well as Service License.

Pipes with standard properties are supplied according to API* Spec 5CT or GOST 31446 standards, or similar technical specifications and TMK (STO TMK) standards.

Pipes with specific properties are supplied in compliance with TMK-Premium Service standards (STO TMK-PS).

Strength groups according to API* Spec 5CT and GOST 31446

Minimum yield point	MPa	276	380	449	552	621	656	759	863	932
	ksi	40	55	65	80	90	95	110	125	135
Class 1	H40	J55 K55*		N80 1 type N80 Q type			R95			
Class 2			M65	L80 1 L80 type 9Cr L80 type 13Cr type	C90 1 type	T95 1 type	C110			
Class 3							P110			
Class 4									Q125 1 type	Q135*
* According to GOST 31446, this strength group includes not only casing, but also tubing.										

Pipes with special properties

Pipes with special properties

TMK Group developed a wide range of tubing and casing pipes with special properties of use in the most extreme conditions: low temperatures, high corrosivity and high collapse pressures.

Low temperature (LT)

Are designed to be used in the production fields of Siberia and the Far North. The metal of these pipes has high ductility and impact toughness at minus temperatures.

To define cold resistance, the pipe metal is tested for impact bending according to the Sharpie method at a temperature of -60°C with quality control of a ductile constituent in the bent fracture of the test sample.

Additionally there is a special delineation of strength groups of low temperature pipes – “LT”.

Sour service (S, SS)

Are designed to be used in extraction fields which contain sulphurated hydrogen in their extracted products. The metal of the pipes has sulfide stress cracking resistance, which is defined during tests according to the NACE TM0177 standard. The coefficient of threshold voltage during the test of pipes metal is chosen according to the partial pressure of sulphurated hydrogen.

Depending on the partial pressure of sulphurated hydrogen, pipes can be produced with two levels of resistance:

- for mid-sulphurous fields with a partial pressure of sulphurated hydrogen from 0.01 MPa to 1.50 MPa. Additional labelling of strength groups – S;
- for high-sulphur fields with a partial pressure of sulphurated hydrogen more than 1.50 MPa. Additional labelling of strength groups – SS.

Corrosion resistant alloys (13Cr, 13CrS)

These are designed to be used in extraction fields which contain carbon dioxide in their extracted products. The metal of these pipes has carbon dioxide corrosion resistance. The content of chrome in the steel is 13%, which provides for corrosion resistance in these pipes. Depending on field conditions: pressure, temperature, partial pressure of CO₂ and H₂S, these pipes can be produced with two levels of resistance:

- for standard pressures, temperatures and environment, containing CO₂;
- for high pressures, temperatures and environment, containing CO₂, and also small quantities of H₂S.

High collapse (HC)

These pipes are designed to be used at high external pressures in oil- and gas-wells. Withstand higher external collapse pressures well over calculated according to requirements of the ISO 10400 standard. Sections of pipes are tested for external collapse pressure to confirm to these properties.

Additional labelling of strength groups of pipes with high collapse resistance – HC.

Deep and super-deep wells (DW)

These are designed to be used at deep and super-deep wells at high pressures. Pipes have a minimum yield strength of metal, exceeding 966 mPa. Additional labelling of strength groups of pipes for deep and super-deep wells – DW.

Strength groups of pipes with special properties

Minimum yield strength	MPa	379	552	621	655	758	862	930	965	1035	TMK 150LT
	ksi	55	80	90	95	110	125	135	140	150	
Low temperature		TMK 55LT	TMK 80LT	TMK 90LT	TMK 95LT	TMK 110LT	TMK 125LT	TMK 135LT	TMK 140LT		TMK 150LT
H ₂ S resistant pipes			TMK 80S	TMK 90S	TMK 95S	TMK 110S TMK 110SS					
CO ₂ resistant pipes			TMK 80 13Cr		TMK 95 13Cr TMK 95 13CrS	TMK 110 13CrS	TMK 125 13Cr	TMK 135 13Cr			
Pipes with a high resistance to collapse			TMK 80HC	TMK 90HC	TMK 95HC	TMK 110HC	TMK 125HC	TMK 135HC	TMK 140HC		TMK 150DW
Pipes for deep and super-deep wells									TMK 140DW		

Guidelines for maintenance and operation of pipes

Guidelines on pipes operation and maintenance in field conditions include guidelines on string landing and lifting, pipe preparation for making-up and assembly, pipe control during operation, as well as transportation, handling and storage instructions.

Transportation, handling operations and storage

- All pipe handling operations shall be performed with thread protectors installed at the pin and box ends.
- It is forbidden to drop the pipes at a height, to skid the pipes or to carry out any operations leading to thread damaging or dents formation on the pipes.
- For corrosion-proof pipes it is required to use special handling equipment and methods to ensure the pipe does not collide with each other or any other objects. Mutual pipe collision and collision with other objects may result in significant local pipe surface hardness increase and may have impact on the pipe resistance to sulphide pressure cracking.
- If pipes are unloaded by hands, use forged loops, roll the pipes down using guide pieces in parallel to the pile, avoiding fast movement and mutual collision of the pipes ends, which may result in damaging the pipe and coupling threads, even if thread protectors are provided.
- When handling long pipes using a lifting crane, use spreader bars with ropes according to approved point of lift.
- A special area shall be arranged at the drilling site for pipe stacking. It is absolutely forbidden to stack and unload the pipes directly onto the ground.
- Pipes shall be put onto racks with the following conditions observed:
 - racks shall be free from stones, sand or dirt;
 - supports shall be installed in such manner that the lowest pipe row shall be not below 350 mm from the ground level;
 - pipe rack supports shall be installed on the same level and shall be supported by the posts capable to withstand a full pipe stack load;
 - it is recommended to install anti-rolling devices on the racks.
- Sufficient number of racks shall be installed for stacking the entire casing string.
- When stacking pipes on the rack, the following shall be considered:
 - position pipes in such manner, that the box end was directed towards the well head;
 - stack pipes on the supports in such way to avoid pipe flexure or thread damage;
 - install wooden blocks between pipes runs. Position blocks perpendicular to the pipes, directly above the blocks of the previous run and the supports in order to avoid pipe flexure;
 - install at least three wooden blocks between the adjacent pipe runs to avoid pipe flexure. Block thickness must be sufficient to exclude coupling contact and coupling thread damage;
 - stack not more than 6 runs of pipes on the racks.
- In the process of stacking consider the sequence of pipe running into the well in such manner, that the first pipe according to the work schedule is above the pipes, which shall be run down later. Pipes numeration shall begin from the first run.

Materials and equipment for pipe running

In order to avoid thread damaging or dents formation on the pipes during pipe running down use dedicated materials and equipment, including:

- thread protectors
- bell guide
- chain slider
- lifting cap or chain slider (for streamlined joints)
- hydraulic tongs for making up joints with automated torque control system
- thread compound.

Work schedule

All works on the string assembly shall be performed according to the approved work schedule, prepared in compliance with the working design and the requirements of “Guidelines for use of corresponding casing or tubing connections”.

The works schedule shall contain information regarding the sequence of pipe and equipment running to the well, making-up torques, landing depth, the type of thread compound. Assembling of a string shall be carried out under the supervision of the officer, responsible for the works, who is specified in the work schedule. The content of the schedule must be communicated to all interested parties, including subcontractors.

External examination

Before lifting pipes to the drilling platform, visually inspect the pipes, couplings, screw-plug fuses for the absence of mechanical damage (bottomholes, dents, etc.), occurred during transportation and stacking.

Drifting

Drifting must be performed along the full length of the pipes in form of steel plug. For drifting pipes of chrome and corrosion-proof steels use polymer or aluminum plugs and nonmetal rope. Pipe position during drifting process must exclude the pipe flexure. Cords and rods, used for drifting (if any), must be clean. Heat pipes with steam before gaging, if the temperature is below zero.

Dimensions of the operating part of the plug shall be determined by the internal diameter of the pipes.

Sizes of the working part of the draft for the wiper drifting

Outside pipe diameter		Drift size, not less than	
in	mm	Length, mm	Dimeter, mm
up to 2 7/8	up to 73 (73,02)* inclusive	1067	inside pipe diameter – 2,38
more than 2 7/8	more than 73 (73,02)*	1067	inside pipe diameter – 3,18
up to 9 5/8	up to 244,48	152	inside pipe diameter – 3,18
from 9 5/8 up to 13 3/8	from 244,48 up to 339,72 inclusive	305	inside pipe diameter – 3,97
more than 13 3/8	more than 339,72	305	inside pipe diameter – 4,76
* If pipes are delivered by nominal outer diameter with accuracy to two decimal digits.			

It is recommended to check the diameter of the drift mandrel in three planes across the length every 50 pipes. If the plug diameter reduction exceeds 0.5 mm in any plane, such plug shall be rejected.

The drift must freely pass through the entire pipe, when moving it by hands without applying excessive force.

If the plug may not pass through the pipe, it shall be replaced with a new pipe, and the pipes shall be renumbered.

Make-up Loss

When determining the quantity of joints, required for the string running to the calculated depth, it is recommended to consider the pipe length reduction during making-up. For this purpose, the length of each pipe shall be measured from the free (without thread protector) edge of the coupling to free (without thread protector) edge of the pin pipe end and deduct the make-up loss, and then mark the measured length using a marker or piece of chalk on the pipecase.

Removal of Thread Protectors

To protect thread from damage during transportation and stacking, storage compound, applied on the thread, and thread protectors, shall be used.

If the pipes delivered to the drilling site are fitted with threaded protectors applied with thread-sealing compound, the threaded protectors may be left in place and the compound need not be replaced, provided that the string is made up no later than 6 months from the pipe manufacturing date and there is no visible damage to the protectors.

If the pipes delivered to the drilling site are fitted with threaded protectors applied with preservative compound, or if the string is made up more than 6 months from the pipe manufacturing date, the compound shall be replaced, except when using a long-storage compound.

Thread protectors shall be removed using a special wrench by one person. If any troubles occur during the thread protector removal, it is allowed to strike slightly onto the thread protector edge using a wooden object to eliminate possible misalignment.

Thread Compound Removal

After thread protector removal, thread compound shall be removed from pipe and coupling threaded connections. For this purpose it is recommended to use hot soap water under pressure or steam cleaner, which provides easy and safe compound removal. At temperatures below zero it is allowed to remove compound using a chlorine-free solvent with following threaded connection blow-down with compressed air.

It is forbidden to use diesel fuel, kerosene, brine water, barite and metallic brush for compound removal!

Use of diesel fuel and kerosene lead to formation of a film on the connection surface, thus impeding the compound application and reducing its adhesion with metal. Use of metal brush or barite leads to cracks formation on the sealing surfaces of the threaded connection, and may result in loss of the connection leak tightness.

After thread compound removal threaded connections shall be wiped with a clean and dry cloth or dry by blowing-down using compressed air.

Inspection of threaded connection surface

Directly before the string running into the well inspect the thread from the box and pin side to avoid assembling threaded connections with mechanical defects.

Threaded connections shall be inspected by specialists:

- string assembling team,
- pipe inspection companies.

When inspecting threaded connections of pipes and couplings (including thread, sealing and support element surfaces) the following aspects shall be considered:

- damage in the result of any external shock impacts;
- traces of rust, corrosion or other chemical damage in the result of environmental impacts or aggressive substances.

Determination of corrosion depth, barbs, scabs, scratches shall be performed as follows:


- visually.

If any damage is detected, condition the surface (or polish it) according to the operation manual.


Possible damage of threaded connection surface and repair

Surface area	Type of damage	Way to repair
1, 2	Surface corrosion (rust), pitting corrosion with a depth of no more than 0.1 mm	Manual repair (removal) using a non-metallic brush with soft bristles or a sanding cloth with grit "0"
	Pitting corrosion with a depth of more than 0.1 mm	Cannot be repaired
	Dents, nicks, scratches, and other defects with a depth of no more than 0.1 mm	Manual repair using a file or a sanding cloth with grit "0"
	Dents, nicks, scratches, and other defects with a depth of more than 0.1 mm	Cannot be repaired
3	Surface corrosion (rust), pitting corrosion with a depth of no more than 0.3 mm	Manual repair using a file or a sanding cloth with grit "0"
	Pitting corrosion with a depth of more than 0.3 mm	Cannot be repaired
	Dents, nicks, scratches, and other defects with a depth of no more than 0.1 mm	Manual repair using a file or a sanding cloth with grit "0"
	Dents, nicks, scratches, and other defects with a depth of more than 0.1 mm	Cannot be repaired
4	Pitting corrosion of any depth	Cannot be repaired
	Surface corrosion (rust) removed by polishing with a felt wheel	Repair by polishing with a felt wheel
	Scratches removed by polishing with a felt wheel	Repair by polishing with a felt wheel
	Dents, nicks, scratches, and other defects of any depth	Cannot be repaired

Pipe and coupling threaded connection surface areas

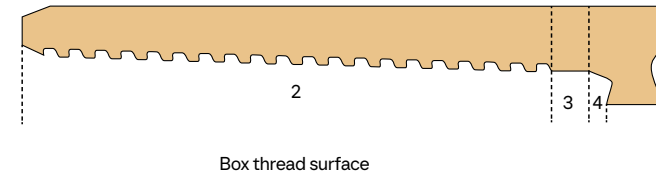

Box thread surface



Pin thread surface

1 – thread runout; 2 – thread; 3 – cylindrical groove; 4 – sealing elements

Installation of thread protectors

Pipes shall be lifted to the drilling platform for the string assembling only provided that special thread protectors are installed (regular or Klepo-type).

Previously removed thread protectors may be installed again, provided that before installation they are carefully cleaned from earlier applied thread compound and inspected for any damage. Thread compound shall be removed in compliance with the requirements on pipe and coupling threaded connections cleaning. Thread protectors with significant thread damage and distortions must not be re-used.

Thread Compound Application

To ensure optimum making-up conditions and to avoid galling of the mating surfaces, it is necessary to apply thread compound to the thread, sealing and shoulder area of pins and boxes. Thread compound shall comply with the requirements of API* RP 5A3/ISO 13678.

Use of the following thread compounds is recommended:

- “RUSMA – 1” and its modifications;
- “RUSMA P-4” and its modifications;
- “RUSMA P-14” and its modifications;
- “PYCMA API Modified”
- “Bestolife API Modified”
- “Bestolife 2000 NM”
- “Bestolife 2000”
- “Bestolife 72733”
- “JET-LUBE API Modified”
- thread coating “GreenWell Crystal”.

Before applying a thread compound check the expiration date, specified on the container. Expired thread compound must not be used.

The following guidelines shall be observed when using a thread compound:

- for assembling a string only one type of compound shall be used;
- use new compound container for each running;
- use compound without foreign inclusions;
- carefully stir the compound before using it;
- heat the compound before applying it, if the temperature is low zero;
- compound shall be stored in closed container;
- compound shall be stored at the temperature, specified by the compound manufacturer;
- specify the date of the first use on the container with remaining compound, when putting it to storage;
- the use of compound from containers without identification markings, transferring compound into other containers and diluting compound.


Thread compound shall be applied on the entire thread surface, as well as on the surface of sealing and shoulder elements of pin and box connections.

Carefully dry and clean the threaded connection surface before applying thread compound.


Check the threaded connection for any damage before applying the compound.

Thread compound shall be evenly applied on the entire thread surface, as well as on the surface of sealing and stop elements of pipe and coupling connections.

Correct and Incorrect application of the thread compound

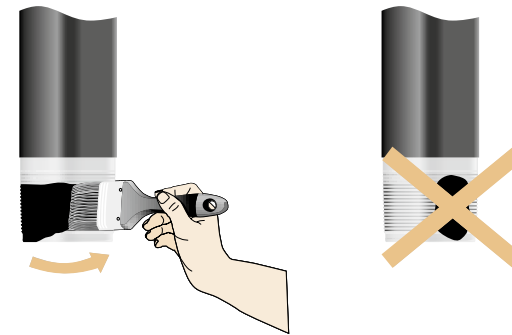

Correct distribution of the thread compound across the thread profile




It is recommended to apply compound using flat nylon brushes, and a textured brush – for applying grease on the box end.

It is forbidden to use metal brushes for applying compound!


- Before running the pipes into the well make sure that the amount of the thread compound available is sufficient.
- If a friction coefficient, specified on the thread compound container, is different from 1.0, contact technical specialist of TMK to determine the corrected makeup torque at techsales@tmk-group.com.
- Before makeup make sure that the thread, sealing and shoulder surfaces of the connection with applied thread compound are free from drilling fluid, containing small particles, which may deteriorate the connection leak resistance. In case of drilling or sludge liquid contact with the connection surface, remove such liquid and apply the thread compound again to the connection in order to determine the corrected makeup torque.
- When making-up pipes with crossover subs or other string elements, a thread sealant may be used, provided that the following conditions are met:
 - if the engagement torque of the shoulder elements is 25% of the optimal makeup torque and the final makeup torque exceeds the engagement torque by 20%;
 - if the shoulder torque of the connection exceeds 80% of the optimum makeup torque, and it is not the result of the thread jamming or damaging, and 20% of the optimum makeup torque is applied after the connection thrust elements shouldering.
- When using a thread sealant, it is recommended to apply small amount of thread compound to the sealing and thrust elements of the threaded connection and to the first two thread strings of the pipe and the coupling.


String assembly

- Pipe string shall be assembled only by a qualified operator.
- Check alignment of the pipe axis and the well axis before string assembling.

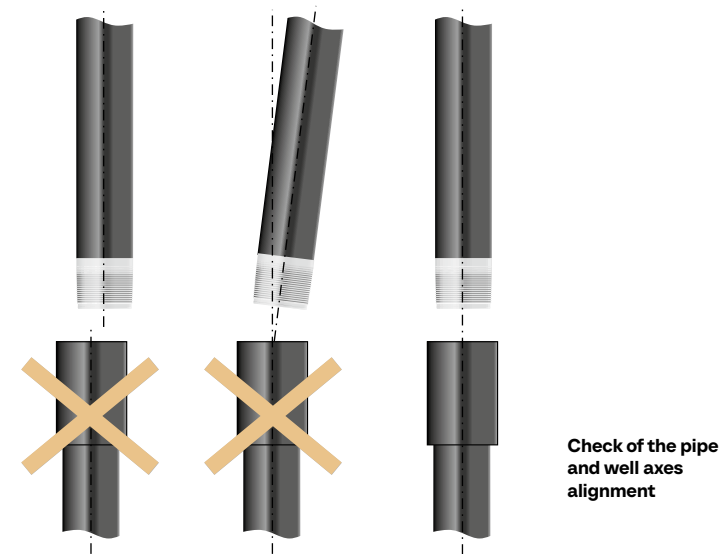

- Before makeup, check by-touch the absence of mechanical damage of sealing and thrust surfaces at the free end of the pipe.

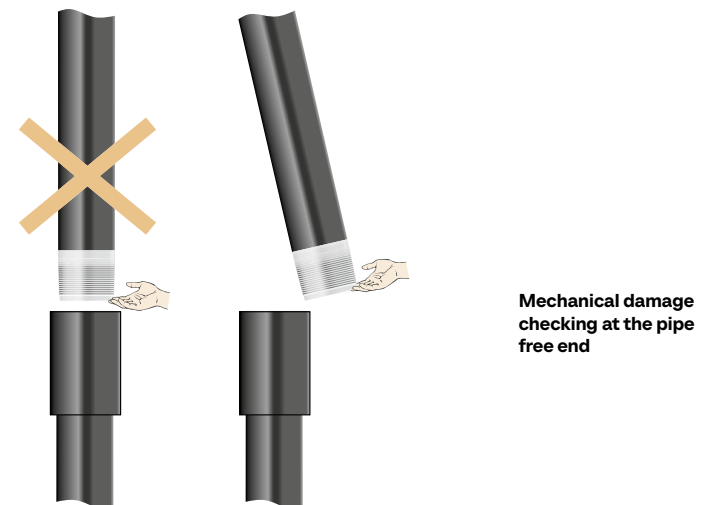

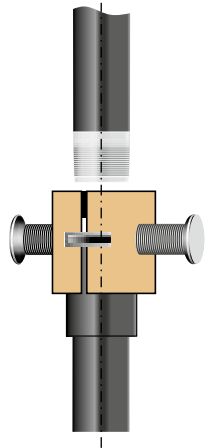


Stabbing with use of bell guide

- When implanting the pipe into its coupling, it is not allowed to hit the pipe end on the coupling face or “sliding” of the pipe end into the coupling when the pipe end touches the coupling face.

It is recommended to use a re-entry guide. When lowering the pin into the coupling, this provides alignment and prevents damage to the joints.


- To ensure proper thread profile engagement between the pin and box threads, the first two turns during makeup must be performed manually or using a specialized strap wrench or chain wrench, depending on the pipe weight. This is to confirm that the pin thread correctly engages with the box thread, i.e., that the pin thread profile properly enters the corresponding profile in the box. The use of strap wrenches is recommended. The use of chain wrenches is permitted provided a protective insert is used to prevent damage to the pipe body.

At this stage it is allowed to have a half-turnback rotation of the pipe to securely continuemaking-up without overlapping the joint threads and to achieve high-quality assembly.



Making first two turns of assembly with special wrench with belt

- Power tongs shall have a rotation speed regulator and provide the speed of 2-5 rpm at the final stage of makeup.
- The tongs shall have clamps for specific pipe size to ensure the largest possible contact area with the pipe case. Clamp size shall be 1% greater than the nominal outer diameter of the pipe. Clamps shall be adjusted in such manner, that they could reliably hold the pipe and do not slide off during operation. During makeup ensure the possibility of gradual tongs lowering (for example, by means of compensator).

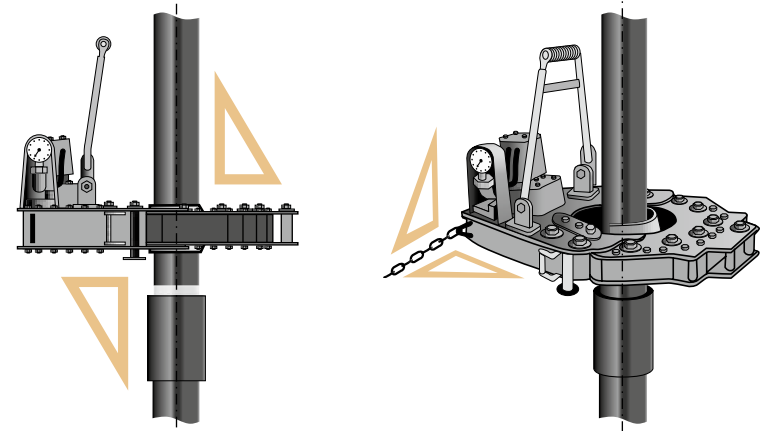

Installation of the power tongs before makeup

- The makeup equipment shall provide the torque at least 30% greater than the recommended maximum makeup torque to avoid shocks during the threaded connection making up.
- To unscrew the threaded connection, a greater torque is required in comparison with the makeup torque (breakaway torque), which may be higher than the optimum torque by 15%.

Making-up shall be smooth and without significant (not exceeding 50°C) connection heating. Recommended speed after making-up of the first two turns is 10 rpm, and the recommended makeup speed during the torquing is 2 rpm.

Makeup and breakout speeds of the threaded connections using a power tings

Making-up			Breaking-out		
Makeup start		Makeup end (torqueing)	Breakout start		Breakout end
First two turns	Next turns		First two turns	Next turns	
Low speed, better by hands	High speed, not exceeding 10 rpm	Low speed, 2-5 rpm	Low speed, 2-5 rpm	High speed	Low speed, better by hands

There shall be no significant (exceeding 5% of the wall thickness) mechanical damage (tearing, scuffing, etc.) from the hydraulic wrench inserts on the pipe and the coupling case after the making-up.

Makeup torque


Optimum makeup torques of the threaded connections are given in the tables. Maximum and minimum makeup moments differ from the optimum one by 10% (\pm). The connection making-up control shall be carried out according to the makeup diagram.

Makeup diagram for correct making-up

When the makeup is correct, the torque increase on the makeup diagram during the first turns shall be slow and even. Then, when the thread is matched with excessive tightening, the torque growth acceleration shall take place until the coupling of the sealing and thrust elements of the connection, which is accompanied by the sharp increase of the torque, indicating that the makeup is correct. Final makeup torque of the connection shall be between the minimum and the maximum makeup moment.

Shoulder torque T_{sh} of the connection thrust surfaces (coupling thrust seat and the pipe thrust end) shall be within the range between 5% and 80% of the optimum makeup torque (recommended to the corrected makeup torque).

In case of the correct diagram form it shall be considered that the component of the radial sealing of the connection makeup torque is significantly less compared to the thread component, that is why it is not always distinctive on the diagram.

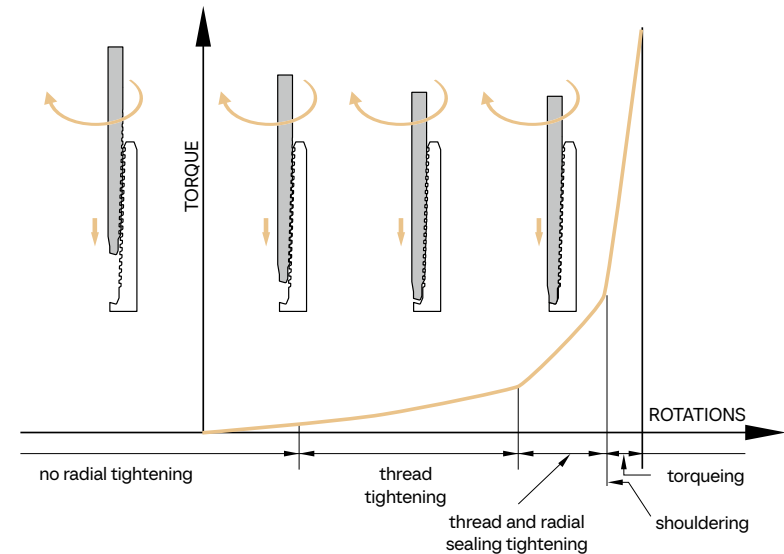


Threaded connection makeup diagram in case of correct making-up

Makeup diagram for incorrect making-up


If there is an area, corresponding to possible plastic distortion of the torque shoulder, on the makeup diagram, disassemble the connection and check the pipe and the coupling ends. If upon the results of the inspection and by-hand and drift tests on the thrust and mating surfaces of the connection no traces of plastic distortion (form change) are detected, the repeated making-up of such connection may be performed.

Evidences of the distortion include tearing and other damage of thread, shoulder and sealing surfaces, as well as deformation of the internal coupling bore.

If a minor torque gain (0.02 rotations) is observed on the make up diagram from the radial sealing (see the diagram on page 29), this relates to small sea ling area and matching of high thread tightening and low sealing tightening. Such type of connection is acceptable. However, in case of doubt regarding the connection assembly, perform control making-up/ breaking-out of the connection.

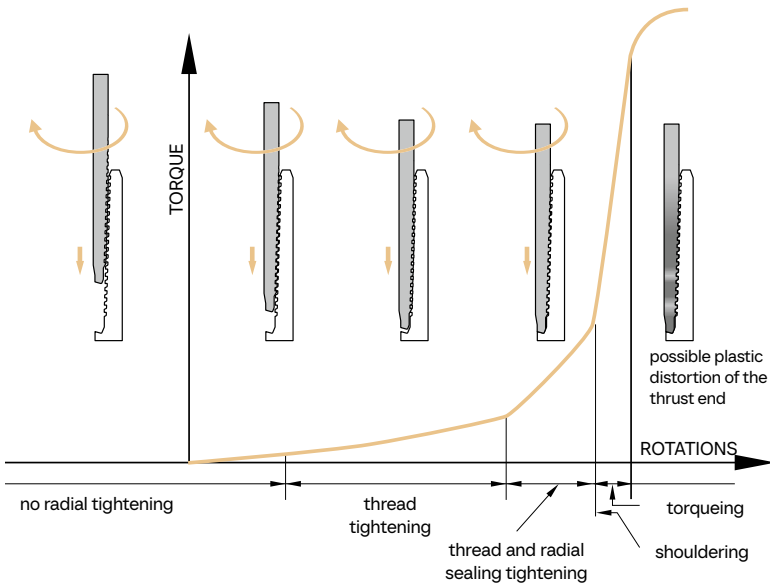

Threaded connection makeup diagram in case of incorrect making-up

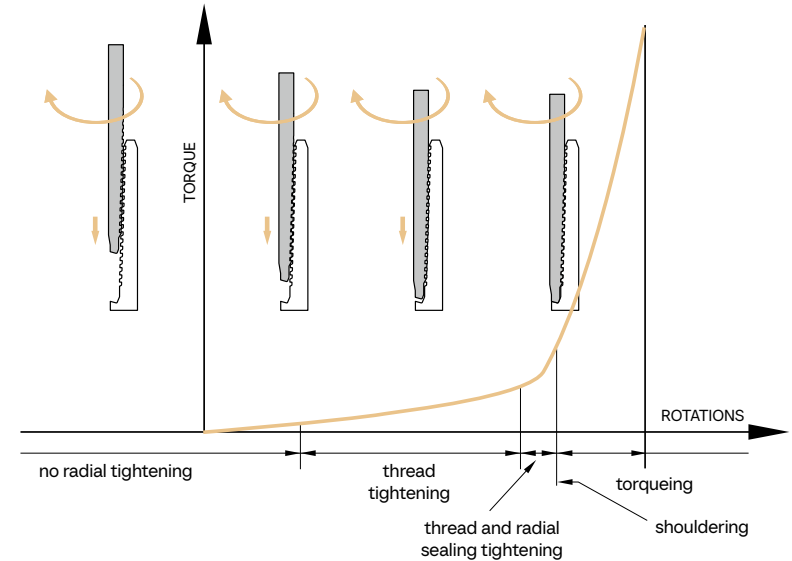


Makeup diagram with low torque gain

Shoulder torque T_{sh} of the connection thrust surfaces (coupling thrust seat and the pipe thrust end) shall be within the range between 5% and 80% of the corrected optimum makeup torque.

Too low T_{sh} on the makeup diagram may be caused by:

- unfavorable combination of process parameters of the matched connection;
- application of improper grease type;
- grease contamination or unfavorable storage conditions.

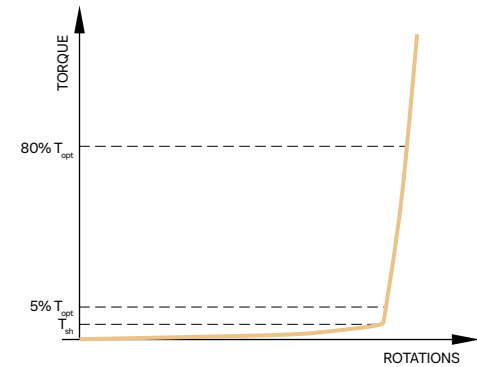


Makeup diagram with low T_{sh}

Unscrew the connection, remove thread compound and inspect. If the results of visual inspection are satisfactory, apply the thread compound of the proper type and quality once again and repeat the making-up.

Too high T_{sh} on the makeup diagram may be caused by:

- the connection thread and/or sealing elements damage;
- improper thread cleaning;
- application of improper compound type;
- compound contamination or high density of the compound (for example, at low temperatures);
- unfavorable combination of process parameters of the matched connection.

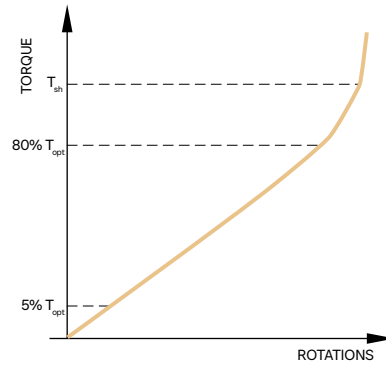


Makeup diagram with high T_{sh}

Unscrew the connection, remove grease and inspect. If the results of visual inspection are satisfactory, apply the grease of the proper type and quality once again and repeat the making-up.


Torque skipping on the makeup diagram may be caused by:

- improper removal of preservation compound from the connection;
- power tongs misalignment;
- insufficient torquing force applied to the connection;
- misalignment of the pipes being connected;
- slippage of the clamping jaws.

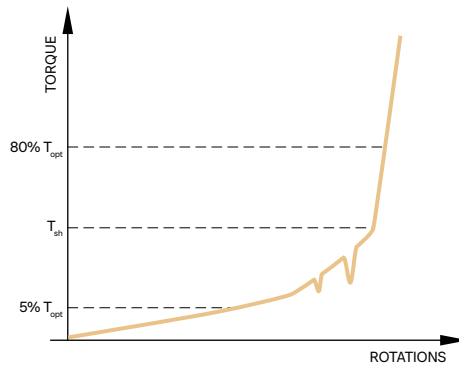

Makeup diagram with high T_{sh}

Unscrew the connection, remove thread compound and inspect. If the results of visual inspection are satisfactory, apply the thread compound of the proper type and quality once again, check the wrench position and repeat the making-up.

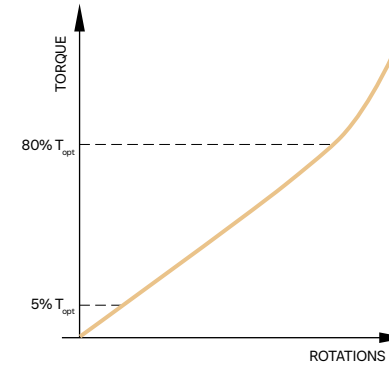


Makeup diagram without distinctive T_{sh}

Makeup curve on the makeup diagram without clear T_{sh} may be caused by:

- thread damage;
- improper thread cleaning;
- unfavorable combination of process parameters of the matched connection.

Unscrew the connection, remove thread compound and inspect. If the results of visual inspection are satisfactory, apply the compound of the proper type and quality once again and repeat the making-up.

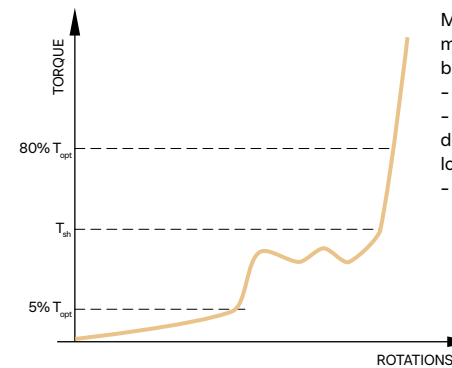

Makeup diagram with "wave" effect, not exceeding T_{sh}

Makeup curve with "wave" effect on the makeup diagram, not exceeding T_{sh} , may be caused by:

- improper thread cleaning;
- thread compound contamination or high density of the compound (for example, at low temperatures);
- excessive amount of compound.

Unscrew the connection, make sure that the wave effect is not caused by the thread compound quality or its application method, and repeat the making-up. Otherwise, clean the connection and apply the thread compound of the proper type and quality once again and repeat the making-up.

Anyway, if the makeup curve has improper shape, such connection shall be unscrewed. Connections, shall be cleaned from thread compound and inspected. If no damage is detected during such visual examination, apply the thread compound of the proper type and quality to the connection, check the equipment installation and repeat the making-up. If the result of the repeated making-up is similar to the results of the first making-up, such pipe shall be rejected and replaced with a new pipe for making-up with the same coupling. If the resulted curve is of improper shape when making-up the second pipe with the same coupling, such pipe shall be removed from the well together with the coupling and rejected.

Makeup quality control

Threaded connection making-up control shall be carried out according to the makeup diagram.

If necessary, the quality of the threaded connection making-up may be controlled:


- according to the makeup control marks on the pipe and the coupling;
- according to the coupling end position in relation to the triangle identification mark.

Making-up with different wall thickness and/or of different strength groups

When making-up pipes with couplings made of steels of different strength grades and having different wall thicknesses, it is necessary to use the make-up torque value for the lowest strength grade and corresponding to the smallest wall thickness. In this case, the performance characteristics of the column are limited by the minimum performance of the pipes assembled to the couplings.

**Threaded connections “Premium”
TMK UP Series**

The connections are made on drill pipe, casing, and tubing strings, intended for a variety of applications. The connections may be used in vertical, deviated, horizontal wells of oil, gas and gas condensate fields in complicated operation conditions (high tensile, compressive, bending loads, excessive torque; aggressive environments, containing H₂S and CO₂; low and high temperatures).

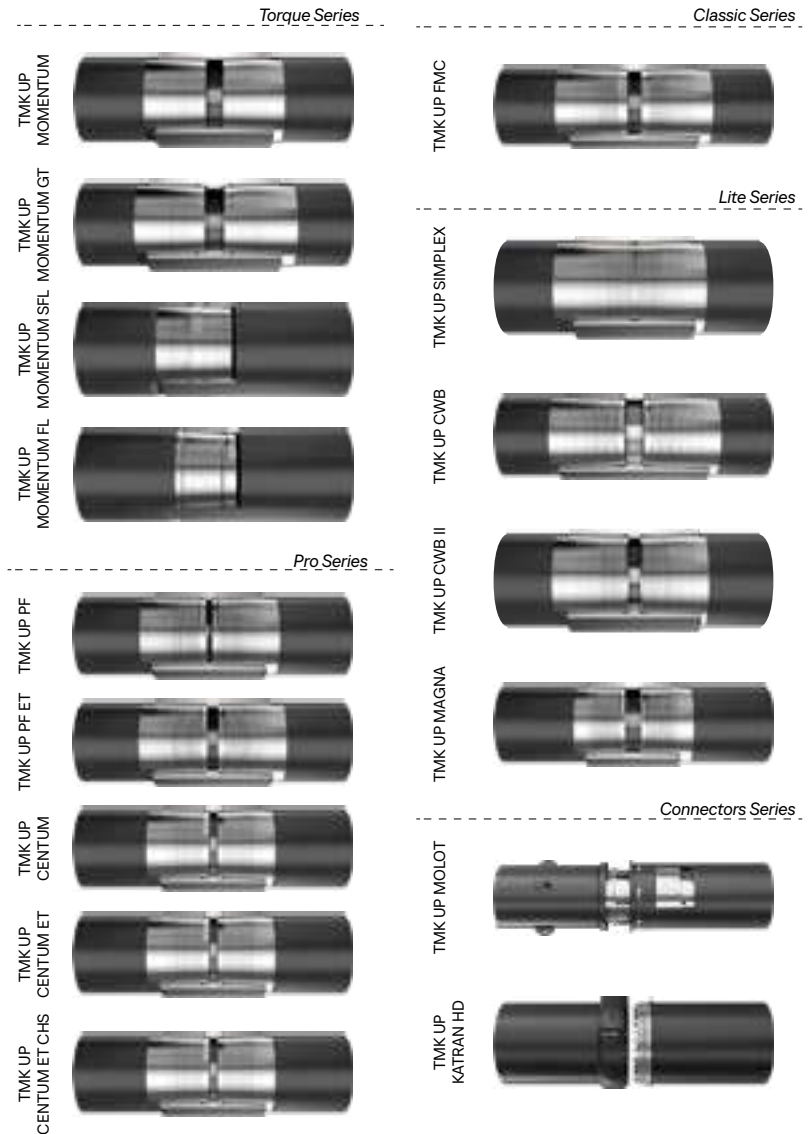


Pipe diameter range, manufactured with threaded connections of "Premium" class. TMK UP Series

Outside diameter of pipe		TMK UP PF	TMK UP PF ET	TMK UP CENTUM	TMK UP CENTUM ET	TMK UP CENTUM ET CHS	TMK UP FMC	TMK UP SIMPLEX	TMK UP CWB	TMK UP CWB II	TMK UP MAGNA	TMK UP MOMENTUM	TMK UP MOMENTUM GT	TMK UP MOMENTUM SFL	TMK UP MOMENTUM FL	TMK UP MOLOT	TMK UP KATRAN HD
in	mm																
2 3/8	60,32																
2 7/8	73,02																
3 1/2	88,90																
4	101,60																
4 1/2	114,30																
5	127,00																
5 1/2	139,70																
5 3/4	146,05																
6 5/8	168,28																
7	177,80																
7 5/8	193,68																
7 3/4	196,85																
8 5/8	219,08																
9 5/8	244,48																
9 7/8	250,83																
10 3/4	273,05																
11 3/4	298,45																
11 7/8	301,63																
12 3/4	323,85																
13 3/8	339,72																
13 5/8	346,08																
14	355,60																
16	406,40																
16 7/9	425,45																
18 5/8	473,08																
20	508,00																
30	762,00																

Special couplings

Pipes with threaded and coupled connections TMK UP Series can be supplied with special couplings which have reduced outside diameter.

Critical cross-section area of such special coupling is less than the pipe critical cross-section. For ensuring uniform strength of the threaded connection a special grade coupling shall belong to the higher strength group compared to the pipe.

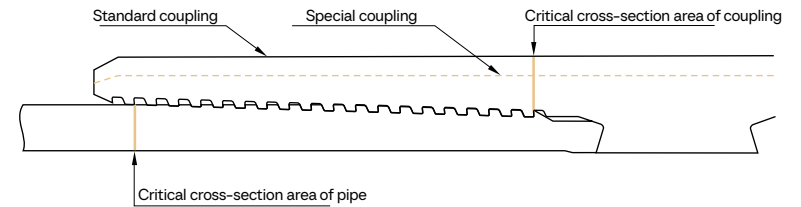

Critical cross-section areas of pipe and coupling

Recommendations for selection of special couplings see on page 36-37.

Guidelines for selection of steel grades for special couplings

Outside diameter of pipe, mm	Pipe wall thickness, mm	Outside diameter of special coupling, mm	Pipes with steel grades J55, K55	Pipes with steel grades N80, L80	Pipes with steel grades C90	Pipes with steel grades R95, C95, T95	TPipes with steel grades P110
			Steel grades of special couplings				
73,02	5,51	83,20	J55, K55	N80, L80	C90	R95, C95, T95	P110
	7,01		N80, L80	R95, C95, T95	P110	P110	-
	7,82		N80, L80	P110	-	-	-
	8,64		N80, L80	-	-	-	-
	9,96		R95, C95	-	-	-	-
	11,18		R95, C95	-	-	-	-
88,90	5,49	98,10	J55, K55	N80, L80	C90	R95, C95, T95	P110
	6,45		N80, L80	R95, C95, T95	P110	P110	-
	7,34		N80, L80	P110	-	-	-
	9,52		R95, C95	-	-	-	-
	10,92		P110	-	-	-	-
	12,09		P110	-	-	-	-
114,30	7,37	123,82	N80, L80	R95, C95, T95	P110	Q125	-
	8,56		N80, L80	P110	-	-	-
127,00	7,52	136,52	N80, L80	R95, C95	P110	-	-
	9,19		N80, L80	P110	-	-	-
	11,10		R95, C95	-	-	-	-
	12,14		P110	-	-	-	-
139,70	6,98	149,22	N80, L80	R95, C95	P110	-	-
	7,72		N80, L80	R95, C95	P110	-	-
	9,17		N80, L80	P110	-	-	-
	10,54		R95, C95, T95	-	-	-	-
146,05	7,00	156,00	N80, L80	R95, C95	-	-	-
	7,70		N80, L80	R95, C95	-	-	-
	8,50		N80, L80	P110	-	-	-
	9,50		N80, L80	P110	-	-	-
	10,70		R95, C95	-	-	-	-
168,28	7,32	177,80	N80, L80	R95, C95	P110	-	-
	8,94		N80, L80	P110	-	-	-
			R95, C95	-	-	-	-
	12,06		R95, C95	-	-	-	-

Guidelines for selection of steel grades for special couplings


Outside diameter of pipe, mm	Pipe wall thickness, mm	Outside diameter of special coupling, mm	Pipes with steel grades J55, K55	Pipes with steel grades N80, L80	Pipes with steel grades C90	Pipes with steel grades R95, C95, T95	Pipes with steel grades P110
			Steel grades of special couplings				
177,80	8,05	187,32	N80, L80	R95, C95	P110	-	-
	9,19		N80, L80	P110	-	-	-
	10,36		R95, C95	-	-	-	-
	11,51		R95, C95	-	-	-	-
	12,65		P110	-	-	-	-
193,68	8,33	206,38	N80, L80	R95, C95	-	-	-
	9,52		N80, L80	R95, C95	-	-	-
	10,92		N80, L80	P110	-	-	-
	12,70		N80, L80	-	-	-	-
	14,27		R95, C95	-	-	-	-
219,08	8,94	231,78	N80, L80	R95, C95	P110	-	-
	10,16		N80, L80	R95, C95	P110	-	-
	11,43		N80, L80	P110	-	-	-
	12,70		N80, L80	-	-	-	-
	14,15		R95, C95	-	-	-	-
244,48	8,94	257,18	N80, L80	R95, C95	P110	-	-
	10,03		N80, L80	R95, C95	-	-	-
	11,05		N80, L80	P110	-	-	-
	11,99		N80, L80	P110	-	-	-
	13,84		R95, C95	-	-	-	-
15,11	R95, C95	-	-	-	-		

Notes:
1. Selection of steel grade of special couplings for pipes with special properties and pipes with thick walls is upon agreement with TMK-Premium Service.
2. Dash in the table means that the making-up with a special grade coupling is not applicable.

Coupling with special bevel

For facilitating the string run into the well with complex geometry, standard couplings may be manufactured with a special bevel.

Spiders or slip elevators are mandatory during string landing, if couplings with a special bevel are used.

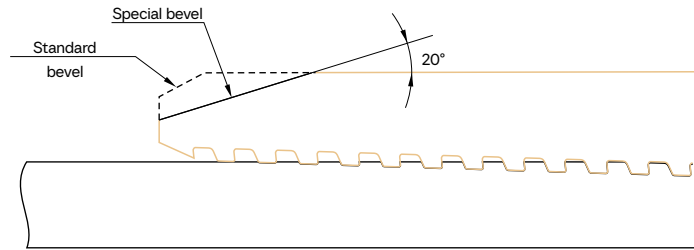

Standard coupling with special bevel




GREENWELL®

GreenWell

GreenWell – is a solid plating with polymer matrix.

Main advantages of applying this technology:

- GreenWell Technology is available for the most connections of TMK UP Series;
- Performs dual function: provides corrosion resistance during transportation and creates the necessary friction coefficient to provide multiple assembly;
- Pipes are immediately ready for running. No need to remove rust-preventing grease and apply operating compound;
- Saving time for casing preparation up to 90% and running operations – up to 20%;
- Reducing of pipe total cost by 10% through increasing the rig operating efficiency;
- Prevents contamination of the connection. No adhesion of sand or other hazardous particles;
- Increases the efficiency of operations of the drilling services;
- Provides protection of environment from pollution by thread compound.

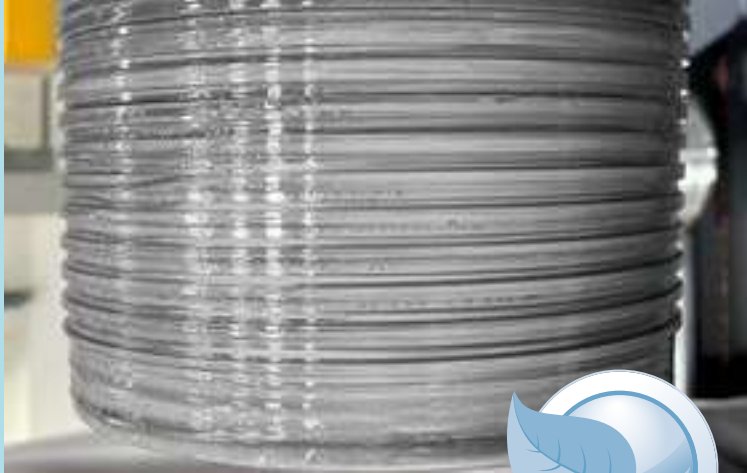

GREENWELL®
Crystal

GreenWell CRYSTAL

GreenWell Crystal – thread compound for gas-tight Premium connections.

Main advantages of applying this technology:

- Saving time for casing preparing and running operations due to fewer operations
- Visual inspection of thread and sealing without thread compound removal
- Applicable for chromium casing and tubing
- Provides multiple makeup and breakout:
 - 3-times for casing
 - 9-times for tubing
 - re-makeup after storage
- Operation at -50°C to +50°C
- Storage at -60°C to +60°C

SERIES

Torque

The Torque series are high torque wedge threaded connections designed to withstand the extreme torsional loads encountered in the construction of extended reach wells.

TMK UP™ MOMENTUM



TMK UP™ MOMENTUM GT



TMK UP™ MOMENTUM SFL



TMK UP™ MOMENTUM FL




TORQUES SERIES / TMK UP™

Momentum

TMK UP
MOMENTUM



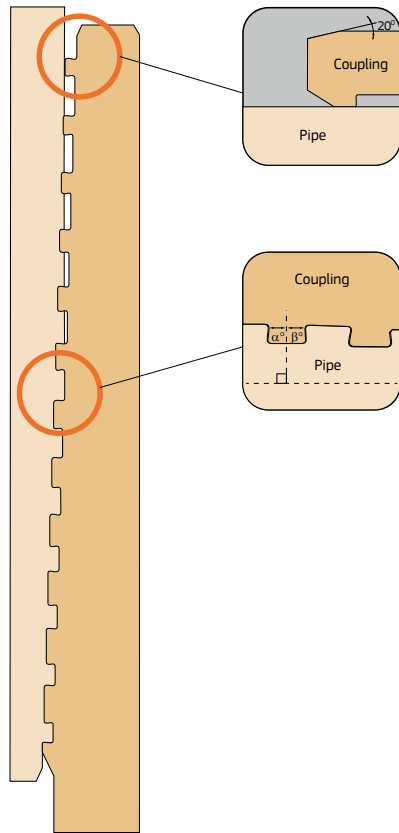

Threaded connection TMK UP MOMENTUM

High-torque T&C liquid-tight connection with wedge thread profile. Designed for safe operation under extreme torsional loads (casing while drilling, including ERD-wells, etc.) in the construction of oil wells.

Range: 4 1/2"–9 5/8" / 114.30 mm–244.48 mm


Unique Feature:

- 100%** compression efficiency
- 100%** tension efficiency
- Sealability through thread compound
- Variable pitch of wedge thread provides 1.5 to 2 times higher operating torque than connections with constant pitch

Application:

- Deviated and horizontal wells, ERD wells
- Overlapping of formations with low gas to oil rating
- RIH with rotation
- Cementing with rotation
- Casing while Drilling (CwD)

TMK UP MOMENTUM Performance Envelope

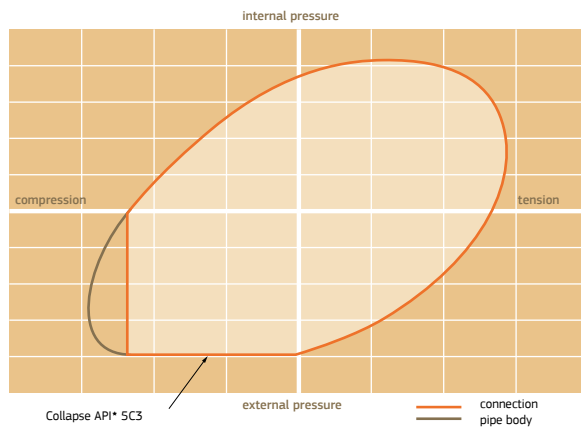

TMK UP MOMENTUM

Geometrical parameters of pipes with threaded connection TMK UP MOMENTUM

Nominal pipe diameter	Pipe specific weight	Pipe wall thickness	Weight of plain-end pipes	Removed metal weight (both ends)	Coupling weight		Pipe cross-section area	Critical C/S area of coupling	Critical C/S area of special coupling	Inside diameter of coupling	Outside diameter of special coupling	Outside diameter of special coupling	Coupling length	Drift diameter	Length make-up loss
					Regular	Special									
in	mm	mm	kg/m	kg	kg	kg	mm ²	mm ²	mm ²	mm	mm	mm	mm	mm	mm
4 1/2	15.1	8.56	22.32	0.66	5.06	4.12	2844	3199	2686	97.18	127.0	124.4	232	94	106
	17	9.65	24.9	0.67	6.92	4.12	3173	4327	2686	95	132.1	124.4	232	91.82	106
	18.9	10.92	27.84	0.68	6.92	4.12	3547	4327	2686	92.46	132.1	124.4	232	89.28	106
5	21.5	12.70	31.82	0.69	6.92	4.12	4054	4237	2686	88.9	132.1	124.4	232	85.72	106
	15	7.52	22.16	0.94	6.82	4.84	2823	4068	3025	123.6	141.3	136.52	244	108.78	111
	18	9.19	26.7	0.95	6.82	4.84	3401	4068	3025	122	141.3	136.52	244	105.44	111
5 1/2	20.3	10.36	29.81	0.96	6.82	4.84	3796	4068	3025	119	141.3	136.52	244	103.1	111
	17	7.72	25.13	1.16	7.46	5.4	3201	4381	3322	123.6	153.67	149.22	250	121.08	114
	20	9.17	29.52	1.2	7.46	5.4	3760	4381	3322	122	153.67	149.22	250	118.18	114
7	23	10.54	33.57	1.22	7.46	5.1	4277	4381	3322	119	153.67	149.22	250	115.44	114
	23	8.05	33.7	1.1	13.56	7.76	4293	7946	4874	161.68	200.03	190	240	158.52	105
	26	9.19	38.21	1.1	13.56	7.76	4868	7946	4874	159.4	200.03	190	240	156.24	105
9 5/8	29	10.36	42.78	1.1	13.56	7.76	5450	7946	4874	157.06	200.03	190	240	153.9	105
	32	11.51	47.2	1.1	13.56	7.76	6013	7946	4874	154.76	200.03	190	240	151.6	105
	35	12.65	51.52	1.1	13.56	7.76	6563	7946	4874	152.48	200.03	190	240	149.32	105
9 5/8	40	10.03	57.99	1.3	21	11.1	6615	12154	6897	226.6	269.88	257.18	240	222.63	105
	43.5	11.05	63.61	1.3	21	11.1	7388	12154	6897	224.42	269.88	257.18	240	220.45	105
	47	11.99	68.75	1.3	21	11.1	8757	12154	6897	220.5	269.88	257.18	240	216.53	105
9 5/8	53.5	13.84	78.72	1.3	21	11.1	10028	12154	6897	216.8	269.88	257.18	240	212.83	105

We draw your attention to the fact that technical characteristics are for reference only, and any person who uses this information should check its relevance, by contacting the technical department: techsales@tmk-group.com

Geometrical parameters of pipes with threaded connection TMK UP MOMENTUM


Nominal pipe diameter	Pipe specific weight	Pipe wall thickness	Yield Strength in Tension, kN		Minimum Internal Yield Pressure, MPa		Collapse Pressure, MPa																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																									
			Minimum yield strength	Yield strength	Minimum yield strength	Internal yield strength	Minimum yield strength	Internal yield strength																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																								
in	mm	mm	MPa	kN	MPa	MPa	MPa	MPa	MPa																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																							
4 1/2	15.1	8.56	379	552	621	655	758	862	931	966	1035	1131	1203	1268	1312	1333	144	149.2	157.8	166.9	178.9	184	190.8	204.4																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																								
	17	9.65	1078	1570	1766	1863	2155	2451	2647	2747	3139	497	723	81	85.8	99.3	113	122	126.6	135.6	152.9	161.5	173	187.8	201.3	213	227.7	239.5	251.9	264.8	278.8	293.8	309.8	326.8	343.8	361.8	380.8	400.8	420.8	440.8	460.8	480.8	500.8	520.8	540.8	560.8	580.8	600.8	620.8	640.8	660.8	680.8	700.8	720.8	740.8	760.8	780.8	800.8	820.8	840.8	860.8	880.8	900.8	920.8	940.8	960.8	980.8	1000.8	1020.8	1040.8	1060.8	1080.8	1100.8	1120.8	1140.8	1160.8	1180.8	1200.8	1220.8	1240.8	1260.8	1280.8	1300.8	1320.8	1340.8	1360.8	1380.8	1400.8	1420.8	1440.8	1460.8	1480.8	1500.8	1520.8	1540.8	1560.8	1580.8	1600.8	1620.8	1640.8	1660.8	1680.8	1700.8	1720.8	1740.8	1760.8	1780.8	1800.8	1820.8	1840.8	1860.8	1880.8	1900.8	1920.8	1940.8	1960.8	1980.8	2000.8	2020.8	2040.8	2060.8	2080.8	2100.8	2120.8	2140.8	2160.8	2180.8	2200.8	2220.8	2240.8	2260.8	2280.8	2300.8	2320.8	2340.8	2360.8	2380.8	2400.8	2420.8	2440.8	2460.8	2480.8	2500.8	2520.8	2540.8	2560.8	2580.8	2600.8	2620.8	2640.8	2660.8	2680.8	2700.8	2720.8	2740.8	2760.8	2780.8	2800.8	2820.8	2840.8	2860.8	2880.8	2900.8	2920.8	2940.8	2960.8	2980.8	3000.8	3020.8	3040.8	3060.8	3080.8	3100.8	3120.8	3140.8	3160.8	3180.8	3200.8	3220.8	3240.8	3260.8	3280.8	3300.8	3320.8	3340.8	3360.8	3380.8	3400.8	3420.8	3440.8	3460.8	3480.8	3500.8	3520.8	3540.8	3560.8	3580.8	3600.8	3620.8	3640.8	3660.8	3680.8	3700.8	3720.8	3740.8	3760.8	3780.8	3800.8	3820.8	3840.8	3860.8	3880.8	3900.8	3920.8	3940.8	3960.8	3980.8	4000.8	4020.8	4040.8	4060.8	4080.8	4100.8	4120.8	4140.8	4160.8	4180.8	4200.8	4220.8	4240.8	4260.8	4280.8	4300.8	4320.8	4340.8	4360.8	4380.8	4400.8	4420.8	4440.8	4460.8	4480.8	4500.8	4520.8	4540.8	4560.8	4580.8	4600.8	4620.8	4640.8	4660.8	4680.8	4700.8	4720.8	4740.8	4760.8	4780.8	4800.8	4820.8	4840.8	4860.8	4880.8	4900.8	4920.8	4940.8	4960.8	4980.8	5000.8	5020.8	5040.8	5060.8	5080.8	5100.8	5120.8	5140.8	5160.8	5180.8	5200.8	5220.8	5240.8	5260.8	5280.8	5300.8	5320.8	5340.8	5360.8	5380.8	5400.8	5420.8	5440.8	5460.8	5480.8	5500.8	5520.8	5540.8	5560.8	5580.8	5600.8	5620.8	5640.8	5660.8	5680.8	5700.8	5720.8	5740.8	5760.8	5780.8	5800.8	5820.8	5840.8	5860.8	5880.8	5900.8	5920.8	5940.8	5960.8	5980.8	6000.8	6020.8	6040.8	6060.8	6080.8	6100.8	6120.8	6140.8	6160.8	6180.8	6200.8	6220.8	6240.8	6260.8	6280.8	6300.8	6320.8	6340.8	6360.8	6380.8	6400.8	6420.8	6440.8	6460.8	6480.8	6500.8	6520.8	6540.8	6560.8	6580.8	6600.8	6620.8	6640.8	6660.8	6680.8	6700.8	6720.8	6740.8	6760.8	6780.8	6800.8	6820.8	6840.8	6860.8	6880.8	6900.8	6920.8	6940.8	6960.8	6980.8	7000.8	7020.8	7040.8	7060.8	7080.8	7100.8	7120.8	7140.8	7160.8	7180.8	7200.8	7220.8	7240.8	7260.8	7280.8	7300.8	7320.8	7340.8	7360.8	7380.8	7400.8	7420.8	7440.8	7460.8	7480.8	7500.8	7520.8	7540.8	7560.8	7580.8	7600.8	7620.8	7640.8	7660.8	7680.8	7700.8	7720.8	7740.8	7760.8	7780.8	7800.8	7820.8	7840.8	7860.8	7880.8	7900.8	7920.8	7940.8	7960.8	7980.8	8000.8	8020.8	8040.8	8060.8	8080.8	8100.8	8120.8	8140.8	8160.8	8180.8	8200.8	8220.8	8240.8	8260.8	8280.8	8300.8	8320.8	8340.8	8360.8	8380.8	8400.8	8420.8	8440.8	8460.8	8480.8	8500.8	8520.8	8540.8	8560.8	8580.8	8600.8	8620.8	8640.8	8660.8	8680.8	8700.8	8720.8	8740.8	8760.8	8780.8	8800.8	8820.8	8840.8	8860.8	8880.8	8900.8	8920.8	8940.8	8960.8	8980.8	9000.8	9020.8	9040.8	9060.8	9080.8	9100.8	9120.8	9140.8	9160.8	9180.8	9200.8	9220.8	9240.8	9260.8	9280.8	9300.8	9320.8	9340.8	9360.8	9380.8	9400.8	9420.8	9440.8	9460.8	9480.8	9500.8	9520.8	9540.8	9560.8	9580.8	9600.8	9620.8	9640.8	9660.8	9680.8	9700.8	9720.8	9740.8	9760.8	9780.8	9800.8	9820.8	9840.8	9860.8	9880.8	9900.8	9920.8	9940.8	9960.8	9980.8	10000.8	10020.8	10040.8	10060.8	10080.8	10100.8	10120.8	10140.8	10160.8	10180.8	10200.8	10220.8	10240.8	10260.8	10280.8	10300.8	10320.8	10340.8	10360.8	10380.8	10400.8	10420.8	10440.8	10460.8	10480.8	10500.8	10520.8	10540.8	10560.8	10580.8	10600.8	10620.8	10640.8	10660.8	10680.8	10700.8	10720.8	10740.8	10760.8	10780.8	10800.8	10820.8	10840.8	10860.8	10880.8	10900.8	10920.8	10940.8	10960.8	10980.8	11000.8	11020.8	11040.8	11060.8	11080.8	11100.8	11120.8	11140.8	11160.8	11180.8	11200.8	11220.8	11240.8	11260.8	11280.8	11300.8	11320.8	11340.8	11360.8	11380.8	11400.8	11420.8	11440.8	11460.8	11480.8	11500.8	11520.8	11540.8	11560.8	11580.8	11600.8	11620.8	11640.8	11660.8	11680.8	11700.8	11720.8	11740.8	11760.8	11780.8	11800.8	11820.8	11840.8	11860.8	11880.8	11900.8	11920.8	11940.8	11960.8	11980.8	12000.8	12020.8	12040.8	12060.8	12080.8	12100.8	12120.8	12140.8	12160.8	12180.8	12200.8	12220.8	12240.8	12260.8	12280.8	12300.8	12320.8	12340.8	12360.8	12380.8	12400.8	12420.8	12440.8	12460.8	12480.8	12500.8	12520.8	12540.8	12560.8	12580.8	12600.8	12620.8	12640.8	12660.8	12680.8	12700.8	12720.8	12740.8	12760.8

TORQUES SERIES / TMK UP™


Momentum GT

TMK UP
MOMENTUM
GT



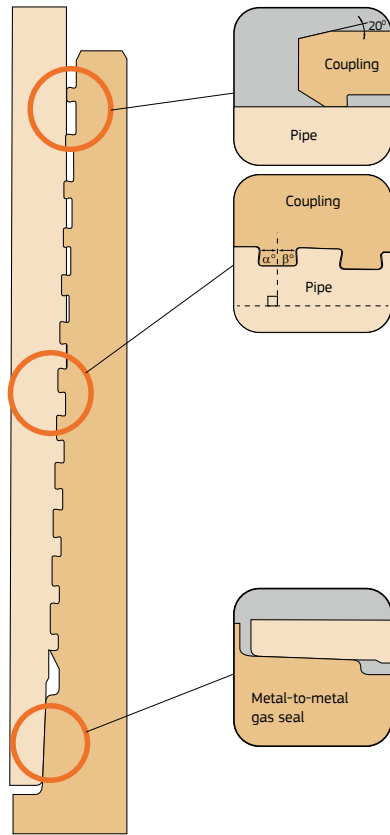

TMK UP MOMENTUM GT
Performance Envelope

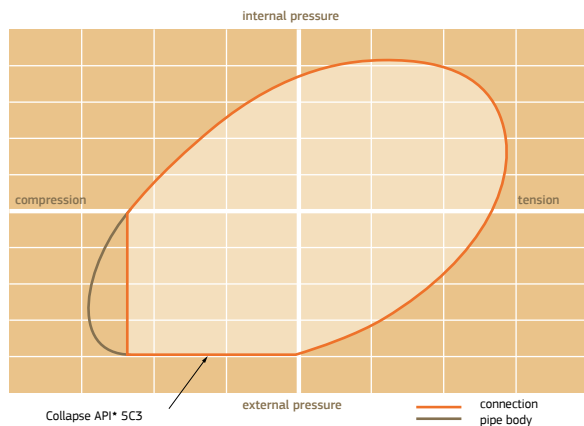

Threaded connection TMK UP MOMENTUM GT

TMK UP Momentum GT is a threaded and coupled high-torque wedge threaded connection. Designed for safe operations under the influence of extreme torsional loads (casing while drilling, including ERD wells, etc.) in the construction of gas wells and wells with a high GOR.

Range: 4 1/2"–10 3/4" / 114.30 mm–273.05 mm

Unique Feature:

- 100%** compression efficiency
- 100%** tension efficiency
- Gas-tight metal-to-metal seal
- Variable pitch of wedge thread provides 1.5 to 2 times higher operating torque than connections with constant pitch

Application:

- Deviated and horizontal wells, ERD wells
- Gas and oil wells
- RIH with rotation
- Cementing with rotation
- Casing while Drilling (CwD)

Nominal pipe diameter	Pipe specific weight	Pipe wall thickness	Weight of plain-end pipes	Removed metal weight (both ends)	Coupling weight		Pipe cross-section area	Critical C/S area of coupling	Critical C/S area of special coupling	Inside diameter of coupling	Outside diameter of coupling	Outside diameter of special coupling	Coupling length	Drift diameter	Length make-up loss
					Regular	Special									
in	mm	mm	kg/m	kg	kg	kg	mm ²	mm ²	mm ²	mm	mm	mm	mm	mm	mm
4 1/2	11,6	6,35	16,91	0,62	4,92	4,04	2154	2657	2143	101,6	127,0	124,4	220	98,42	100
	12,6	6,88	18,23	0,63	4,94	4,06	2322	2857	2143	100,54	127,0	124,4	220	97,36	100
	13,5	7,37	19,44	0,82	4,94	4,06	2476	2857	2143	99,56	127,0	124,4	220	96,38	100
	15,1	8,56	22,32	1,18	6,56	5,46	2844	3092	2578	97,2	127,0	124,4	270	94	120
	17	9,65	24,9	1,2	8,82	5,52	3173	4129	2578	95	132,1	124,4	270	91,82	120
	18,9	10,92	27,84	1,22	8,88	5,58	3547	4129	2578	92,5	132,1	124,4	270	89,28	120
	21,5	12,70	31,82	1,24	8,98	5,68	4054	4129	2578	88,9	132,1	124,4	270	85,72	120
	13,0	6,43	19,12	0,66	6,0	4,28	2436	4674	2266	113,8	141,3	136,5	220	110,96	125
	15	7,52	22,16	1,44	8,59	6,28	2823	3953	2910	123,6	141,3	136,5	280	108,78	123
	18	9,19	26,7	1,48	8,64	6,36	3401	3953	2910	122	141,3	136,5	280	105,44	123
20,3	10,36	29,81	1,5	8,72	6,44	3796	3953	2910	119	141,3	136,5	280	103,1	123	
17	7,72	25,13	1,64	9,21	6,82	3201	4339	3280	123,6	153,7	143,22	290	121,08	128	
20	9,17	29,52	1,68	9,32	6,92	3760	4339	3280	122	153,7	149,22	290	118,18	128	
23	10,54	33,57	1,7	9,4	7	4277	4339	3280	119	153,7	149,22	290	115,44	128	
20	7,32	29,06	1,44	8,59	6,28	2823	3953	2910	122	141,3	136,5	280	105,44	123	
24	8,94	35,13	1,44	8,59	6,28	2823	3953	2910	122	141,3	136,5	280	105,44	123	
24	8,94	35,13	1,44	8,59	6,28	2823	3953	2910	122	141,3	136,5	280	105,44	123	
28	10,59	41,18	1,44	8,59	6,28	2823	3953	2910	122	141,3	136,5	280	105,44	123	
32	12,06	46,46	1,44	8,59	6,28	2823	3953	2910	122	141,3	136,5	280	105,44	123	

We draw your attention to the fact that technical characteristics are for reference only, and any person who uses this information should check its relevance, by contacting the technical department: techsales@tmk-group.com

Nominal pipe diameter	Pipe specific weight	Pipe wall thickness	Weight of plain-end pipes	Removed metal weight (both ends)	Coupling weight		Pipe cross-section area	Critical C/S area of coupling	Critical C/S area of special coupling	Inside diameter of coupling	Outside diameter of coupling	Outside diameter of special coupling	Coupling length	Drift diameter	Length make-up loss
					Regular	Special									
in	mm	mm	kg/m	kg	kg	kg	mm ²	mm ²	mm ²	mm	mm	mm	mm	mm	mm
7	23	8,05	33,7	1,22	17,1	10,4	4293	7647	4574	161,7	200,03	190	280	158,52	120
	26	9,19	38,21	1,24	17,26	10,56	4868	7647	4574	159,4	200,03	190	280	156,24	120
	29	10,36	42,78	1,26	17,42	10,7	5450	7647	4574	157,1	200,03	190	280	153,9	120
	32	11,51	47,2	1,28	17,56	10,86	6013	7647	4574	154,8	200,03	190	280	151,6	120
	35	12,65	51,52	1,3	17,72	11	6563	7647	4574	152,5	200,03	190	280	149,32	120
	34,13	8,94	31,3	2,12	23,62	13,24	5902	10571	5820	201,2	244,48	231,78	280	198,02	120
	35,17	10,16	35,17	2,13	23,82	13,44	6668	10571	5820	198,8	244,48	231,78	280	195,58	120
	39,33	11,43	39,33	2,14	24,00	13,64	7456	10571	5820	196,2	244,48	231,78	280	193,04	120
	43,43	12,70	43,43	2,40	26,42	15,32	8234	10530	5780	193,7	244,48	231,78	300	190,5	125
	48,04	14,15	48,04	2,42	26,84	15,74	9110	10530	5780	190,8	244,48	231,78	300	187,6	125
36	8,94	51,93	1,62	26,36	14,88	6615	11739	6482	226,6	269,88	257,18	280	222,63	120	
40	10,03	57,99	1,64	26,58	15,1	7388	11739	6482	224,2	269,88	257,18	280	220,45	120	
43,5	11,05	63,61	1,66	26,76	15,28	8103	11739	6482	222,38	269,88	257,18	280	218,41	120	
47	11,99	68,75	1,68	26,94	15,46	8757	11739	6482	220,5	269,88	257,18	280	216,53	120	
53,5	13,84	78,72	1,7	27,28	15,8	10028	11739	6482	216,8	269,88	257,18	280	212,83	120	
40,5	8,89	57,91	2,60	29,18	16,44	7378	12973	7146	252,27	298,45	285,75	280	251,3	120	
45,5	10,16	65,87	2,61	29,42	16,70	8391	12973	7146	250,73	298,45	285,75	280	248,76	120	
51	11,43	73,75	2,62	29,68	16,96	9394	12973	7146	250,19	298,45	285,75	280	246,22	120	
55,5	12,57	80,75	2,84	32,68	19,04	10286	13041	7213	247,91	298,45	285,75	300	243,94	125	
60,7	13,84	88,47	2,86	33,00	19,38	11270	13041	7213	245,37	298,45	285,75	300	241,4	125	
65,7	15,11	96,12	-	-	-	12244	13041	7213	242,83	298,45	285,75	300	238,86	125	

We draw your attention to the fact that technical characteristics are for reference only, and any person who uses this information should check its relevance, by contacting the technical department: techsales@tmk-group.com

TMK UP MOMENTUM GT
Straight characteristics of pipes with TMK UP MOMENTUM GT threaded connection

Nominal pipe diameter	Pipe specific weight	Pipe wall thickness	Yield Strength in Tension, kN										Minimum Internal Yield Pressure, MPa										Collapse Pressure, MPa																																								
			Minimum yield strength MPa/ksi										Minimum yield strength MPa/ksi										Minimum yield strength MPa/ksi																																								
			379	552	621	655	758	862	931	966	1035	379	552	621	655	758	862	931	966	1035	379	552	621	655	758	862	931	966	1035																																		
in	mm	mm	55	80	90	95	110	125	135	140	150	155	160	170	180	190	200	210	220	230	240	250	260	270	280	290	300	379	552	621	655	758	862	931	966	1035	379	552	621	655	758	862	931	966	1035	379	552	621	655	758	862	931	966	1035	379	552	621	655	758	862	931	966	1035
			816	1189	1337	1411	1632	1856	2005	2080	2377	3638	537	60	63.7	73.7	83.8	90.5	93.9	100.6	34.2	43.8	47	48.4	52.3	55.2	56.7	57.3	58.1	39.9	58.1	65	69	79.8	90.8	98.1	101.8	109	39.5	51.7	56	58	63.5	68.2	70.8	72	74.1	64.2	66.7	73.8	80.1	83.9	85.7	88.9									
4 1/2	114.3	mm	1202	1751	1970	2078	2405	2735	2954	3065	3503	56	81.6	92	96.8	112	127.4	137.6	142.7	152.9	58.7	85.3	96	101.3	117.3	133.3	144	149.2	157.8	42.8	62.3	70	73.9	85.5	97.3	105.1	109	116.8	44.3	59	64.2	66.7	73.8	80.1	83.9	85.7	88.9	109.2	115.7	118.9	124.9												
			1078	1570	1766	1863	2155	2451	2647	2747	3139	497	72.3	81	85.8	99.3	113	122	126.6	135.6	144.1	155.7	65.6	95.4	107.3	113.2	131.2	149.1	161	166.9	178.9	109.2	115.7	118.9	124.9																												
5	127.0	mm	1536	2238	2517	2655	3073	3494	3774	3916	4475	73.7	107.3	121	127.4	147.4	167.6	181	187.8	204.4	75	109	122.7	129.5	149.9	170.4	184	190.8	204.4	127.4	147.4	167.6	181	187.8	204.4	75	109	122.7	129.5	149.9	170.4	184	190.8	204.4	109.2	115.7	118.9	124.9															
			1070	1558	1753	1849	2140	2433	2625	2727	3116	393.3	57.2	64	67.9	78.5	89.3	96.5	100.1	107.2	38.4	50	54.1	56	61	65.4	67.8	68.9	70.7	107.2	129.5	149.9	170.4	184	190.8	204.4	75	109	122.7	129.5	149.9	170.4	184	190.8	204.4	109.2	115.7	118.9	124.9														
5 1/2	139.7	mm	1425	2076	2335	2463	2850	3241	3501	3633	4151	43.5	63.4	71	75.2	87.1	99	106.9	111	118.9	46.6	60.9	66.5	69.1	76.6	83.4	87.5	89.4	92.9	118.9	124.9	131.2	137.6	144.1	155.7	161.5	173	65.6	95.4	107.3	113.2	131.2	149.1	161	166.9	178.9	109.2	115.7	118.9	124.9													
			1070	1558	1753	1849	2140	2433	2625	2727	3116	393.3	57.2	64	67.9	78.5	89.3	96.5	100.1	107.2	38.4	50	54.1	56	61	65.4	67.8	68.9	70.7	107.2	129.5	149.9	170.4	184	190.8	204.4	75	109	122.7	129.5	149.9	170.4	184	190.8	204.4	109.2	115.7	118.9	124.9														
6 5/8	168.28	mm	1289	1878	2112	2228	2578	2932	3167	3286	3755	48	69.9	79	82.9	96	109.2	117.9	122.3	131.1	50.9	72.3	79.4	82.9	92.8	102.2	108	110.8	116.2	117.9	122.3	131.1	137.6	144.1	155.7	161.5	173	65.6	95.4	107.3	113.2	131.2	149.1	161	166.9	178.9	109.2	115.7	118.9	124.9													
			1070	1558	1753	1849	2140	2433	2625	2727	3116	393.3	57.2	64	67.9	78.5	89.3	96.5	100.1	107.2	38.4	50	54.1	56	61	65.4	67.8	68.9	70.7	107.2	129.5	149.9	170.4	184	190.8	204.4	75	109	122.7	129.5	149.9	170.4	184	190.8	204.4	109.2	115.7	118.9	124.9														
7	177.8	mm	1403	2043	2299	2424	2806	3191	3446	3576	4086	28.9	42	47	49.9	57.7	65.6	70.9	73.5	78.8	20.5	24	25.5	26.2	27.8	28.8	29.1	29.2	29.3	73.5	78.8	84.2	87.4	93.6	29.8	37.3	39.6	40.5	42.9	44.4	45.4	46.1	47.4	46.4	47.9	51.5	54.4	55.8	56.3	57.1	109.2	115.7	118.9	124.9									
			1070	1558	1753	1849	2140	2433	2625	2727	3116	393.3	57.2	64	67.9	78.5	89.3	96.5	100.1	107.2	38.4	50	54.1	56	61	65.4	67.8	68.9	70.7	107.2	129.5	149.9	170.4	184	190.8	204.4	75	109	122.7	129.5	149.9	170.4	184	190.8	204.4	109.2	115.7	118.9	124.9														
8 5/8	219.08	mm	1696	2470	2779	2931	3392	3858	4166	4323	4941	35.2	51.3	58	60.9	70.5	80.1	86.6	89.8	96.2	31.4	39.7	42.3	43.5	46.4	48.4	49.3	49.5	50.6	80.1	86.6	89.8	96.2	102.2	108	110.8	116.2	109.2	115.7	118.9	124.9																						
			1070	1558	1753	1849	2140	2433	2625	2727	3116	393.3	57.2	64	67.9	78.5	89.3	96.5	100.1	107.2	38.4	50	54.1	56	61	65.4	67.8	68.9	70.7	107.2	129.5	149.9	170.4	184	190.8	204.4	75	109	122.7	129.5	149.9	170.4	184	190.8	204.4	109.2	115.7	118.9	124.9														
9 5/8	244.48	mm	1988	2896	3258	3436	3977	4522	4884	5068	5792	41.7	60.8	68	72.1	83.5	94.9	102.5	106.4	114	42.6	56.3	61.2	63.6	70.1	75.8	79.2	80.8	83.6	94.9	102.5	106.4	114	124.9	131.2	137.6	144.1	155.7	161.5	173	65.6	95.4	107.3	113.2	131.2	149.1	161	166.9	178.9	109.2	115.7	118.9	124.9										
			1070	1558	1753	1849	2140	2433	2625	2727	3116	393.3	57.2	64	67.9	78.5	89.3	96.5	100.1	107.2	38.4	50	54.1	56	61	65.4	67.8	68.9	70.7	107.2	129.5	149.9	170.4	184	190.8	204.4	75	109	122.7	129.5	149.9	170.4	184	190.8	204.4	109.2	115.7	118.9	124.9														
10 3/4	273.05	mm	2237	3258	3665	3866	4474	5087	5489	5701	6109	27.1	39.4	44.3	46.8	54.1	61.6	66.4	69.0	73.9	17.5	21	22.2	22.6	23.6	23.7	23.7	23.8	23.9	44.3	46.8	54.1	61.6	66.4	69.0	73.9	17.5	21	22.2	22.6	23.6	23.7	23.8	23.9	23.7	23.8	23.9	109.2	115.7	118.9	124.9												
			1070	1558	1753	1849	2140	2433	2625	2727	3116	393.3	57.2	64	67.9	78.5	89.3	96.5	100.1	107.2	38.4	50	54.1	56	61	65.4	67.8	68.9	70.7	107.2	129.5	149.9	170.4	184	190.8	204.4	75	109	122.7	129.5	149.9	170.4	184	190.8	204.4	109.2	115.7	118.9	124.9														

We draw your attention to the fact that technical characteristics are for reference only, and any person who uses this information should check its relevance, by contacting the technical department: techsales@tmk-group.com

TMK UP MOMENTUM GT
Straight characteristics of pipes with TMK UP MOMENTUM GT threaded connection

Straight characteristics of pipes with TMK UP MOMENTUM GT threaded connection


Nominal pipe diameter	Pipe specific weight	Pipe wall thickness	Yield Strength in Tension, kN										Minimum Internal Yield Pressure, MPa										Collapse Pressure, MPa																																								
			Minimum yield strength MPa/ksi										Minimum yield strength MPa/ksi										Minimum yield strength MPa/ksi																																								
			379	552	621	655	758	862	931	966	1035	379	552	621	655	758	862	931	966	1035	379	552	621	655	758	862	931	966	1035																																		
in	mm	mm	55	80	90	95	110	125	135	140	150	155	160	170	180	190	200	210	220	230	240	250	260	270	280	290	300	379	552	621	655	758	862	931	966	1035	379	552	621	655	758	862	931	966	1035	379	552	621	655	758	862	931	966	1035	379	552	621	655	758	862	931	966	1035
			816	1189	1337	1411	1632	1856	2005	2080	2377	3638	537	60	63.7	73.7	83.8	90.5	93.9	100.6	34.2	43.8	47	48.4	52.3	55.2	56.7	57.3	58.1	39.9	58.1	65	69	79.8	90.8	98.1	101.8	109	39.5	51.7	56	58	63.5	68.2	70.8	72	74.1	64.2	66.7	73.8	80.1	83.9	85.7	88.9									
7	177.8	mm	1202	1751	1970	2078	2405	2735	2954	3065	3503	56	81.6	92	96.8	112	127.4	137.6	142.7	152.9	58.7	85.3	96	101.3	117.3	133.3	144	149.2	157.8	42.8	62.3	70	73.9	85.5	97.3	105.1	109	116.8	44.3	59	64.2	66.7	73.8	80.1	83.9	85.7	88.9	109.2	115.7	118.9	124.9												
			1078	1570	1766	1863	2155	2451	2647	2747	3139	497	72.3	81	85.8	99.3	113	122	126.6	135.6	144.1	155.7	65.6	95.4	107.3	113.2	131.2	149.1	161	166.9	178.9	109.2	115.7	118.9	124.9																												
8 5/8	219.08	mm	1536	2238	2517	2655	3073	3494	3774	3916	4475	73.7	107.3	121	127.4	147.4	167.6	181	187.8	204.4	75	109	122.7	129.5	149.9	170.4	184	190.8	204.4	127.4	147.4	167.6	181	187.8	204.4	75	109	122.7	129.5	149.9	170.4	184	190.8	204.4	109.2	115.7	118.9	124.9															
			1070	1558	1753	1849	2140	2433	2625	2727	3116	393.3	57.2	64	67.9	78.5	89.3	96.5	100.1	107.2	38.4	50	54.1	56	61	65.4	67.8	68.9	70.7	107.2	129.5	149.9	170.4	184	190.8	204.4	75	109	122.7	129.5	149.9	170.4	184	190.8	204.4	109.2	115.7	118.9	124.9														
9 5/8	244.48	mm	1403	2043	2299	2424	2806	3191	3446	3576	4086	28.9	42																																																		

TORQUES SERIES / TMK UP™


Momentum SFL



TMK UP
MOMENTUM
SFL

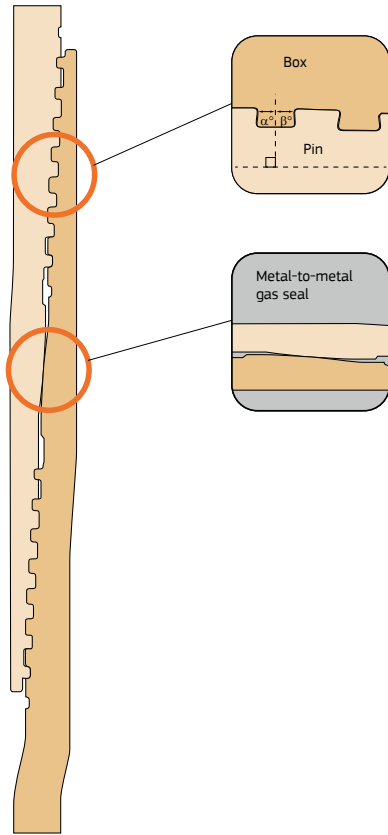

TMK UP MOMENTUM SFL
Performance Envelope

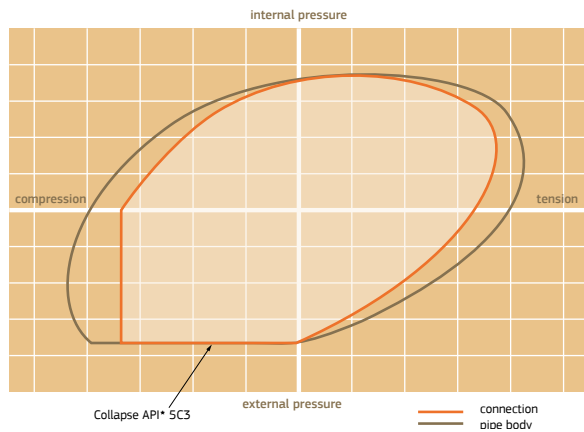

Threaded connection TMK UP MOMENTUM SFL

TMK UP Momentum SFL – high torque premium gas-tight Semi-flush connection with wedge thread profile. Designed for safe exploitation under extreme torsional loads (ERD well constructions) in wells with high gas to oil rating.

The semi-flush contour of this connection allows it to be used in cases where there are restrictions on the dimensions of the used column and threaded and coupled connections are not suitable, but comparable characteristics are required.

Range: 5 1/2"–7" / 139.7 mm–177.8 mm

Unique Feature:


- 85%** compression efficiency
- 85%** tension efficiency
- Gas-tight metal-to-metal seal
- Variable pitch of wedge thread provides 1.5 to 2 times higher operating torque than connections with constant pitch

Application:


- Deviated and horizontal wells, ERD wells
- Gas and oil wells
- RIH with rotation
- Cementing with rotation

TORQUES SERIES / TMK UP™


Momentum FL

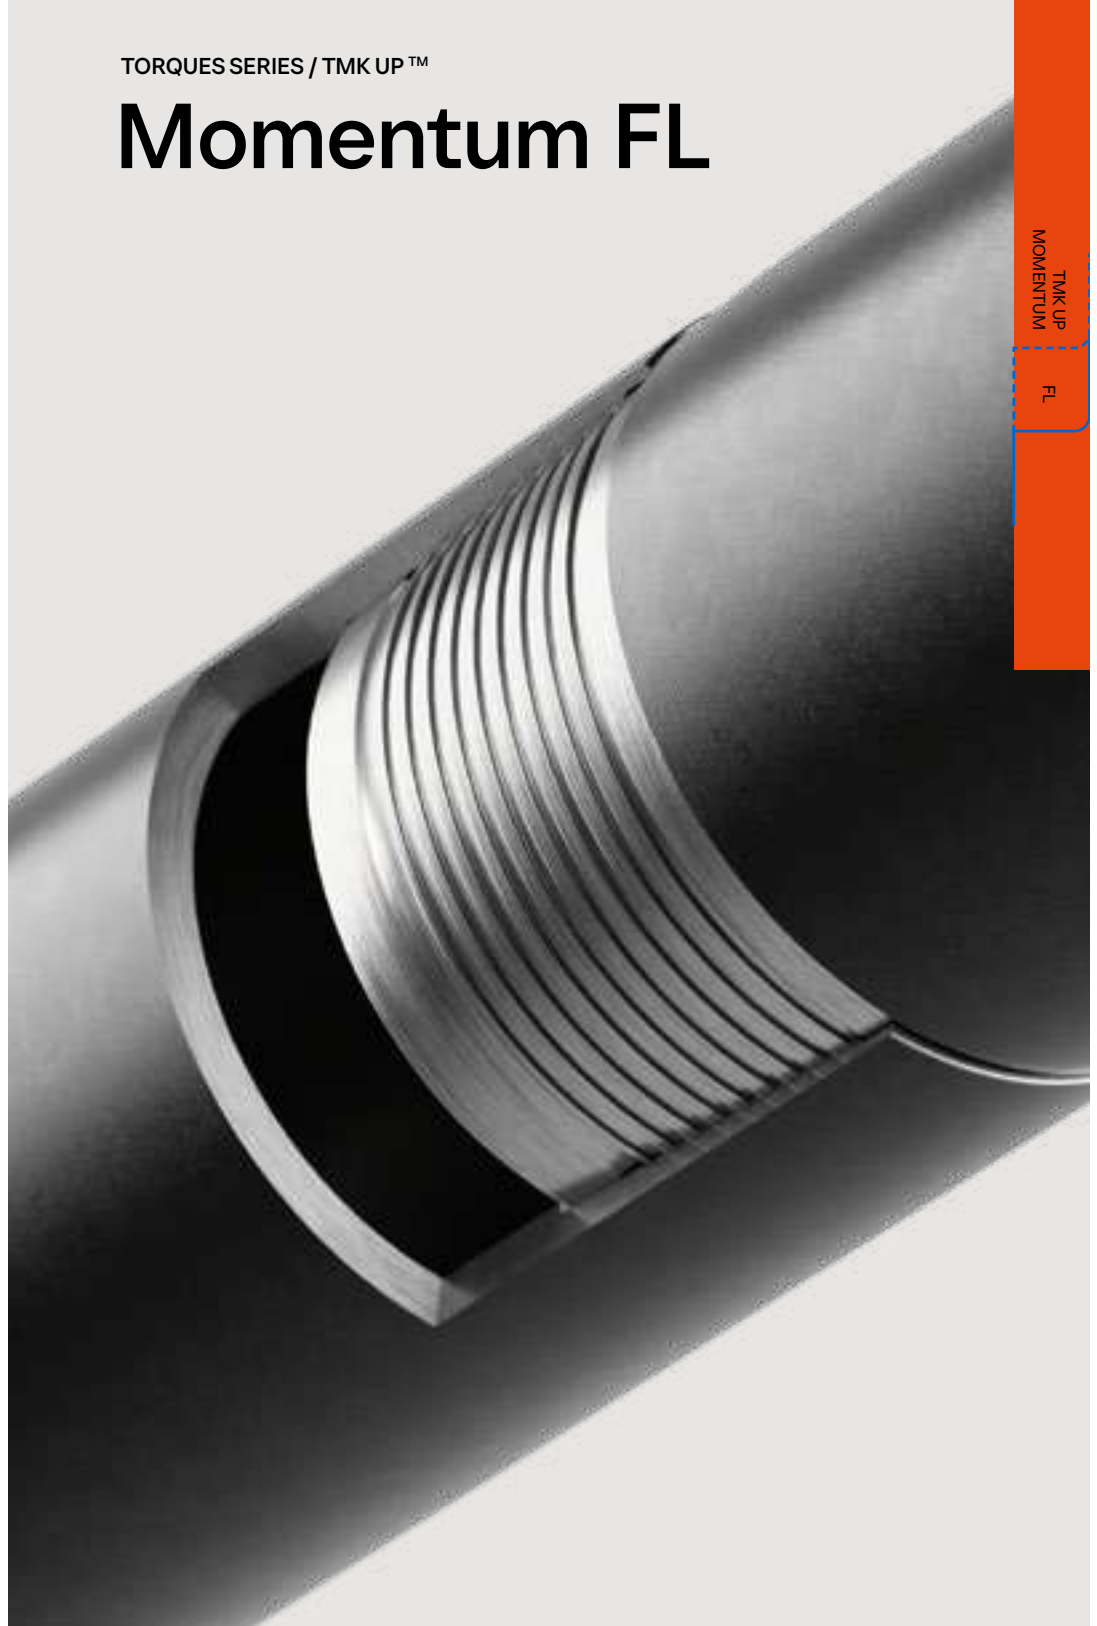

TMK UP
MOMENTUM
FL

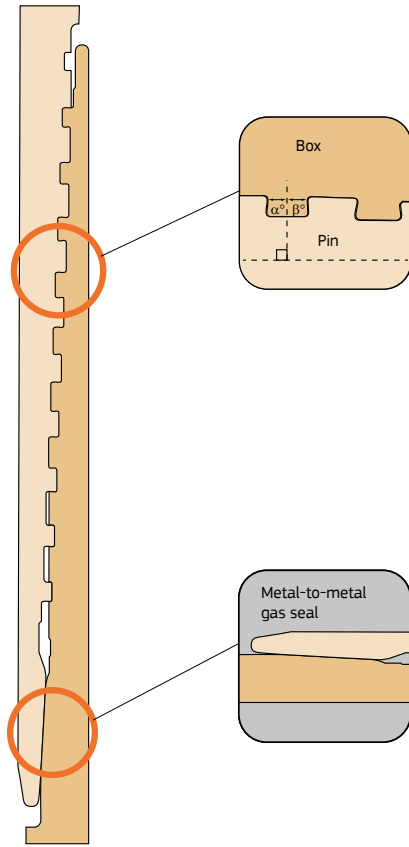

TMK UP MOMENTUM FL
Performance Envelope

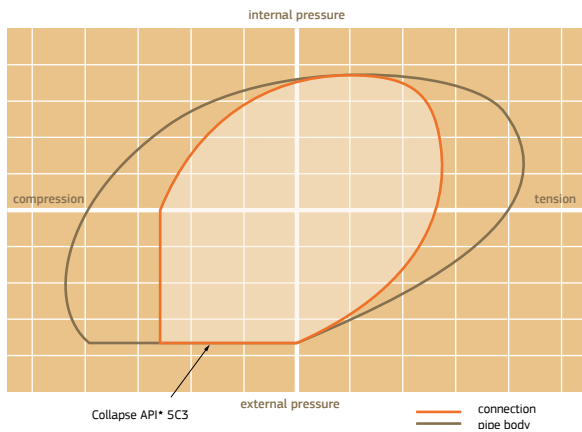

Threaded connection TMK UP MOMENTUM FL

TMK UP Momentum FL – gas-tight premium Integral flush connection with wedge thread, which provides a high range of performance while maintaining the nominal outside diameter of the pipe.

Range: 3 1/2"–16" / 88.9 mm–406.4 mm

Unique Feature:

- Not less than 57% compression efficiency
- Not less than 57% tension efficiency
- Gas-tight metal-to-metal seal
- Variable pitch of wedge thread provides 1.5 to 2 times higher operating torque than connections with constant pitch
- External diameter equal to the diameter of the pipe body, fully flush integral connection

Application:

- Deviated and horizontal wells, ERD wells
- Gas and oil wells
- RIH with rotation
- Cementing with rotation

TMK UP MOMENTUM FL

TMK UP MOMENTUM FL

Nominal pipe diameter	Pipe specific weight	Pipe wall thickness	Weight of plain-end pipes	Pipe cross-section area	Connection C/S area	Box ID	Box OD	Drift diameter	Special Drift diameter	Length makeup loss
3 1/2	8.81	6.43	1312	1671	986	74.7	88.9	72.82	-	85.5
	10.46	6.65	1560	1984	1210	86.9	101.6	85.12	-	92.0
	11.35	7.26	1689	2152	1313	85.5	101.6	83.90	-	94.5
4	12.95	8.38	1926	2454	1497	83.3	101.6	83.30	-	94.0
	11.36	6.91	1691	2154	1314	100.1	114.3	92.0	-	98.42
	12.60	6.88	1823	2322	1416	98.60	114.30	97.36	-	94.00
4 1/2	13.50	7.37	1944	2476	1510	98.00	114.30	96.38	-	94.00
	15.10	8.56	2232	2844	1735	114.30	114.30	94.00	-	104.00
	15.00	7.52	2216	2823	1694	110.40	127.00	108.78	-	106.50
5	18.00	9.19	2670	3401	2109	106.70	127.00	105.44	-	110.50
	20.30	10.36	2980	3796	2316	104.50	127.00	103.10	-	120.50
	21.40	11.10	3173	4042	2506	102.90	127.00	101.62	-	120.50
5 1/2	23.20	12.14	3439	4381	2760	100.80	127.00	99.54	-	120.50
	17.00	7.72	2513	3201	1953	122.50	139.70	121.08	-	108.20
	20.00	9.17	2952	3760	2331	118.40	139.70	118.18	-	110.30
5 1/2	23.00	10.54	3357	4277	2652	116.80	139.70	115.44	-	113.90
	26.80	12.70	3978	5067	3142	112.30	139.70	111.12	-	109.20
	24.00	8.94	3514	4475	2819	148.50	168.28	147.22	-	104.00
6 5/8	32.00	12.06	4646	5919	3729	144.16	168.28	140.98	-	116.9
	26.00	9.19	3821	4868	2969	157.80	177.80	156.24	-	104.00
	29.00	10.36	4278	5450	3324	155.30	177.80	153.90	-	104.00
7	32.00	11.51	4720	6013	3728	153.50	177.80	151.60	152.40	109.50
	35.00	12.65	5152	6563	4200	150.70	177.80	149.32	-	112.50
	26.40	8.33	3808	4851	2765	175.60	193.68	173.84	-	106.00
7 5/8	29.70	9.52	4328	5508	3305	172.80	193.68	171.46	-	111.30
	33.70	10.92	4922	6270	3825	170.10	193.68	168.66	-	114.00
	39.00	12.79	5668	7221	4332	166.30	193.68	165.10	-	114.00
13 3/8	67.00	12.10	9846	12543	7649	312.7	339.72	311.37	-	123.50
	72.00	13.06	10521	13402	8057	312.4	339.72	309.63	311.15	123.50
	95.00	14.37	13902	17698	10619	376.6	406.40	372.9	374.65	122.50

We draw your attention to the fact that technical characteristics are for reference only, and any person who uses this information should check its relevance, by contacting the technical department: techsales@tmk-group.com

Strength characteristics of pipes with TMK UP MOMENTUM FL

Nominal pipe diameter	Pipe specific weight	Yield Strength in Tension, kN										Minimum Internal Yield Pressure, MPa										Collapse Pressure, MPa									
		Minimum yield strength MPa/ksi										Minimum yield strength MPa/ksi										Minimum yield strength MPa/ksi									
		379	552	621	655	758	862	931	966	1035	1035	379	552	621	655	758	862	931	966	1035	1035	379	552	621	655	758	862	931	966	1035	1035
3 1/2	8.81	6.43	653	922	1038	1094	1266	1440	1554	1614	1729	48	70	79	83	96	96.2	109.4	118.1	122.7	51	73	80	83	93	103	109	111	117		
	10.46	6.65	752	1095	1232	1299	1504	1504	1710	1845	1916	43	63	71	75.0	86.8	97.1	106.5	110.6	118.6	45	61	66	69	76	83	87	89	92		
	11.35	7.26	815	1188	1336	1409	1631	1855	2001	2079	2227	47	69.0	77.7	81.9	94.8	107.8	116.3	120.8	129.4	50	71	78	81	91	100	105	108	113		
4 1/2	13.50	7.37	572	834	938	989	1145	1302	1405	1459	1563	42.8	62.3	70.1	73.9	85.5	97.3	104.9	109.0	116.8	44.3	59.0	64.2	66.7	73.8	80.1	83.9	85.7	88.9		
	15.10	8.56	657	957	1077	1136	1315	1495	1613	1676	1795	49.7	72.3	81.4	85.8	99.3	113.0	121.9	126.6	135.6	52.6	64.3	68.1	73.8	80.1	83.9	85.7	88.9			
	15.00	7.52	642	935	1052	1109	1284	1460	1575	1636	1753	39.3	57.2	64.3	67.9	78.5	89.3	96.4	100.1	107.2	38.4	50.0	54.1	56.0	61.1	65.4	67.8	68.9	70.7		
5	18.00	9.19	799	1164	1310	1381	1598	1818	1961	2037	2163	48.0	69.9	78.6	82.9	96.0	109.2	117.8	122.3	131.1	50.9	72.3	79.4	82.9	92.8	102.2	108.0	110.8	116.2		
	20.30	10.36	878	1278	1438	1517	1755	1996	2154	2237	2397	54.1	78.8	88.7	93.5	108.2	123.1	132.8	137.9	147.8	56.8	82.7	93.1	98.1	113.6	127.8	136.1	140.1	148.0		
	21.40	11.10	950	1383	1556	1641	1899	2160	2330	2421	2594	58.0	84.4	95.0	100.2	115.9	131.8	142.2	147.8	158.3	60.5	88.1	99.1	104.6	121.1	137.6	148.6	154.1	165.1		
5 1/2	23.20	12.14	1046	1523	1714	1808	2092	2379	2567	2666	2856	63.4	92.3	103.9	109.6	126.8	144.2	155.6	161.6	173.1	65.6	95.4	107.4	113.3	131.2	149.1	161.1	167.0	179.0		
	17.00	7.72	740	1078	1213	1279	1480	1683	1816	1886	2021	36.7	53.4	60.1	63.3	73.3	83.4	89.9	93.4	100.1	33.9	43.3	46.4	47.9	51.5	54.4	55.8	57.1			
	20.00	9.17	884	1287	1448	1527	1767	2010	2168	2252	2413	43.5	63.4	71.3	75.2	87.1	99.0	106.8	110.1	118.9	45.6	60.9	66.5	69.1	76.6	83.4	87.9	89.4	92.9		
6 5/8	23.00	10.54	1005	1464	1647	1737	2010	2286	2466	2561	2744	50.0	72.9	82.0	86.5	100.1	113.8	122.8	127.5	136.7	52.9	77.0	85.4	89.2	100.3	110.8	117.4	120.6	126.8		
	26.80	12.70	1191	1734	1951	2058	2381	2708	2922	3035	3252	60.3	87.8	98.8	104.2	120.6	137.1	148.0	153.7	164.7	62.6	91.2	102.6	108.3	123.5	142.5	154.0	159.7	171.1		
	24.00	8.94	1069	1556	1751	1847	2137	2430	2622	2724	2918	35.2	51.3	57.7	60.9	70.5	80.1	86.5	89.8	96.2	31.4	39.7	42.3	43.5	46.4	48.4	49.3	49.5	50.6		
7	32.00	12.06	1413	2056	2316	2442	2826	3214	3468	3602	3859	47.5	69.2	77.9	82.1	95.1	106.1	116.8	121.2	129.8	50.5	71.1	78.1	81.5	91.2	100.2	105.9	108.6	113.8		
	26.00	9.19	1125	1639	1844	1945	2251	2560	2762	2869	3073	34.3	49.9	56.2	59.2	68.6	78.0	84.1	87.4	93.6	29.8	37.3	39.6	40.5	42.9	44.4	45.4	46.1	47.4		
	29.70	10.36	1260	1835	2064	2177	2520	2866	3092	3211	3441	38.6	56.3	63.3	66.8	77.3	87.9	94.8	98.5	103.5	37.3	48.4	52.2	54.0	58.8	62.8	65.0	65.9	67.5		
7 5/8	33.70	10.92	1450	2111	2375	2505	2899	3297	3557	3695	3958	37.4	54.5	61.3	64.6	74.8	85.1	91.8	95.3	102.1	35.1	45.2	48.6	50.2	54.3	57.5	59.2	59.9	61.0		
	39.00	12.70	1642	2392	2690	2838	3284	3735	4029	4185	4484	43.5	63.3	71.3	75.2	87.0	98.9	106.7	110.8	118.8	40.8	50.8	54.3	56.3	60.3	63.3	64.3	65.3	66.3		
	67.00	12.19	4754	6924	7789	8216	9508	10812	11665	12117	12982	23.8	34.7	39.0	41.1	47.6	54.1	58.4	60.7	65.0	13.4	15.6	16.1	16.2	16.3	16.4	16.5	16.6			
16	72.00	13.06	5080	7398	8323	8779	10159	11553	12464	12947	13872	25.5	37.1	41.8	44.1	51.0	55.0	62.6	65.0	69.6	15.4	18.4	19.2	19.5	19.9	20.1	20.2	20.3			
	95.00	14.37	4025	5862	6594	6955	8049	9153	9876	10268	10991	23.45	34.2	38.4	40.5	46.9	53.3	57.5	59.8	64.0	13.0	15.0	15.3	15.4	15.5	15.6	15.7	15.8	15.9		


Pro

The Pro Series (Professional Series) premium connections feature an extraordinary ability to withstand high tension, compression, and bending loads at excessive internal and external pressures. High tension and compression efficiencies in combination with high operating torques allow for excellent sealability in both onshore and offshore wells. The most of the Pro Series connections have been validated with the stringent requirements of ISO 13679 / API* 5C5 CAL IV.


TMK UP™ PF ET**TMK UP™ PF****TMK UP™ CENTUM****TMK UP™ CENTUM ET****TMK UP™ CENTUM ET CHS**

PRO SERIES / TMK UP™


PF

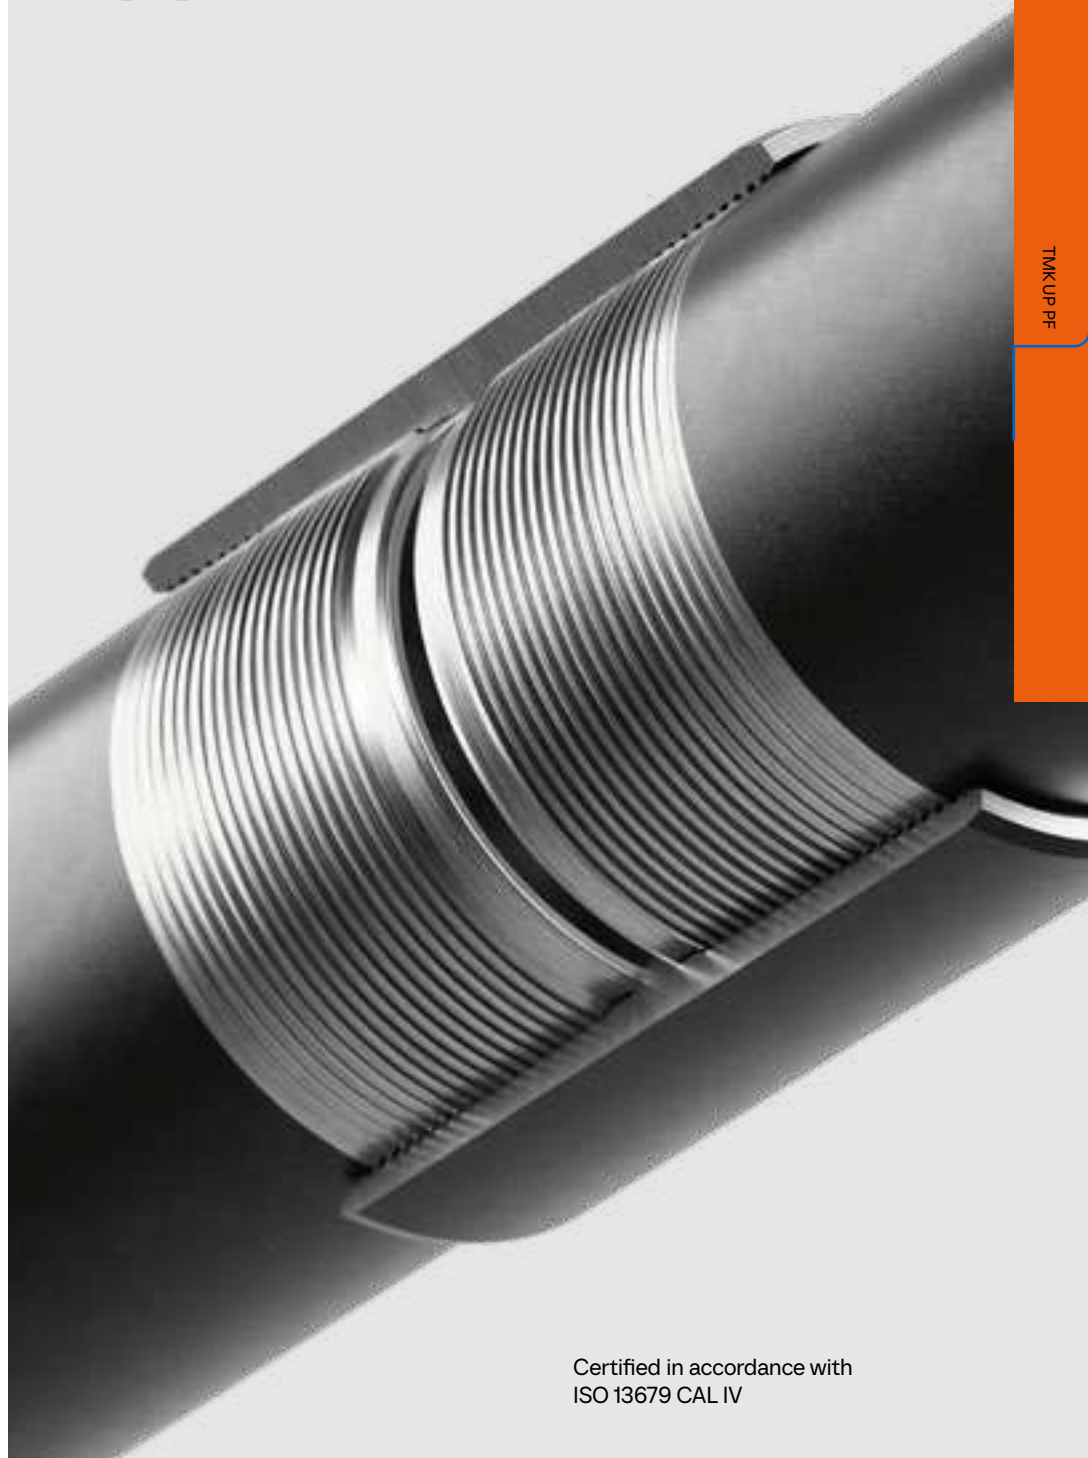

TMK UP PF

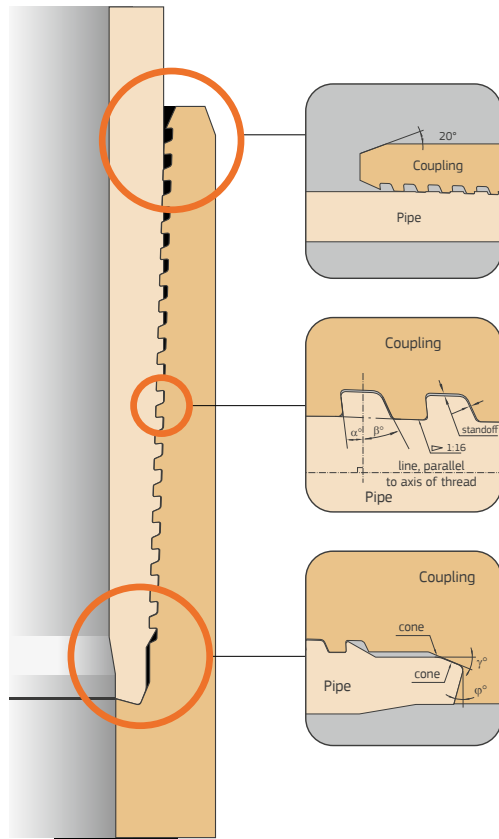

TMK UP PF casing and tubing
Performance Envelope

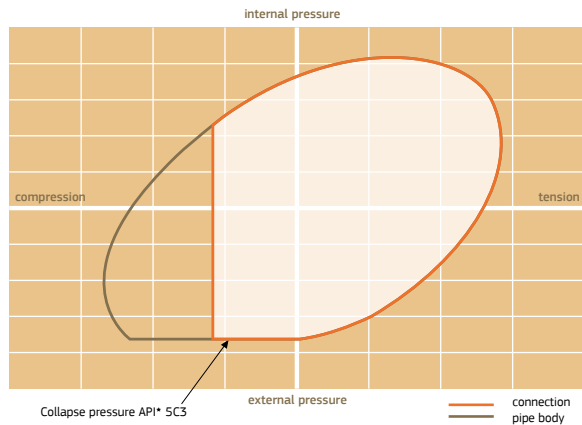

TMK UP PF for Casing and Tubing

TMK UP PF is a threaded and coupled gas-tight connection for highly deviated and horizontal wells. Provides high performance in complex drilling environments (significant bending, compressive, tensile loads, torque, aggressive applications), and ensures a high gas tightness. The high reliability of this connection is confirmed by ISO 13679 CAL IV qualification and long-term experience of supplies for challenging oil and gas projects.

Tubing: 2-3/8"–4-1/2" / 60.32–114.3 mm

Casing: 4-1/2"–13-5/8" / 114.3–346.08 mm

Unique Features:

- 60%** (casing) and 80%** (tubing) compression efficiency
- 100%** tension efficiency
- Metal-to-metal gas-tight seal
- Optimized thread profile offers robust galling resistance
- Over-torque protection during make-up
- Hooked thread profile
- Reduced cross threading

Application:

- Casing and tubing
- Horizontal wells
- Oil and gas wells
- RIH with rotation
- Cementing with rotation
- High pressure
- Complicated well trajectory

Nominal pipe diameter	Pipe specific weight		Pipe wall thickness	Weight of plain-end pipes	Removed metal weight (both ends)	Coupling weight		Pipe cross-section area	Critical C/S area of special coupling	Critical C/S area of special coupling	Inside diameter of coupling	Outside diameter of coupling	Outside diameter of special coupling	Coupling length	Drift diameter	Length makeup loss
	lb/ft	mm				kg	mm									
2 3/8	60,32	4,60	4,83	6,61	0,13	2,00	-	842	1313	689	49,70	73,02	-	165,00	48,28	72,00
		5,80	6,45	8,57	0,13	2,03	-	1092	1313	689	46,50	73,02	-	165,00	45,04	72,00
		6,60	7,49	9,76	0,13	2,05	-	1243	1313	689	45,20	73,02	-	165,00	42,96	72,00
2 7/8	73,02	7,35	8,53	10,89	0,14	2,06	-	1388	1313	689	44,20	73,02	-	165,00	40,88	72,00
		6,40	5,51	9,17	0,17	3,33	2,25	1169	2058	1288	61,20	88,90	83,20	180,00	59,62	74,50
		7,80	7,01	11,41	0,17	3,39	2,30	1454	2058	1288	58,00	88,90	83,20	180,00	56,62	74,50
		8,60	7,82	12,57	0,18	3,41	2,32	1602	2058	1288	57,50	88,90	83,20	180,00	55,00	74,50
		9,35	8,64	13,72	0,19	3,42	2,34	1747	2058	1288	56,70	88,90	83,20	180,00	53,36	74,50
		10,50	9,96	15,49	0,21	3,45	2,36	1973	2058	1288	55,40	88,90	83,20	180,00	50,72	74,50
3 1/2	88,90	11,50	11,18	17,05	0,23	3,49	2,40	2172	2058	1288	53,60	88,90	83,20	180,00	48,28	74,50
		7,70	5,49	11,29	0,25	5,33	2,82	1439	3058	1458	77,00	108,00	98,10	200,00	74,74	82,10
		9,20	6,45	13,12	0,25	5,40	2,88	1671	3058	1458	75,00	108,00	98,10	200,00	72,82	82,10
		10,20	7,34	14,76	0,25	5,42	2,91	1881	3058	1458	73,80	108,00	98,10	200,00	71,04	82,10
		12,70	9,52	18,64	0,29	5,49	2,98	2374	3058	1458	71,70	108,00	98,10	200,00	66,68	82,10
		14,30	10,92	21,00	0,32	5,55	3,04	2675	3058	1458	69,90	108,00	98,10	200,00	63,88	82,10
4	101,60	15,50	12,09	22,90	0,33	5,62	3,10	2917	3058	1458	67,80	108,00	98,10	200,00	61,54	82,10
		17,00	13,46	25,04	0,34	5,69	3,17	3190	3058	1458	65,40	108,00	98,10	200,00	58,80	82,10
		9,50	5,74	13,57	0,35	5,88	3,11	1729	3533	1775	89,70	120,70	111,00	200,00	86,94	90,10
		10,70	6,50	15,24	0,35	5,92	3,15	1942	3533	1775	87,70	120,70	111,00	200,00	85,42	90,10
		10,70	6,65	15,57	0,35	5,92	3,15	1984	3533	1775	87,70	120,70	111,00	200,00	85,12	90,10
		13,20	8,38	19,27	0,37	5,96	3,19	2454	3533	1775	85,00	120,70	111,00	200,00	81,66	90,10
4	101,60	16,10	10,54	23,67	0,42	6,01	3,24	3015	3533	1775	82,90	120,70	111,00	200,00	77,34	90,10

We draw your attention to the fact that technical characteristics are for reference only, and any person who uses this information should check its relevance, by contacting the technical department: techsales@tmk-group.com

Geometrical parameters of pipes with threaded connection TMK UP PF

Nominal pipe diameter	Pipe specific weight		Pipe wall thickness	Weight of plain-end pipes	Removed metal weight (both ends)	Coupling weight		Pipe cross-section area	Critical C/S area of special coupling	Critical C/S area of special coupling	Inside diameter of coupling	Outside diameter of coupling	Outside diameter of special coupling	Coupling length	Drift diameter	Length makeup loss
	lb/ft	mm				kg	mm									
4 1/2	114,30	11,60	6,35	16,91	0,54	5,82	4,62	2154	2743	2116	101,10	127,00	123,82	245,00	98,42	103,60
		11,60	6,35	16,91	0,54	5,82	4,62	2154	2743	2116	101,10	127,00	123,82	245,00	98,42	103,60
		12,60	6,88	18,23	0,54	7,75	4,79	2322	3780	2210	99,60	132,10	124,30	240,00	97,36	103,60
		13,50	7,37	19,44	0,54	5,94	4,74	2476	3780	2210	98,60	127,00	123,82	245,00	96,38	103,60
		13,50	7,37	19,44	0,54	5,94	4,74	2476	3780	2210	98,60	127,00	123,82	245,00	96,38	103,60
		15,20	8,56	22,32	0,55	7,81	4,85	2844	3780	2210	96,20	132,10	124,30	240,00	94,00	103,60
5	127,0	15,10	8,56	22,32	0,58	5,99	4,78	2844	2743	2116	96,20	127,00	123,82	245,00	94,00	103,60
		17,00	9,65	24,90	0,55	7,88	4,92	3173	3780	2210	94,00	132,10	124,30	240,00	91,82	103,60
		18,90	10,92	27,84	0,58	7,90	4,94	3547	3780	2210	93,30	132,10	124,30	240,00	89,28	103,60
		21,50	12,70	31,82	0,63	7,96	5,00	4054	3780	2210	91,60	132,10	124,30	240,00	85,72	103,60
		15,00	7,52	22,16	0,65	7,40	5,36	2823	3426	2383	111,10	141,30	136,52	250,00	108,78	106,70
		18,00	9,19	26,70	0,69	7,45	5,41	3401	3426	2383	110,10	141,30	136,52	250,00	105,44	106,70
5 1/2	139,7	21,40	11,10	31,73	0,77	7,54	5,49	4042	3426	2383	108,50	141,30	136,52	250,00	101,62	106,70
		23,20	12,14	34,39	0,78	7,64	5,59	4381	3426	2383	106,50	141,30	136,52	250,00	99,54	106,70
		24,10	12,70	35,90	0,79	7,69	5,64	4560	3426	2383	105,50	141,30	136,52	250,00	98,42	106,70
		15,50	6,98	22,85	0,75	8,51	6,31	2910	3701	2636	126,00	153,67	149,22	265,00	122,56	108,30
		17,00	7,72	25,13	0,76	8,63	6,42	3201	3701	2636	124,50	153,67	149,22	265,00	121,08	108,30
		20,00	9,17	29,52	0,76	8,83	6,63	3760	3701	2636	121,70	153,67	149,22	265,00	118,18	108,30
5 1/2	139,7	23,00	10,54	33,57	0,83	8,86	6,66	4277	3701	2636	121,30	153,67	149,22	265,00	115,44	108,30
		26,00	12,09	38,05	0,86	9,04	6,84	4847	3701	2636	118,40	153,67	149,22	265,00	112,34	108,30

Nominal pipe diameter	Pipe specific weight		Pipe wall thickness	Weight of plain-end pipes	Removed metal weight (both ends)	Coupling weight		Pipe cross-section area	Critical C/S area of special coupling	Critical C/S area of special coupling	Inside diameter of coupling	Outside diameter of coupling	Outside diameter of special coupling	Coupling length	Drift diameter	Length makeup loss
	lb/ft	kg/m				Regular	Special									
5 3/4	in	1614	24	0.8	1188	6.66	3058	5387	2858	130.4	166.0	156	265	128.87	108.3	
	mm	1768	7.0	0.8	1198	6.76	3347	5387	2858	130.4	166.0	156	265	127.47	108.3	
	lb/ft	1962	8.50	0.82	121	6.88	3673	5387	2858	128.8	166.0	156	265	125.87	108.3	
	kg/m	2151	9.50	0.82	12.6	7.02	4075	5387	2858	126.8	166.0	156	265	123.87	108.3	
6 5/8	in	2401	10.70	0.84	1242	7.2	4550	5387	2858	124.4	166.0	156	265	121.47	108.3	
	mm	2000	7.32	0.99	1420	8.06	3702	6082	3240	152.30	187.71	177.80	265.00	150.46	113.90	
	lb/ft	2125	8.00	0.99	14.32	8.18	4028	6082	3240	150.90	187.71	177.80	265.00	149.10	113.90	
	kg/m	2400	8.94	0.99	14.41	8.27	4475	6082	3240	149.90	187.71	177.80	265.00	147.22	113.90	
7	in	2800	10.59	1.08	1450	8.36	5246	6082	3240	148.90	187.71	177.80	265.00	143.92	113.90	
	mm	3200	12.06	1.20	1455	8.41	5919	6082	3240	148.30	187.71	177.80	265.00	140.98	113.90	
	lb/ft	2300	8.05	1.15	16.71	8.36	4293	7356	3493	160.90	200.03	187.32	275.00	158.52	118.70	
	kg/m	2600	9.19	1.19	16.79	8.44	4868	7356	3493	159.90	200.03	187.32	275.00	156.24	118.70	
7 5/8	in	2900	10.36	1.25	1686	8.52	5450	7356	3493	158.90	200.03	187.32	275.00	153.90	118.70	
	mm	3200	11.51	1.32	16.94	8.59	6013	7356	3493	157.90	200.03	187.32	275.00	151.60	118.70	
	lb/ft	3500	12.65	1.39	17.03	8.69	6563	7356	3493	156.70	200.03	187.32	275.00	149.32	118.70	
	kg/m	3800	13.72	1.39	17.21	8.86	7072	7356	3493	154.40	200.03	187.32	275.00	147.18	118.70	
7 3/4	in	4270	15.88	1.46	1751	9.16	8078	7356	3493	150.60	200.03	187.32	275.00	142.86	118.70	
	mm	4640	17.45	1.51	17.72	9.38	8791	7356	3493	147.80	200.03	187.32	275.00	139.72	118.70	
	lb/ft	2840	8.33	1.39	19.91	12.55	4851	8077	4919	176.30	215.90	206.38	297.00	173.84	124.90	
	kg/m	2970	9.52	1.44	20.01	12.65	5508	8077	4919	175.30	215.90	206.38	297.00	171.46	124.90	
7 5/8	in	3370	10.92	1.53	2012	12.76	6270	8077	4919	174.30	215.90	206.38	297.00	168.66	124.90	
	mm	3900	12.70	1.65	20.32	12.96	7221	8077	4919	172.40	215.90	206.38	297.00	165.10	124.90	
	lb/ft	4280	14.27	1.69	20.62	13.26	8043	8077	4919	169.50	215.90	206.38	297.00	161.96	124.90	
	kg/m	4530	15.11	1.71	20.79	13.43	8477	8077	4919	167.90	215.90	206.38	297.00	160.28	124.90	
7 3/4	in	5120	17.45	1.84	2240	19.30	9661	8077	4919	158.78	215.90	206.38	297.00	155.60	135.00	
	mm	5530	19.05	1.88	22.60	19.48	10451	8077	4919	155.58	215.90	212.09	297.00	152.40	135.00	
	lb/ft	196.85	4.61	1.82	23.11	-	8627	9043	-	170.9	221.5	-	297	163.45	124.8	
	kg/m	217.72	5.11	1.82	23.11	-	8627	9043	-	170.9	221.5	-	297	163.45	124.8	

We draw your attention to the fact that technical characteristics are for reference only, and any person who uses this information should check its relevance, by contacting the technical department: techsales@tmk-group.com

Geometrical parameters of pipes with threaded connection TMK UP PF

Nominal pipe diameter	Pipe specific weight		Pipe wall thickness	Weight of plain-end pipes	Removed metal weight (both ends)	Coupling weight		Pipe cross-section area	Critical C/S area of special coupling	Critical C/S area of special coupling	Inside diameter of coupling	Outside diameter of coupling	Outside diameter of special coupling	Coupling length	Drift diameter	Length makeup loss
	lb/ft	kg/m				Regular	Special									
8 5/8	in	3600	10.16	52.35	178	25.18	1410	6668	10366	5616	20150	24448	23178	297.00	198.02	128.00
	mm	4000	11.43	58.53	189	25.28	1421	7456	10366	5616	199.50	244.48	231.78	297.00	195.58	128.00
	lb/ft	4400	12.70	64.64	199	25.43	1436	8234	10366	5616	198.10	244.48	231.78	297.00	193.04	128.00
	kg/m	4900	14.15	71.51	203	25.72	1464	9110	10366	5616	195.40	244.48	231.78	297.00	190.50	128.00
9 5/8	in	3600	8.94	51.93	191	27.69	1544	6615	11510	6253	226.90	269.88	257.18	297.00	222.63	128.00
	mm	4000	10.03	57.99	198	27.80	1555	7388	11510	6253	225.90	269.88	257.18	297.00	220.45	128.00
	lb/ft	4300	11.05	63.61	206	27.91	1565	8103	11510	6253	224.90	269.88	257.18	297.00	218.41	128.00
	kg/m	4700	11.99	68.75	213	28.02	1576	8757	11510	6253	223.90	269.88	257.18	297.00	216.53	128.00
9 7/8	in	5350	13.84	78.72	229	28.27	1602	10028	11510	6253	216.00	269.88	257.18	297.00	212.83	128.00
	mm	5840	15.11	85.47	233	28.54	1628	10888	11510	6253	219.20	269.88	257.18	297.00	210.29	128.00
	lb/ft	6280	15.88	92.01	252	30.27	-	11721	12433	-	225.50	276.00	-	297.00	215.10	128.00
	kg/m	6640	16.79	96.91	255	30.48	-	12345	12433	-	224.60	276.00	-	297.00	213.28	128.00
10 3/4	in	7210	18.29	104.89	260	30.83	-	13362	12433	-	223.10	276.00	-	297.00	210.28	128.00
	mm	4050	8.89	57.91	213	30.70	1711	7378	12795	6968	255.40	298.45	285.75	297.00	251.30	129.00
	lb/ft	4550	10.16	65.87	223	30.81	1723	8391	12795	6968	254.40	298.45	285.75	297.00	248.76	129.00
	kg/m	5100	11.43	73.75	237	30.93	1735	9394	12795	6968	253.40	298.45	285.75	297.00	246.22	129.00
10 3/4	in	5550	12.57	80.75	255	30.89	1731	10286	12795	6968	253.80	298.45	285.75	297.00	243.94	129.00
	mm	6070	13.84	88.47	256	31.02	1744	11270	12795	6968	252.80	298.45	285.75	297.00	241.40	129.00
	lb/ft	6570	15.11	96.12	264	31.57	1799	12244	12795	6968	248.00	298.45	285.75	297.00	238.86	129.00
	kg/m	7320	17.07	107.76	272	32.02	1843	13727	12795	6968	244.30	298.45	285.75	297.00	234.94	129.00

We draw your attention to the fact that technical characteristics are for reference only, and any person who uses this information should check its relevance, by contacting the technical department: techsales@tmk-group.com

Nominal pipe diameter	Pipe specific weight	Pipe wall thickness	Weight of plain-end pipes	Removed metal weight (both ends)	Coupling weight		Pipe cross-section area	Critical C/S area of coupling	Critical C/S area of special coupling	Inside diameter of coupling	Outside diameter of coupling	Outside diameter of special coupling	Coupling length	Drift diameter	Length makeup loss
					Regular	Special									
11 3/4	42	8,46	6,05	2,28	33,35	-	7,707	13941	-	281	323,85	-	297	277,56	129
	47	9,52	6,83	2,33	33,51	-	8,641	13941	-	279,7	323,85	-	297	275,44	129
11 3/4	54	11,05	7,8,32	2,45	33,72	-	9,977	13941	-	278,1	323,85	-	297	272,38	129
	60	12,42	8,761	2,61	33,88	-	11,160	13941	-	276,9	323,85	-	297	269,64	129
11 7/8	65	13,56	9,527	2,76	34,02	-	12,136	13941	-	275,8	323,85	-	297	267,36	129
	71	14,78	10,34	2,92	34,19	-	13,172	13941	-	274,5	323,85	-	297	264,92	129
13 3/8	67,9	13,97	9,91	2,86	33,54	-	12,625	13813	-	278,7	326,25	-	297	269,72	129
	71,8	14,78	10,456	2,97	33,66	-	13,319	13813	-	277,8	326,25	-	297	268,1	129
13 3/8	50,89	9,5	7,365	2,62	38,45	-	9,382	16048	-	306,2	351	-	297	300,88	129
	58,78	11	8,487	2,83	38,59	-	10,811	16048	-	305,2	351	-	297	297,88	129
13 3/4	65,13	12,4	9,524	2,95	38,88	-	12,133	16048	-	303,2	351	-	297	295,08	129
	72,87	14	10,698	3,17	39,13	-	13,628	16048	-	301,4	351	-	297	291,88	129
13 3/8	54,5	9,65	7,855	2,77	37,93	-	10,007	15795	-	322	365,12	-	297	316,45	129
	61	10,92	8,855	2,93	38,08	-	11,280	15795	-	321	365,12	-	297	313,91	129
13 3/8	68	12,19	9,846	3,14	38,23	-	12,543	15795	-	320	365,12	-	297	311,37	129
	72	13,06	10,521	3,04	38,69	-	13,403	15795	-	319,1	365,12	-	297	309,63	129
13 3/4	77	14	11,246	3,07	38,98	-	14,326	15795	-	315,1	365,12	-	297	307,75	129
	85	15,4	12,317	3,21	39,29	-	15,691	15795	-	313,1	365,12	-	297	304,95	129
13 5/8	79,1	14,10	11,544	3,24	39,85	-	14,706	14706	-	322,3	371,7	-	297	313,12	129
	88,2	15,88	12,931	3,33	40,38	-	16,473	16680	-	318,9	371,7	-	297	309,56	129
13 5/8	105,1	19,30	15,54	3,55	41,39	-	19,814	16680	-	312,5	371,7	-	297	302,72	129

We draw your attention to the fact that technical characteristics are for reference only, and any person who uses this information should check its relevance, by contacting the technical department: techsales@tmk-group.com

Strength characteristics of pipes with TMK UP PF threaded connection

Nominal pipe diameter	Pipe specific weight	Pipe wall thickness	Yield Strength in Tension, kN												Minimum Internal Yield Pressure, MPa												Collapse Pressure, MPa											
			Minimum yield strength MPa/ksi												Minimum yield strength MPa/ksi												Minimum yield strength MPa/ksi											
			37,9	55,2	62,1	65,5	75,8	86,2	93,1	96,6	103,5	37,9	55,2	62,1	65,5	75,8	86,2	93,1	96,6	103,5	37,9	55,2	62,1	65,5	75,8	86,2	93,1	96,6	103,5									
in	mm	mm	55	80	90	95	110	125	135	140	150	155	80	90	95	110	125	135	140	150	155	80	90	95	110	125	135	140	150									
			4,60	4,83	3,19	4,65	5,23	5,52	6,38	7,26	7,84	8,13	8,71	5,31	7,74	8,70	9,18	10,62	12,08	13,05	13,54	14,50	55,9	8,13	9,15	9,66	11,15	12,7	13,15	13,54	14,28							
2 3/8	60,32	6,60	6,78	7,15	8,27	9,41	10,16	10,54	11,30	7,09	10,33	11,62	12,26	14,18	16,13	17,42	18,09	19,37	72,5	105,4	118,6	125,2	145,0	164,7	177,9	184,5	197,7											
			6,60	7,49	4,71	6,86	7,72	8,14	9,42	10,72	11,57	12,01	12,87	8,24	11,99	13,49	14,2	16,47	18,73	20,23	20,99	22,49	82,5	120,1	135,1	142,6	165,1	187,6	202,6	210,1	225,1							
2 7/8	73,02	7,95	8,53	4,98	7,25	8,15	8,60	9,95	13,2	12,23	12,68	13,59	9,38	13,66	15,37	16,21	18,78	21,33	23,04	23,91	25,61	92,2	134,0	150,8	159,2	184,3	208,4	226,2	234,6	251,3								
			6,40	5,51	4,43	6,45	7,26	7,65	8,86	10,07	10,88	11,29	12,10	5,00	7,29	8,20	8,65	10,01	11,38	12,29	12,76	13,67	53,0	77,0	85,4	89,2	100,3	110,8	117,5	120,7	126,9							
3 1/2	88,90	11,50	11,18	7,80	10,89	12,25	12,92	14,96	17,01	18,37	19,06	20,42	9,05	13,18	14,82	15,63	18,09	20,58	22,22	23,06	24,71	89,4	130,0	146,3	154,4	178,9	203,2	219,5	227,6	243,8								
			11,50	11,18	7,80	10,89	12,25	12,92	14,96	17,01	18,37	19,06	20,42	9,05	13,18	14,82	15,63	18,09	20,58	22,22	23,06	24,71	89,4	130,0	146,3	154,4	178,9	203,2	219,5	227,6	243,8							
4	101,60	13,20	8,38	9,30	13,55	15,24	16,07	18,60	21,15	22,85	23,71	25,40	54,7	79,7	89,6	94,5	109,4	124,4	134,4	139,4	149,4	57,4	83,5	94,0	99,2	114,9	130,4	138,9	143,0	151,1								
			16,10	10,54	11,43	16,64	18,72	19,75	22,86	25,99	28,07	29,13	31,21	68,8	100,2	112,7	118,9	137,6	156,5	169,0	175,4	187,9	70,6	102,6	115,5	121,9	141,1	160,4	173,2	179,6	192,5							

Strength characteristics of pipes with TMK UP PF threaded connection

Nominal pipe diameter	Pipe specific weight	Yield Strength in Tension, kN															Minimum Internal Yield Pressure, kN															Collapse Pressure, Mpa														
		Minimum yield strength Mpa/ksi															Minimum yield strength Mpa/ksi															Minimum yield strength Mpa/ksi														
		379	552	621	655	758	862	931	966	1035	379	552	621	655	758	862	931	966	1035	379	552	621	655	758	862	931	966	1035																		
4 1/2	in	mm	55	80	90	95	110	125	135	140	150	150	155	80	90	95	110	125	135	140	150	150	155	80	90	95	110	125	135	140	150															
		lb/ft	11.60	11.89	13.37	14.11	16.32	18.56	20.05	20.80	22.29	36.8	53.7	60.4	63.7	73.7	83.8	90.5	93.9	100.6	34.2	43.8	47.0	48.4	52.3	55.2	56.7	57.3	58.1	58.1																
		tubing	11.6	11.89	13.37	14.11	16.32	18.56	20.03	20.80	22.29	36.8	53.7	60.4	63.7	73.7	83.8	90.5	93.9	100.6	34.2	43.8	47.0	48.4	52.3	55.2	56.7	57.3	58.1	58.1																
		tubing	12.60	12.82	14.42	15.21	17.60	20.01	21.62	22.43	24.03	39.9	58.1	65.4	69.0	79.8	90.8	98.1	101.8	109.0	39.5	51.7	56.0	58.0	63.5	68.2	70.8	72.0	74.1	74.1																
		tubing	13.50	13.67	15.37	16.22	18.77	21.34	23.05	23.92	25.62	42.8	62.3	70.1	73.9	85.5	97.3	105.1	109.0	116.8	44.3	59.0	64.2	66.7	73.8	80.1	83.9	85.7	88.9	88.9																
		tubing	13.5	13.67	15.37	16.22	18.77	21.34	23.03	23.92	25.62	42.8	62.3	70.1	73.9	85.5	97.3	105.1	109.0	116.8	44.3	59.0	64.2	66.7	73.8	80.1	83.9	85.7	88.9	88.9																
		tubing	15.20	15.70	17.66	18.63	21.55	24.51	26.47	27.47	29.43	49.7	72.3	81.4	85.8	99.3	113.0	122.0	126.6	135.6	52.6	76.5	84.3	88.1	98.9	109.2	115.7	118.9	124.9	124.9																
		tubing	15.00	15.40	17.03	17.97	20.79	23.64	25.60	26.50	28.39	49.7	72.3	81.4	85.8	99.3	113.0	122.0	126.6	135.6	52.6	76.5	84.3	88.1	98.9	109.2	115.7	118.9	124.9	124.9																
		tubing	17.00	17.51	19.70	20.78	24.05	27.35	29.54	30.65	32.84	56.0	81.6	91.8	96.8	112.0	127.4	137.6	142.7	152.9	58.7	85.3	96.0	101.3	117.3	133.3	144.0	149.2	157.8	157.8																
		tubing	18.90	19.58	22.02	23.23	26.88	30.57	33.02	34.26	36.71	63.4	92.3	103.8	109.5	126.7	144.1	155.7	161.5	173.0	65.6	95.4	107.3	113.3	131.2	149.1	161.0	166.9	178.9	178.9																
tubing	21.50	20.87	23.47	24.76	28.65	32.58	35.19	36.51	39.12	73.7	107.3	120.8	127.4	147.4	167.6	181.0	187.8	201.3	75.0	109.0	122.7	129.5	149.9	170.4	184.0	190.8	204.4	204.4																		
5	in	mm	15.00	1070	1558	1753	1849	2140	2433	2628	2727	2921	3933	572	643	679	785	893	965	1001	1072	384	500	541	560	611	654	678	689	707																
		lb/ft	18.00	12.89	18.78	21.12	22.28	25.78	29.32	31.67	32.86	35.20	48.0	69.9	78.6	82.9	96.0	109.2	117.9	122.3	131.1	50.9	72.3	79.4	82.9	92.8	102.2	108.0	110.8	116.2																
		tubing	21.40	11.0	12.98	18.91	21.28	22.44	25.97	29.53	31.90	35.46	58.0	84.4	95.0	100.2	115.9	131.8	142.4	147.8	158.3	60.5	88.1	99.1	104.6	121.1	137.6	148.6	154.1	165.1																
		tubing	23.20	12.14	12.98	18.91	21.28	22.44	25.97	29.53	31.90	35.46	63.4	92.3	103.9	109.6	126.8	144.2	155.7	161.6	173.1	65.6	95.4	107.4	113.3	131.2	149.1	161.0	167.0	179.0																
		tubing	24.10	12.70	12.98	18.91	21.28	22.44	25.97	29.53	31.90	35.46	66.3	96.6	108.7	114.6	132.7	150.9	162.9	169.1	181.1	68.3	99.4	111.8	118.0	136.6	155.3	167.7	175.9	186.3																
		tubing	15.50	6.98	11.03	16.07	19.88	20.97	24.26	27.59	29.80	30.92	33.12	33.1	48.3	54.3	57.3	66.3	75.4	81.4	84.5	90.5	27.9	34.4	36.2	37.0	38.8	40.5	41.9	42.5	43.5															
		tubing	17.00	7.72	12.13	17.67	19.88	20.97	24.26	27.59	29.80	30.92	33.12	36.7	53.4	60.1	63.3	73.3	83.4	90.0	93.4	100.1	33.9	43.3	46.4	47.9	51.5	54.4	55.8	56.3	57.1															
		tubing	20.00	9.17	14.03	20.43	22.98	24.24	28.05	31.90	34.46	35.75	38.31	43.5	63.4	71.3	75.2	87.1	99.0	106.9	111.0	118.9	45.6	60.9	66.5	69.1	76.6	83.4	87.5	89.4	92.9															
		tubing	23.00	10.54	14.03	20.43	22.98	24.24	28.05	31.90	34.46	35.75	38.31	50.0	72.9	82.0	86.5	100.1	113.8	122.9	127.5	136.7	52.9	77.0	85.4	89.2	100.3	110.8	117.4	120.6	126.8															
		tubing	26.00	12.09	14.03	20.43	22.98	24.24	28.05	31.90	34.46	35.75	38.31	57.4	83.6	94.1	99.2	114.8	130.5	141.0	146.3	156.8	59.9	87.3	96.2	103.6	114.8	136.4	147.2	152.7	163.6															
tubing	16.14	7.00	11.59	16.88	18.99	20.03	23.18	26.36	29.47	29.54	31.65	31.8	46.3	52.1	54.9	63.6	72.3	78.1	81	86.8	25.5	30.9	32.3	32.8	34.8	36.8	37.9	38.3	38.9																	
tubing	17.68	7.70	12.68	18.47	20.78	21.92	25.37	28.85	31.16	32.33	34.64	35	50.9	57.3	60.4	69.9	79.5	85.9	89.1	95.5	31	39	41.5	42.7	45.4	47.3	48	48.2	49.7																	
tubing	19.62	8.50	13.92	20.28	22.81	24.06	27.84	31.66	34.20	35.48	38.02	38.6	56.2	63.2	66.7	77.2	87.8	94.8	98.4	105.4	32.1	53.9	58.6	62.6	64.7	65.7	67.2	67.2	67.2																	
tubing	21.51	9.50	15.45	22.50	25.31	26.69	30.89	35.13	37.94	39.37	42.18	43.1	62.8	70.7	74.6	86.3	98.1	106	110	117.8	45	59.9	65.3	67.9	75.2	81.7	85.7	87.5	90.9																	
tubing	24.01	10.70	17.24	25.11	28.25	29.80	34.49	39.22	42.36	43.95	47.09	48.6	70.8	79.6	84	97.2	110.5	119.4	123.9	132.7	51.5	73.9	81.2	84.7	95	104.7	110.7	115.7	119.3																	

Strength characteristics of pipes with TMK UP PF threaded connection

Nominal pipe diameter	Pipe specific weight	Yield Strength in Tension, kN															Minimum Internal Yield Pressure, kN															Collapse Pressure, Mpa														
		Minimum yield strength Mpa/ksi															Minimum yield strength Mpa/ksi															Minimum yield strength Mpa/ksi														
		379	552	621	655	758	862	931	966	1035	379	552	621	655	758	862	931	966	1035	379	552	621	655	758	862	931	966	1035																		
6 5/8	in	mm	55	80	90	95	110	125	135	140	150	150	155	80	90	95	110	125	135	140	150	150	155	80	90	95	110	125	135	140	150															
		lb/ft	20.00	14.03	20.43	22.99	24.24	28.06	31.91	34.46	35.76	38.31	28.9	42.0	47.3	49.9	57.7	65.6	70.9	73.5	78.8	20.9	25.5	26.2	27.8	28.8	29.1	29.2	29.3	29.3																
		tubing	21.25	8.00	15.27	22.24	25.02	26.39	30.53	34.72	37.50	38.91	46.9	31.5	45.9	51.7	54.5	63.1	71.7	77.5	80.4	86.1	25.1	30.2	31.6	32.0	34.2	36.1	37.1	37.5	38.1															
		tubing	24.00	8.94	16.96	24.70	27.79	29.31	33.92	38.58	41.66	43.23	46.32	35.2	51.3	57.7	60.9	70.5	80.1	86.6	89.8	96.2	31.4	39.7	42.3	43.5	46.4	48.4	49.3	49.5	50.6															
		tubing	28.00	10.59	19.88	28.96	32.58	34.36	39.77	45.22	48.84	50.68	54.30	41.7	60.8	68.4	72.1	83.5	94.9	102.5	106.4	114.0	42.6	56.3	61.2	63.6	70.1	75.8	79.2	80.8	83.6															
		tubing	32.00	12.06	22.43	32.67	36.76	38.77	44.86	51.02	55.10	57.18	61.26	47.5	69.2	77.9	82.1	95.1	108.1	116.8	121.2	129.8	50.5	71.1	78.1	81.5	91.2	100.2	105.9	108.6	113.8															
		tubing	23.00	8.05	16.27	23.70	26.66	28.12	32.54	37.01	39.97	41.47	44.43	30.0	43.7	49.2	51.9	60.1	68.3	73.8	76.5	82.0	22.5	26.4	27.8	28.6	30.6	32.0	32.6	32.8	33.0															
		tubing	26.00	9.19	18.45	26.87	30.23	31.89	36.90	41.96	45.32	47.02	50.38	34.3	49.9	56.2	59.2	68.6	78.0	84.2	87.4	93.6	29.8	37.3	39.6	40.5	42.9	44.4	45.4	46.1	47.4															
		tubing	29.00	10.36	20.65	30.08	33.84	35.70	41.31	46.98	50.74	52.64	56.40	36.6	56.3	63.3	66.8	77.3	87.9	94.9	98.5	105.5	37.3	48.4	52.2	54.0	58.8	62.8	65.0	65.9	67.5															
		tubing	32.00	11.51	22.79	33.19	37.34	39.39	45.58	51.83	55.98	58.09	62.23	42.9	62.5	70.4	74.2	85.9	97.7	105.5	109.4	117.3	44.8	59.4	64.7	67.6	74.4	81.3	85.2	87.0	90.4															
tubing	35.00	12.65	24.87	36.23	40.76	42.99	49.75	56.58	61.0	63.40	67.93	47.2	68.7	77.3	81.6	94.4	107.3	115.9	120.3	128.9	50.2	70.3	77.1	80.4	89.9	98.8	104.3	106.9	112.0																	
tubing	38.00	13.72	26.80	39.04	43.92	46.32	53.61	60.96	65.84	68.32	73.20	51.2	74.5	83.9	88.5	102.4	116.4	125.7	130.4	139.8	54.0	78.6	88.4	92.7	104.4	115.6	122.7	126.1	132.7																	
tubing	42.70	15.88	27.88	40.61	45.68	48.18	55.76	63.41	68.48	71.06	76.3	59.2	86.3	97.1	102.4	118.5	134.7	145.5	151.0	161.8	61.7	89.8	101.0	106.6	123.5	140.3	151.5	157.1	166.4																	
tubing	46.40	17.45	27.88	40.61	45.68	48.18	55.76	63.41	68.48	71.06	76.3	65.1	94.8																																	

TMK UP PF
Strength characteristics of pipes with TMK UP PF threaded connection

Nominal pipe diameter	Pipe specific weight	Pipe wall thickness	Yield Strength in Tension, kN		Minimum Internal Yield Pressure, kN		Collapse Pressure, Mpa																			
			Minimum yield strength Mpa/Ksi	Minimum yield strength Mpa/Ksi	Minimum yield strength Mpa/Ksi	Minimum yield strength Mpa/Ksi	Minimum yield strength Mpa/Ksi	Minimum yield strength Mpa/Ksi																		
in	mm	mm	379	552	621	655	758	862	931	966	1035	1035														
			55	80	90	95	110	125	135	140	150	150	150													
			2237	3258	3665	3866	4474	5087	5495	5701	6109	271	394	44.3	46.8	54.1	61.6	66.5	69.0	73.9	17.5	21.0	22.2	22.6	23.6	23.7
8 5/8	219.08	mm	379	552	621	655	758	862	931	966	1035	1035														
			55	80	90	95	110	125	135	140	150	150	150													
			2237	3258	3665	3866	4474	5087	5495	5701	6109	271	394	44.3	46.8	54.1	61.6	66.5	69.0	73.9	17.5	21.0	22.2	22.6	23.6	23.7
9 5/8	244.48	mm	379	552	621	655	758	862	931	966	1035	1035														
			55	80	90	95	110	125	135	140	150	150	150													
			2237	3258	3665	3866	4474	5087	5495	5701	6109	271	394	44.3	46.8	54.1	61.6	66.5	69.0	73.9	17.5	21.0	22.2	22.6	23.6	23.7
10 3/4	273.05	mm	379	552	621	655	758	862	931	966	1035	1035														
			55	80	90	95	110	125	135	140	150	150	150													
			2237	3258	3665	3866	4474	5087	5495	5701	6109	271	394	44.3	46.8	54.1	61.6	66.5	69.0	73.9	17.5	21.0	22.2	22.6	23.6	23.7
9 7/8	250.83	mm	379	552	621	655	758	862	931	966	1035	1035														
			55	80	90	95	110	125	135	140	150	150	150													
			2237	3258	3665	3866	4474	5087	5495	5701	6109	271	394	44.3	46.8	54.1	61.6	66.5	69.0	73.9	17.5	21.0	22.2	22.6	23.6	23.7
11 3/4	298.45	mm	379	552	621	655	758	862	931	966	1035	1035														
			55	80	90	95	110	125	135	140	150	150	150													
			2237	3258	3665	3866	4474	5087	5495	5701	6109	271	394	44.3	46.8	54.1	61.6	66.5	69.0	73.9	17.5	21.0	22.2	22.6	23.6	23.7
13 3/8	339.72	mm	379	552	621	655	758	862	931	966	1035	1035														
			55	80	90	95	110	125	135	140	150	150	150													
			2237	3258	3665	3866	4474	5087	5495	5701	6109	271	394	44.3	46.8	54.1	61.6	66.5	69.0	73.9	17.5	21.0	22.2	22.6	23.6	23.7
13 5/8	346.08	mm	379	552	621	655	758	862	931	966	1035	1035														
			55	80	90	95	110	125	135	140	150	150	150													
			2237	3258	3665	3866	4474	5087	5495	5701	6109	271	394	44.3	46.8	54.1	61.6	66.5	69.0	73.9	17.5	21.0	22.2	22.6	23.6	23.7

We draw your attention to the fact that technical characteristics are for reference only, and any person who uses this information should check its relevance, by contacting the technical department: techsales@tmk-group.com


Strength characteristics of pipes with TMK UP PF threaded connection

Nominal pipe diameter	Pipe specific weight	Pipe wall thickness	Yield Strength in Tension, kN		Minimum Internal Yield Pressure, kN		Collapse Pressure, Mpa																			
			Minimum yield strength Mpa/Ksi	Minimum yield strength Mpa/Ksi	Minimum yield strength Mpa/Ksi	Minimum yield strength Mpa/Ksi	Minimum yield strength Mpa/Ksi	Minimum yield strength Mpa/Ksi																		
in	mm	mm	379	552	621	655	758	862	931	966	1035	1035														
			55	80	90	95	110	125	135	140	150	150	150													
			2921	4254	4786	5048	5842	6644	7176	7445	7977	18.8	27.4	30.8	32.5	37.6	42.8	46.2	47.9	51.3	7.7	7.8	7.9	8.0	8.1	8.2
11 3/4	298.45	mm	379	552	621	655	758	862	931	966	1035	1035														
			55	80	90	95	110	125	135	140	150	150	150													
			2921	4254	4786	5048	5842	6644	7176	7445	7977	18.8	27.4	30.8	32.5	37.6	42.8	46.2	47.9	51.3	7.7	7.8	7.9	8.0	8.1	8.2
11 7/8	301.63	mm	379	552	621	655	758	862	931	966	1035	1035														
			55	80	90	95	110	125	135	140	150	150	150													
			2921	4254	4786	5048	5842	6644	7176	7445	7977	18.8	27.4	30.8	32.5	37.6	42.8	46.2	47.9	51.3	7.7	7.8	7.9	8.0	8.1	8.2
12 3/4	323.85	mm	379	552	621	655	758	862	931	966	1035	1035														
			55	80	90	95	110	125	135	140	150	150	150													
			2921	4254	4786	5048	5842	6644	7176	7445	7977	18.8	27.4	30.8	32.5	37.6	42.8	46.2	47.9	51.3	7.7	7.8	7.9	8.0	8.1	8.2
13 3/8	339.72	mm	379	552	621	655	758	862	931	966	1035	1035														
			55	80	90	95	110	125	135	140	150	150	150													
			2921	4254	4786	5048	5842	6644	7176	7445	7977	18.8	27.4	30.8	32.5	37.6	42.8	46.2	47.9	51.3	7.7	7.8	7.9	8.0	8.1	8.2
13 5/8	346.08	mm	379	552	621	655	758	862	931	966	1035	1035														
			55	80	90	95	110	125	135	140	150	150	150													
			2921	4254	4786	5048	5842	6644	7176	7445	7977	18.8	27.4	30.8	32.5	37.6	42.8	46.2	47.9	51.3	7.7	7.8	7.9	8.0	8.1	8.2

We draw your attention to the fact that technical characteristics are for reference only, and any person who uses this information should check its relevance, by contacting the technical department: techsales@tmk-group.com


PRO SERIES / TMK UP™

PF ET

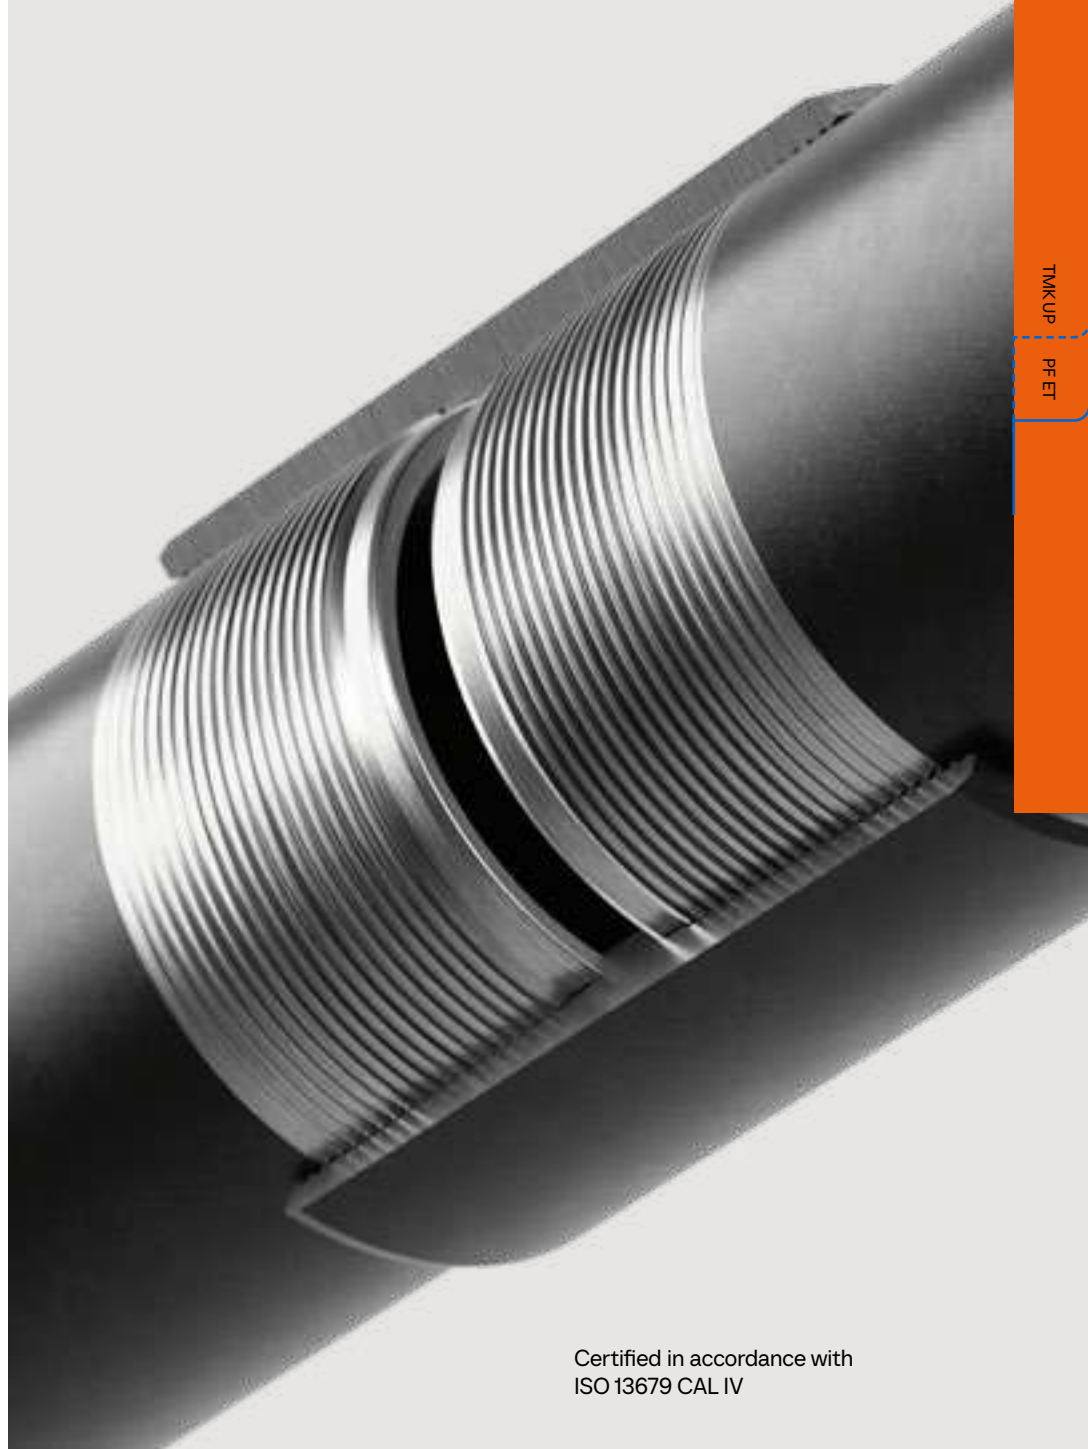

TMK UP

PF ET

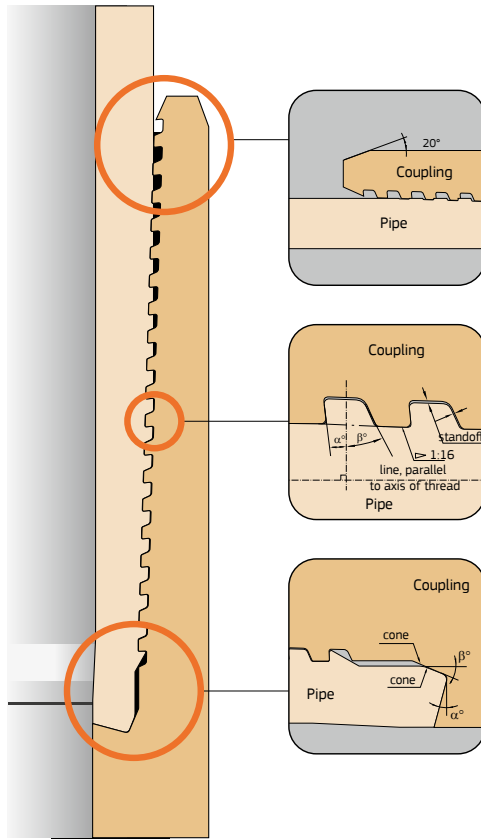

TMK UP PF ET for Casing

TMK UP PF ET is a modified TMK UP PF with a larger thread. It has an increased torque (up to 30% related to TMK UP PF) that allows to use the connection while rotating the pipe string during running, cementing, and drilling while casing. TMK UP PF ET provides high gas tightness under particularly difficult operating conditions (extreme bending, compressive, tensile loads, torque, aggressive environment). Qualified to ISO 13679 CAL IV.

Range: 4-1/2"–13-5/8" / 114.3–346.08 mm


Unique Feature:

- 80%** compression efficiency
- 100%** tension efficiency
- Gas-tight metal-to-metal seal
- Over-torque protection during make-up
- Hooked thread profile
- Reduced cross threading
- Robust galling resistance

Application:

- Horizontal and ERD wells
- Gas and oil wells
- RIH with rotation
- Cementing with rotation
- Casing while Drilling (CwD)
- Complicated well trajectory

TMK UP PF ET Performance Envelope

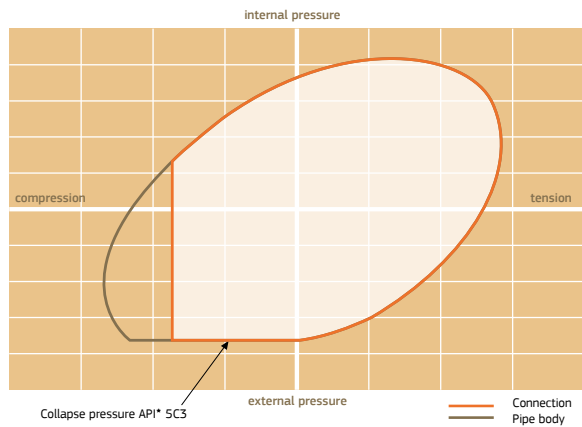

Nominal pipe diameter	Pipe specific weight	Pipe wall thickness	Weight of plain-end pipes	Removed metal weight (both ends)	Coupling weight		Pipe cross-section area	Critical C/S area of coupling	Critical C/S area of special coupling	Inside diameter of coupling	Outside diameter of coupling	Outside diameter of special coupling	Coupling length	Drift diameter	Length makeup loss
					Regular	Special									
4 1/2	1160	6,35	16,91	0,54	5,82	4,62	2 154	2743	2112	100,10	127,00	123,82	245,00	98,42	103,60
	1350	7,37	19,44	0,54	5,97	4,76	2 476	2743	2112	98,10	127,00	123,82	245,00	96,38	103,60
	1510	8,56	22,32	0,55	6,08	4,87	2 844	3760	2210	95,70	127,00	123,82	245,00	94,00	103,60
5	1500	7,52	22,16	0,65	7,44	5,39	2 823	3426	2378	110,50	141,30	136,52	250,00	108,78	106,70
	1800	9,19	26,70	0,66	7,61	5,56	3 401	3426	2378	107,10	141,30	136,52	250,00	105,44	106,70
	2140	11,10	31,73	0,67	7,81	5,76	4 042	3426	2378	103,30	141,30	136,52	250,00	101,62	106,70
5 1/2	2320	12,14	34,39	0,68	7,91	5,86	4 381	3426	2378	101,20	141,30	136,52	250,00	99,54	106,70
	2410	12,70	35,80	0,69	7,97	5,92	4 560	3426	2378	100,10	141,30	136,52	250,00	98,42	106,70
	1550	6,98	22,85	0,74	8,64	6,44	2 910	3701	2631	124,20	153,67	149,22	265,00	122,56	108,30
6 5/8	1700	7,72	25,13	0,74	8,75	6,55	3 201	3701	2631	122,80	153,67	149,22	265,00	121,08	108,30
	2000	9,17	29,52	0,75	8,97	6,77	3 760	3701	2631	119,90	153,67	149,22	265,00	118,18	108,30
	2300	10,54	33,57	0,76	9,17	6,97	4 277	3701	2631	117,10	153,67	149,22	265,00	115,44	108,30
6 5/8	2600	12,09	38,05	0,78	9,4	7,20	4 847	3701	2631	114,00	153,67	149,22	265,00	112,34	108,30
	2000	7,32	29,06	0,99	14,22	8,08	3 702	6082	3240	151,90	187,71	177,80	265,00	150,46	113,90
	2125	8,00	31,62	0,99	14,35	8,21	4 028	6082	3240	150,60	187,71	177,80	265,00	149,10	113,90
7	2400	8,94	35,13	1	14,52	8,38	4 475	6082	3240	148,70	187,71	177,80	265,00	147,22	113,90
	2800	10,59	41,18	1,02	14,82	8,67	5 246	6082	3240	145,40	187,71	177,80	265,00	143,92	113,90
	3200	12,06	46,46	1,04	15,08	8,94	5 919	6082	3240	142,50	187,71	177,80	265,00	140,98	113,90

We draw your attention to the fact that technical characteristics are for reference only, and any person who uses this information should check its relevance, by contacting the technical department: techsales@tmk-group.com

Geometric parameters of pipes with threaded connection TMK UP PF ET

Nominal pipe diameter	Pipe specific weight	Pipe wall thickness	Weight of plain-end pipes	Removed metal weight (both ends)	Coupling weight		Pipe cross-section area	Critical C/S area of coupling	Critical C/S area of special coupling	Inside diameter of coupling	Outside diameter of coupling	Outside diameter of special coupling	Coupling length	Drift diameter	Length makeup loss
					Regular	Special									
7	2000	6,91	29,12	1,15	16,6	8,26	3 710	7366	3493	162,30	200,03	187,32	275,00	160,80	118,70
	2300	8,05	33,70	1,16	16,78	8,43	4 293	7366	3493	160,00	200,03	187,32	275,00	158,52	118,70
	2600	9,19	38,21	1,17	16,95	8,61	4 868	7366	3493	157,70	200,03	187,32	275,00	156,24	118,70
7 5/8	2900	10,36	42,78	1,18	17,14	8,79	5 450	7366	3493	155,40	200,03	187,32	275,00	153,90	118,70
	3200	11,51	47,20	1,19	17,31	8,97	6 013	7366	3493	153,10	200,03	187,32	275,00	151,60	118,70
	3500	12,65	51,52	1,21	17,49	9,14	6 563	7366	3493	150,80	200,03	187,32	275,00	149,32	118,70
8 5/8	2400	7,62	34,96	1,38	19,88	12,52	4 454	8077	4919	176,50	215,90	206,38	297,00	175,26	124,90
	2640	8,33	38,08	1,39	20,03	12,67	4 851	8077	4919	175,10	215,90	206,38	297,00	173,84	124,90
	2970	9,52	43,24	1,4	20,28	12,92	5 508	8077	4919	172,70	215,90	206,38	297,00	171,46	124,90
8 5/8	3370	10,92	49,22	1,42	20,58	13,22	6 270	8077	4919	169,90	215,90	206,38	297,00	168,66	124,90
	3900	12,70	56,68	1,45	20,95	13,59	7 221	8077	4919	166,40	215,90	206,38	297,00	165,10	124,90
	4280	14,27	63,14	1,48	21,28	13,92	8 043	8077	4919	163,20	215,90	206,38	297,00	161,96	124,90
8 5/8	4530	15,11	66,54	1,5	21,46	14,10	8 477	8077	4919	161,60	215,90	206,38	297,00	160,28	124,90
	2800	7,72	40,24	1,67	25,05	13,97	5 126	10366	5616	201,70	244,48	231,78	297,00	200,46	128,00
	3200	8,94	46,33	1,68	25,3	14,23	5 902	10366	5616	199,30	244,48	231,78	297,00	198,02	128,00
8 5/8	3600	10,16	52,35	1,69	25,56	14,49	6 668	10366	5616	196,90	244,48	231,78	297,00	195,58	128,00
	4000	11,43	58,53	1,71	25,83	14,75	7 456	10366	5616	194,30	244,48	231,78	297,00	193,04	128,00
	4400	12,70	64,64	1,74	26,1	15,02	8 234	10366	5616	191,80	244,48	231,78	297,00	190,50	128,00
4900	14,15	71,51	1,77	26,41	15,33	9 110	10366	5616	188,90	244,48	231,78	297,00	187,60	128,00	

We draw your attention to the fact that technical characteristics are for reference only, and any person who uses this information should check its relevance, by contacting the technical department: techsales@tmk-group.com

Nominal pipe diameter	Pipe specific weight	Pipe wall thickness	Weight of plain-end pipes	Removed metal weight (both ends)		Coupling weight		Pipe cross-section area	Critical C/S area of coupling	Critical C/S area of special coupling	Inside diameter of coupling	Outside diameter of coupling	Outside diameter of special coupling	Coupling length	Drift diameter	Length makeup loss
				kg	kg	kg	kg									
9 5/8	36,00	8,94	51,93	1,87	15,68	27,93	15,68	6 815	1150	6253	224,70	269,88	257,18	297,00	222,63	128,00
	40,00	10,03	57,99	1,89	28,17	15,92	7 388	8 103	1150	6253	222,50	269,88	257,18	297,00	220,45	128,00
	43,50	11,05	63,61	1,91	28,4	16,14	8 103	8 757	1150	6253	220,50	269,88	257,18	297,00	216,41	128,00
	47,00	11,99	68,75	1,93	28,61	16,35	8 757	10 028	1150	6253	218,60	269,88	257,18	297,00	216,53	128,00
	53,50	13,84	78,72	1,97	29,02	16,76	10 028	10 888	1150	6253	214,90	269,88	257,18	297,00	212,83	128,00
	58,40	15,11	85,47	2	29,31	17,05	10 888	11 130	1150	6253	212,40	269,88	257,18	297,00	210,29	128,00
	59,40	15,47	87,37	2,02	29,39	17,13	11 130	12 195	1150	6253	211,60	269,88	257,18	297,00	209,57	128,00
	64,90	17,07	95,73	2,07	29,75	17,49	12 195	13 225	1150	6253	208,40	269,88	257,18	297,00	206,37	128,00
	70,30	18,64	103,82	2,13	30,11	17,85	13 225	14 258	1150	6253	205,30	269,88	257,18	297,00	203,23	128,00
	75,60	20,24	111,93	2,19	30,47	18,21	14 258	11 721	12433	6968	202,10	269,88	257,18	297,00	200,03	128,00
9 7/8	62,80	15,88	92,01	2,53	30,44	-	12 345	12433	-	215,40	276,00	-	297,00	215,10	128,00	
	66,40	16,79	96,91	2,57	30,65	-	12 345	12433	-	215,40	276,00	-	297,00	213,28	128,00	
10 3/4	40,50	8,89	57,91	2,09	30,95	17,36	7 378	7 378	12795	6968	253,30	298,45	285,75	297,00	251,30	129,00
	45,50	10,16	65,87	2,11	31,25	17,66	8 391	8 391	12795	6968	250,70	298,45	285,75	297,00	248,76	129,00
	51,00	11,43	73,75	2,14	31,55	17,96	9 394	9 394	12795	6968	248,20	298,45	285,75	297,00	246,22	129,00
	55,50	12,57	80,75	2,17	31,82	18,24	10 286	10 286	12795	6968	245,90	298,45	285,75	297,00	243,94	129,00
	60,70	13,84	88,47	2,2	32,13	18,54	11 270	11 270	12795	6968	243,40	298,45	285,75	297,00	241,40	129,00
	65,70	15,11	96,12	2,24	32,44	18,85	12 244	12 244	12795	6968	240,80	298,45	285,75	297,00	238,86	129,00
	73,20	17,07	107,76	2,31	32,92	19,33	13 727	13 727	12795	6968	236,90	298,45	285,75	297,00	234,94	129,00

We draw your attention to the fact that technical characteristics are for reference only, and any person who uses this information should check its relevance, by contacting the technical department: techsales@tmk-group.com

Nominal pipe diameter	Pipe specific weight	Pipe wall thickness	Weight of plain-end pipes	Removed metal weight (both ends)		Coupling weight		Pipe cross-section area	Critical C/S area of coupling	Critical C/S area of special coupling	Inside diameter of coupling	Outside diameter of coupling	Outside diameter of special coupling	Coupling length	Drift diameter	Length makeup loss
				kg	kg	kg	kg									
11 3/4	42,00	8,46	60,50	2,27	33,6	33,6	7 707	13941	-	279,50	323,85	-	297,00	277,56	129,00	
	47,00	9,52	67,83	2,28	33,88	-	8 641	13941	-	277,40	323,85	-	297,00	275,44	129,00	
	54,00	11,05	78,32	2,31	34,27	-	9 977	13941	-	274,40	323,85	-	297,00	272,38	129,00	
	60,00	12,42	87,61	2,35	34,63	-	11 160	13941	-	271,60	323,85	-	297,00	269,64	129,00	
	65,00	13,56	95,27	2,38	34,94	-	12 136	13941	-	269,30	323,85	-	297,00	267,36	129,00	
11 7/8	71,00	14,78	103,40	2,43	35,27	-	13 172	13941	-	266,90	323,85	-	297,00	264,92	129,00	
	67,90	13,97	99,10	2,43	34,48	-	12 625	13813	-	271,70	326,50	-	297,00	269,72	129,00	
12 3/4	71,80	14,78	104,56	2,46	34,7	-	13 319	13813	-	270,10	326,50	-	297,00	268,10	129,00	
	50,89	9,50	73,65	2,5	38,93	-	9 382	16048	-	302,90	351,00	-	297,00	300,88	129,00	
	58,78	11,00	84,87	2,54	39,35	-	10 811	16048	-	299,90	351,00	-	297,00	297,88	129,00	
	65,13	12,40	95,24	2,57	39,76	-	12 133	16048	-	297,10	351,00	-	297,00	295,08	129,00	
	72,87	14,00	106,98	2,63	40,22	-	13 628	16048	-	293,90	351,00	-	297,00	291,88	129,00	
13 3/8	54,50	9,65	78,55	2,62	38,46	-	10 007	15795	-	318,40	365,12	-	297,00	316,45	129,00	
	61,00	10,92	88,55	2,65	38,85	-	11 280	15795	-	315,90	365,12	-	297,00	313,91	129,00	
	68,00	12,19	98,46	2,69	39,23	-	12 543	15795	-	313,30	365,12	-	297,00	311,37	129,00	
13 5/8	72,00	13,06	105,21	2,72	39,5	-	13 403	15795	-	311,60	365,12	-	297,00	309,63	129,00	
	79,1	14,10	115,44	2,81	40,85	-	14 706	16222	-	315,90	371,70	-	297,00	313,12	129,00	
	88,2	15,88	129,31	2,89	41,42	-	16 473	16222	-	312,30	371,70	-	297,00	309,56	129,00	
	105,1	19,30	155,54	3,07	42,52	-	19 814	16222	-	305,50	371,70	-	297,00	302,72	129,00	

We draw your attention to the fact that technical characteristics are for reference only, and any person who uses this information should check its relevance, by contacting the technical department: techsales@tmk-group.com

Strength characteristics of pipes with TMK UP PF ET threaded connection

TMK UP PF ET

Nominal pipe diameter	Pipe specific weight	Pipe wall thickness	Yield Strength in Tension, kN												Minimum Internal Yield Pressure, MPa												Collapse Pressure, MPa											
			Minimum yield strength MPa/ksi												Minimum yield strength MPa/ksi												Minimum yield strength MPa/ksi											
			379	552	621	655	758	862	931	966	1035	1035	379	552	621	655	758	862	931	966	1035	379	552	621	655	758	862	931	966	1035								
in	mm	mm	55	80	90	95	110	125	135	140	150	155	80	90	95	110	125	135	140	150	155	80	90	95	110	125	135	140	150									
4 1/2	114,30	6,35	816	1189	1337	1411	1632	1856	2005	2080	2229	36,8	53,7	60,4	63,7	73,7	83,8	90,5	93,9	100,6	34,2	43,8	47,0	48,4	52,3	55,2	56,7	57,3	58,1									
			13,50	7,37	9,38	13,67	16,22	18,77	21,34	23,05	23,92	25,62	42,8	62,3	70,1	73,9	85,5	97,3	105,1	109,0	116,8	44,3	59,0	64,2	66,7	73,8	80,1	83,9	85,7	88,9								
5	127,0	7,62	1070	1558	1753	1849	2140	2433	2628	2727	2921	39,3	57,2	64,3	67,9	78,5	89,3	96,5	100,1	107,2	38,4	50,0	54,1	56,0	61,1	65,4	67,8	68,9	70,7									
			15,00	8,56	10,78	15,70	17,66	18,63	21,55	24,51	26,47	27,47	29,43	48,7	72,3	81,4	85,8	99,3	113,0	122,0	126,6	135,6	52,6	76,5	88,9	88,1	98,9	109,2	115,7	118,9	124,9							
5 1/2	139,70	9,14	1289	1878	2112	2228	2578	2932	3167	3286	3520	48,0	69,9	78,6	82,9	96,0	109,2	117,9	122,3	131,1	150,9	72,3	79,4	82,9	92,8	102,2	108,0	110,8	116,2									
			21,40	11,10	12,98	18,91	21,28	22,44	25,97	29,53	31,90	33,10	35,46	58,0	84,4	95,0	100,2	115,9	131,8	142,4	147,8	158,3	60,5	88,1	99,1	104,6	121,1	137,6	148,6	154,1	165,1							
6 5/8	168,28	10,59	1298	1891	2128	2244	2597	2953	3190	3310	3546	63,4	92,3	103,9	109,6	126,8	144,2	155,7	161,6	173,1	165,6	95,4	107,4	113,3	131,2	149,1	161,1	167,0	179,0									
			24,10	12,70	12,98	18,91	21,28	22,44	25,97	29,53	31,90	33,10	35,46	66,3	96,6	108,7	114,6	132,7	150,9	162,9	169,1	181,1	68,3	99,4	111,8	118,0	136,6	155,3	167,7	173,9	186,3							
6 5/8	168,28	10,59	1500	2167	2426	2509	2710	2811	3012	3313	3614	43,5	63,4	71,3	75,2	87,1	99,0	106,9	111,0	118,9	118,9	50,5	27,9	34,4	36,2	37,0	38,8	40,5	41,9	42,5	43,5							
			28,00	12,06	12,43	20,43	22,98	24,24	28,05	31,90	34,46	35,75	38,31	43,5	63,4	71,3	75,2	87,1	99,0	106,9	111,0	118,9	118,9	50,5	27,9	34,4	36,2	37,0	38,8	40,5	41,9	42,5						
7	177,8	11,51	1279	1878	2112	2228	2578	2932	3167	3286	3520	48,0	69,9	78,6	82,9	96,0	109,2	117,9	122,3	131,1	150,9	72,3	79,4	82,9	92,8	102,2	108,0	110,8	116,2									
			32,00	14,15	14,53	24,10	26,65	27,92	31,73	35,58	37,92	39,26	42,09	48,0	69,9	78,6	82,9	96,0	109,2	117,9	122,3	131,1	150,9	72,3	79,4	82,9	92,8	102,2	108,0	110,8	116,2							

We draw your attention to the fact that technical characteristics are for reference only, and any person who uses this information should check its relevance, by contacting the technical department: techsales@tmk-group.com

Strength characteristics of pipes with TMK UP PF ET threaded connection

Nominal pipe diameter	Pipe specific weight	Pipe wall thickness	Yield Strength in Tension, kN												Minimum Internal Yield Pressure, MPa												Collapse Pressure, MPa											
			Minimum yield strength MPa/ksi												Minimum yield strength MPa/ksi												Minimum yield strength MPa/ksi											
			379	552	621	655	758	862	931	966	1035	1035	379	552	621	655	758	862	931	966	1035	379	552	621	655	758	862	931	966	1035								
in	mm	mm	55	80	90	95	110	125	135	140	150	155	80	90	95	110	125	135	140	150	155	80	90	95	110	125	135	140	150									
7	177,8	8,05	1627	2370	2666	2812	3254	3701	3997	4147	4443	30,0	43,7	49,2	51,9	60,1	68,3	73,8	76,5	82,0	22,5	26,4	34,7	28,6	30,6	32,0	32,6	32,8	33,0									
			29,00	10,36	20,65	30,08	33,84	35,70	41,31	46,98	50,74	52,64	56,40	38,6	56,3	63,3	66,8	77,3	87,9	94,9	98,5	105,5	37,3	48,4	66,3	54,0	58,8	62,8	65,0	65,9	67,5							
7 5/8	193,68	12,65	1279	1878	2112	2228	2578	2932	3167	3286	3520	48,0	69,9	78,6	82,9	96,0	109,2	117,9	122,3	131,1	150,9	72,3	79,4	82,9	92,8	102,2	108,0	110,8	116,2									
			35,00	14,15	22,79	33,19	37,34	39,39	45,58	51,83	55,98	58,09	62,23	42,9	62,5	70,4	74,2	85,9	97,7	105,5	109,4	117,3	44,8	59,4	82,0	67,6	74,4	81,3	85,2	87,0	90,4							
8 5/8	219,08	14,27	1289	1878	2112	2228	2578	2932	3167	3286	3520	48,0	69,9	78,6	82,9	96,0	109,2	117,9	122,3	131,1	150,9	72,3	79,4	82,9	92,8	102,2	108,0	110,8	116,2									
			42,80	15,11	30,61	44,59	50,16	52,90	61,22	69,62	75,20	78,02	83,60	51,7	75,4	84,8	89,4	103,5	117,7	127,1	131,9	141,3	54,6	79,4	89,3	94,3	106,5	117,9	125,3	128,8	135,7							
8 5/8	219,08	14,27	1500	2167	2426	2509	2710	2811	3012	3313	3614	43,5	63,4	71,3	75,2	87,1	99,0	106,9	111,0	118,9	118,9	50,5	27,9	34,4	36,2	37,0	38,8	40,5	41,9	42,5	43,5							
			49,00	14,15	34,53	50,29	56,57	59,05	78,53	84,81	88,00	94,29	42,8	62,4	70,2	74,0	85,7	97,4	105,2	109,2	117,0	144,5	59,1	64,4	67,0	74,1	80,4	84,1	85,8	89,1								

We draw your attention to the fact that technical characteristics are for reference only, and any person who uses this information should check its relevance, by contacting the technical department: techsales@tmk-group.com

TMK UP PF ET
Strength characteristics of pipes with TMK UP PF ET threaded connection

Nominal pipe diameter	Pipe specific weight	Pipe wall thickness	Yield Strength in Tension, kN															Minimum Internal Yield Pressure, MPa															Collapse Pressure, MPa														
			Minimum yield strength MPa/ksi															Minimum yield strength MPa/ksi															Minimum yield strength MPa/ksi														
			379	552	621	655	758	862	931	966	1035	379	552	621	655	758	862	931	966	1035	379	552	621	655	758	862	931	966	1035																		
in	mm	mm	55	80	90	95	110	125	135	140	150	155	160	170	180	190	200	210	220	230	240	250	260	270	280	290																					
			36.00	2507	3652	4108	4333	5014	5702	6159	6384	6847	24.3	35.9	39.7	41.9	48.5	55.2	59.6	61.8	66.2	14.0	16.4	16.8	17.0	17.1	17.2	17.3	17.4																		
			40.00	2800	4078	4588	4839	5600	6368	6878	7129	7646	27.2	39.6	44.6	47.0	54.4	61.9	66.8	69.3	74.3	17.7	21.3	22.4	22.9	23.9	24.3	24.4	24.5																		
			43.50	11.05	3071	4473	5032	5308	6142	6985	7544	820	8387	30.0	43.7	49.1	51.8	60.0	68.2	73.6	76.3	81.9	22.4	26.3	27.7	28.5	30.5	31.9	32.5	32.6	32.7																
			47.00	11.99	3319	4834	5438	5736	6638	7549	8153	8451	9064	32.5	47.4	53.3	56.2	65.1	74.0	79.9	82.8	88.8	26.8	32.8	34.5	35.1	36.5	38.9	40.1	40.6	41.4																
9 5/8	244.48		53.50	13.84	3801	5536	6227	6568	7601	8644	9336	9677	10379	37.5	54.7	61.5	64.9	75.1	85.4	92.2	95.6	102.5	35.4	45.6	49.1	50.6	54.8	58.1	59.9	60.6	61.8																
			58.40	15.11	4127	6010	6761	7132	8253	9386	10137	10507	11269	41.0	59.7	67.2	70.8	82.0	93.2	100.7	104.4	111.9	41.3	54.5	59.1	61.3	67.3	72.7	75.8	77.2	79.7																
			64.90	17.07	4362	6354	7148	7539	8725	9922	10716	11107	11913	46.3	67.4	75.9	80.0	92.6	105.3	113.8	117.9	126.5	49.3	68.0	74.6	77.7	86.7	95.1	100.3	102.7	107.4																
			70.30	18.64	4362	6354	7148	7539	8725	9922	10716	11107	11913	50.6	73.7	82.9	87.4	101.1	115.0	124.2	128.8	138.1	53.5	77.8	86.9	90.9	102.2	113.0	119.9	123.2	129.6																
			75.60	20.24	4362	6354	7148	7539	8725	9922	10716	11107	11913	54.9	80.0	90.0	94.9	109.8	124.9	134.9	139.8	149.9	57.6	83.8	94.3	99.6	115.3	131.0	139.9	144.0	152.2																
9 7/8	250.83		62.80	15.88	4442	6470	7279	7677	8885	10104	10913	11311	12132	42.0	61.2	68.8	72.6	84.0	95.5	103.1	106.9	114.7	43.0	57.0	62.0	64.3	70.9	76.9	80.3	82.0	84.9																
			66.40	16.79	4679	6814	7666	8086	9358	10641	11493	11913	12777	44.4	64.7	72.7	76.7	88.8	101.0	109.1	113.0	121.2	47.1	63.1	69.0	71.7	79.7	87.0	91.4	93.5	97.4																
			72.10	18.29	4712	6863	7721	8144	9424	10717	11575	11998	12868	48.4	70.4	79.2	83.6	96.7	110.0	118.8	123.1	132.1	51.2	73.3	80.5	84.0	94.1	103.7	109.7	112.6	118.1																
			40.50	8.39	2796	4072	4582	4832	5592	6360	6869	719	7636	21.6	31.5	35.4	37.3	43.2	49.1	53.0	55.0	59.0	10.9	11.9	12.0	12.0	12.1	12.2	12.3	12.4	12.5																
			45.50	10.16	3180	4632	5211	5496	6360	7233	7812	8097	8685	24.7	35.9	40.4	42.7	49.4	56.1	60.6	62.8	67.4	14.4	17.1	17.7	17.8	17.9	18.0	17.5	17.6	17.7																
			51.00	11.43	3560	5186	5834	6153	7121	8098	8746	9066	9723	27.8	40.4	45.5	48.0	55.5	63.1	68.2	70.7	75.8	18.7	22.2	23.5	24.0	25.2	25.8	25.9	26.0	26.1																
10 3/4	273.05		55.50	12.57	3899	5678	6388	6738	7797	8867	9577	9926	10646	30.5	44.5	50.0	52.8	61.1	69.4	75.0	77.7	83.4	23.4	27.7	28.7	29.6	31.8	33.4	34.1	34.4	34.7																
			60.70	13.84	4271	6221	6999	7382	8543	9715	10493	10876	11665	33.6	48.0	55.1	58.1	67.2	76.5	82.6	85.6	91.8	28.7	35.6	37.6	38.5	40.5	41.9	43.4	44.0	45.1																
			65.70	15.11	4641	6759	7604	8020	9281	10555	11399	11816	12673	36.7	53.5	60.1	63.4	73.4	83.5	90.2	93.5	100.2	34.0	43.5	46.6	48.0	51.7	54.6	56.0	56.6	57.4																
			73.20	17.07	4849	7063	7946	8381	9699	11029	11912	12347	13243	41.5	60.4	67.9	71.7	82.9	94.3	101.9	105.6	113.2	42.1	55.6	60.4	62.7	69.1	74.6	77.9	79.4	82.8																

We draw your attention to the fact that technical characteristics are for reference only, and any person who uses this information should check its relevance, by contacting the technical department: techsales@tmk-group.com

Strength characteristics of pipes with TMK UP PF ET threaded connection


Nominal pipe diameter	Pipe specific weight	Pipe wall thickness	Yield Strength in Tension, kN															Minimum Internal Yield Pressure, MPa															Collapse Pressure, MPa														
			Minimum yield strength MPa/ksi															Minimum yield strength MPa/ksi															Minimum yield strength MPa/ksi														
			379	552	621	655	758	862	931	966	1035	379	552	621	655	758	862	931	966	1035	379	552	621	655	758	862	931	966	1035																		
in	mm	mm	55	80	90	95	110	125	135	140	150	155	160	170	180	190	200	210	220	230	240	250	260	270	280	290																					
			42.00	2921	4254	4786	5048	5842	6644	7176	7445	7977	18.8	27.4	30.8	32.5	37.6	42.8	46.2	47.9	51.3	7.7	7.8	7.9	8.0	8.1	8.2	8.3	8.4	8.5																	
			47.00	9.52	3275	4770	5366	5660	6550	7449	8045	8348	8944	21.2	30.9	34.7	36.6	42.3	48.1	52.0	53.9	57.8	10.4	10.5	10.6	10.7	10.8	10.9	11.0	11.1	11.2																
11 3/4	298.45		54.00	11.05	3781	5507	6196	6535	7563	8600	9289	9638	10326	24.6	36.8	40.2	42.4	49.1	55.9	60.3	62.6	67.1	14.3	16.9	17.4	17.6	17.7	17.8	17.9	18.0	18.1																
			60.00	12.42	4230	6161	6931	7310	8460	9620	10390	10781	11551	27.6	40.2	45.2	47.7	55.2	62.8	67.8	70.4	75.4	18.4	21.9	23.2	23.7	24.9	25.4	25.5	25.6	25.7																
			65.00	13.56	4600	6699	7537	7949	9199	10462	11299	11724	12561	30.1	43.9	49.4	52.1	60.3	68.5	74.0	76.8	82.3	22.7	26.7	28.0	28.8	30.8	32.3	32.9	33.1	33.3																
			71.00	14.78	4992	7271	8180	8627	9984	11354	12263	12724	13633	32.8	47.8	53.8	56.8	65.7	74.7	80.7	83.7	89.7	27.3	33.6	35.4	36.1	37.7	39.7	41.0	41.6	42.5																
11 7/8	301.63		67.90	13.97	4785	6969	7840	8269	9570	10883	11754	12196	13067	30.7	44.7	50.3	53.1	61.4	69.9	75.5	78.3	83.9	23.7	28.2	29.2	29.9	32.2	33.9	34.7	35.0	35.3																
			71.80	14.78	5048	7352	8271	8724	10096	11481	12400	12866	13785	32.5	47.3	53.3	56.2	65.0	73.9	79.8	82.8	88.8	26.7	32.7	34.4	35.0	36.4	38.8	40.0	40.5	41.3																
			50.89	9.50	3556	5179	5826	6145	7111	8087	8734	9063	9710	19.5	28.3	31.9	33.6	38.9	44.3	47.8	49.6	53.1	8.5	8.6	8.7	8.7	8.8	8.9	9.0	9.1	9.2																
12 3/4	323.85		58.78	11.00	4097	5968	6714	7081	8195	9319	10065	10444	11190	22.5	32.8	36.9	38.9	45.1	51.2	55.3	57.4	61.5	12.0	13.5	13.6	13.6	13.7	13.8	13.9	14.0	14.1																
			65.13	12.40	4598	6697	7534	7947	9197	10458	11296	11747	12557	25.4	37.0	41.6	43.9	50.8	57.8	62.4	64.7	69.4	15.2	18.2	19.0	19.3	19.6	19.7	19.8	19.9	20.0																
			72.87	14.00	5165	7523	8463	8926	10330	11747	12688	13165	14105	28.7	41.8	47.0	49.6	57.3	65.2	70.4	73.1	78.3	20.2	23.7	25.2	25.8	27.4	28.3	28.5	28.6	28.7																
13 3/8	339.72		54.50	9.65	3793	5524	6214	6554	7585	8626	9316	9667	10357	18.8	27.4	30.9	32.6	37.7	42.8	46.0	48.0	51.4	7.8	7.9	8.0	8.0	8.1	8.2	8.3	8.4	8.5																
			61.00	10.92	4275	6227	7005	7389	8550	9724	10502	10897	11675	21.3	31.1	34.9	36.8	42.6	48.5	52.4	54.3	58.2	10.6	10.7	10.8	10.8	10.9	11.0	11.1	11.2	11.3																
			68.00	12.19	4754	6924	7789	8216	9508	10812	11678	12117	12982	23.8	34.7	39.0	41.1	47.6	54.1	58.5	60.7	65.0	13.4	15.6	16.0	16.1	16.2	16.3	16.4	16.5	16.6																
			72.00	13.06	5080	7398	8323	8779	10159	11553	12478	12947	13872	25.5	37.1	41.8	44.1	51.0	58.0	62.6	65.0	69.6	15.4	18.4	19.2	19.5	19.9	20.0	20.1	20.2	20.3																
			79.1	14.10	5573	8117	9132	9632	11147	12676	13691	14206	15220	27.0	39.4	44.3	46.7	54.0	61.5	66.4	68.9	73.8	17	21	22	22	23	24	24	24	24																
13 5/8	346.08		88.2	15.88	6243	9093	10230	10790	12487	14200	15337	15913	17050	44.3	49.9	52.6	60.9	69.2	74.8	77.6	83.1	44.3	27	29	29	29	32	33	34	34	27																
			105.1	19.30	7509	10937	1																																								

PRO SERIES / TMK UP™


Centum



TMK UP
CENTUM

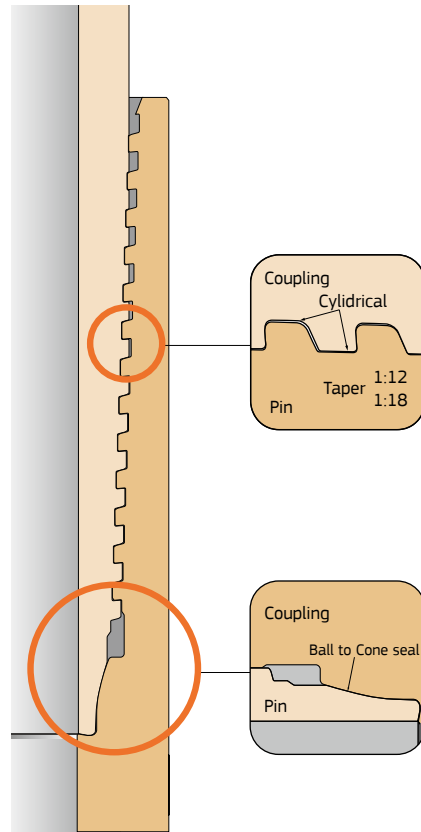

TMK UP CENTUM Performance Envelope

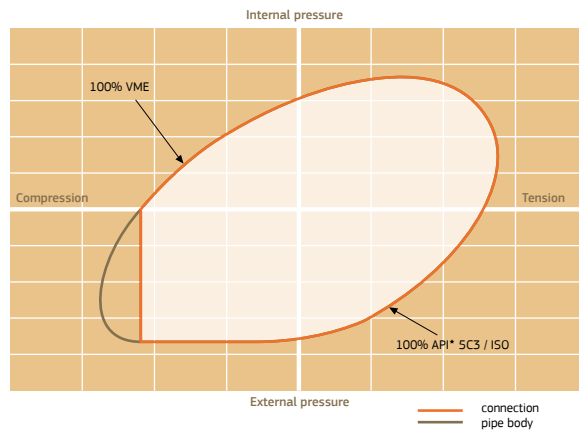

TMK UP CENTUM for Casing and Tubing

TMK UP CENTUM is threaded and coupled gas-tight quick-assembly connection for casing and tubing. It has 100% efficiency in both compression and tension that allows to use the connection in deep horizontal wells, in particular, in highly deviated wells with large step out and extended horizontal areas.

Qualified to API* 5C5 CAL IV. Can be used on SAGD projects and for CSS cyclic steam stimulation (ISO 12835 tested).

Tubing: 2 3/8"–4 1/2" / 60,32–114,30 mm

Casing: 4 1/2"–14" / 114,3–355,60 mm

Unique Feature:

- 100%** compression efficiency
- 100%** tension efficiency
- Gas-tight metal-to-metal seal
- Over-torque protection during make-up
- Quick-assembly connection
- Deep and easy stabbing
- Increased bending capacity
- Hooked thread profile
- Reduced cross threading
- Robust galling resistance

Application:

- Casing and tubing
- Deviated and horizontal wells
- Gas and oil wells
- RIH with rotation
- Cementing with rotation
- HPHT
- SAGD/CSS projects
- Complicated well trajectory

Nominal pipe diameter	Weight per unit length of pipe		Pipe wall thickness	Plain end pipe weight	Mass of removed metal (2 ends) in standard execution	Mass of removed metal (2 ends) in special execution	Mass of removed metal (2 ends) in alternative execution	Mass of removed metal (2 ends) in internal flush design	Coupling weight					
	lb/ft	kg/m							kg	kg	kg	kg	kg	kg
1	3	5	4	6.61	0.13	-	8	9	10	11	12	13	14	15
2	4.60	6.61	4.83	8.57	0.13	-	2.06	-	-	-	-	-	-	-
2 3/8	5.80	8.57	6.45	9.76	0.14	-	2.10	-	-	-	-	-	-	-
	6.60	9.76	7.49	10.89	0.14	-	2.14	-	-	-	-	-	-	-
	7.35	10.89	8.53	11.29	0.18	-	3.30	2.20	-	-	-	-	-	-
2 7/8	6.40	11.41	7.01	12.57	0.18	-	3.34	2.26	-	-	-	-	-	-
	8.60	12.57	7.82	13.72	0.18	-	3.36	2.28	-	-	-	-	-	-
	9.35	13.72	8.64	15.49	0.18	-	3.38	2.30	-	-	-	-	-	-
	10.50	15.49	9.96	17.05	0.18	-	3.42	2.32	-	-	-	-	-	-
	11.50	17.05	11.18	18.99	0.18	-	3.44	2.36	-	-	-	-	-	-
	7.70	11.29	5.49	11.29	0.36	-	5.46	3.80	-	-	-	-	-	-
	9.20	13.12	6.45	13.12	0.37	-	5.50	3.82	-	-	-	-	-	-
	10.20	14.76	7.34	14.76	0.37	-	5.52	3.84	-	-	-	-	-	-
3 1/2	12.70	18.64	9.52	21.00	0.47	-	5.58	3.90	-	-	-	-	-	-
	14.30	21.00	10.92	22.90	0.38	-	5.60	3.92	-	-	-	-	-	-
	15.50	22.90	12.09	25.04	0.38	-	5.64	3.96	-	-	-	-	-	-
	17.00	25.04	13.46	25.04	0.38	-	5.66	4.00	-	-	-	-	-	-
	9.50	13.57	5.74	13.57	0.42	-	6.12	3.22	-	-	-	-	-	-
	10.70	15.57	6.65	15.57	0.43	-	6.14	3.26	-	-	-	-	-	-
4	13.20	19.27	8.38	19.27	0.44	-	6.20	3.30	-	-	-	-	-	-
	16.10	23.67	10.54	23.67	0.44	-	6.24	3.36	-	-	-	-	-	-

We draw your attention to the fact that technical characteristics are for reference only, and any person who uses this information should check its relevance, by contacting the technical department: techsales@tmk-group.com

Standard coupling in internal flush design	Special coupling in internal flush design	Pipe cross-section area	Coupling critical cross-section area	Special coupling critical cross-section area	Standard coupling inside diameter	Special coupling inside diameter	Alternative coupling inside diameter	Internally flush coupling inside diameter	Coupling outside diameter	Special coupling outside diameter	Coupling length	Drift outside diameter	Special drift outside diameter	Alternative drift outside diameter	Drift outside diameter for internally flush pipes	Make-up loss
16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32
-	-	842	1348	-	4970	-	-	-	7300	-	17000	4828	-	-	-	7000
-	-	1092	1348	-	4790	-	-	-	7300	-	17000	4504	-	-	-	7000
-	-	1243	1348	-	4680	-	-	-	7300	-	17000	4296	-	-	-	7000
-	-	1388	1348	-	4570	-	-	-	7300	-	17000	4088	-	-	-	7000
-	-	1169	2095	1325	6150	-	-	-	8890	8320	18000	5962	-	-	-	7350
-	-	1454	2095	1325	5980	-	-	-	8890	8320	18000	5662	-	-	-	7350
-	-	1602	2095	1325	5890	-	-	-	8890	8320	18000	5500	-	-	-	7350
-	-	1747	2095	1325	5800	-	-	-	8890	8320	18000	5336	-	-	-	7350
-	-	1973	2095	1325	5670	-	-	-	8890	8320	18000	5072	-	-	-	7350
-	-	2172	2095	1325	5550	-	-	-	8890	8320	18000	4828	-	-	-	7350
-	-	1439	3142	1540	7660	-	-	-	10800	9810	21000	7474	-	-	-	9390
-	-	1671	3142	1540	7510	-	-	-	10800	9810	21000	7282	-	-	-	9390
-	-	1881	3142	1540	7410	-	-	-	10800	9810	21000	7104	-	-	-	9390
-	-	2374	3142	1540	7170	-	-	-	10800	9810	21000	6688	-	-	-	9390
-	-	2675	3142	1540	7020	-	-	-	10800	9810	21000	6388	-	-	-	9390
-	-	2917	3142	1540	6900	-	-	-	10800	9810	21000	6154	-	-	-	9390
-	-	3190	3142	1540	6750	-	-	-	10800	9810	21000	5890	-	-	-	9390
-	-	1729	3557	1792	8880	-	-	-	12070	11100	21000	8694	-	-	-	9500
-	-	1984	3557	1792	8760	-	-	-	12070	11100	21000	8512	-	-	-	9500
-	-	2454	3557	1792	8570	-	-	-	12070	11100	21000	8166	-	-	-	9500
-	-	3015	3557	1792	8330	-	-	-	12070	11100	21000	7734	-	-	-	9500

Geometrical parameters of pipes with threaded connection TMK UP CENTUM



Nominal pipe diameter	Weight per unit length of pipe		Pipe wall thickness	Plain end pipe weight	Mass of removed metal (2 ends) in standard execution	Mass of removed metal (2 ends) in special execution	Mass of removed metal (2 ends) in alternative execution	Mass of removed metal (2 ends) in internal flush design	Coupling weight					
	lb/ft	kg/m							kg	kg	kg	kg	kg	kg
1	mm	3	4	5	6	7	8	9	10	11	12	13	14	15
	2	11,60	6,35	16,91	0,30	-	-	-	5,39	4,21	-	-	-	-
4 1/2	mm	12,60	6,88 tubing	18,23	0,61	-	-	-	7,62	4,66	-	-	-	-
		13,50	7,37 tubing	19,44	0,31	-	0,30	-	5,47	4,29	-	-	-	-
5 1/2	mm	15,10	8,56	22,32	0,31	-	-	0,30	5,70	4,39	-	-	-	-
		15,20	8,56 tubing	22,32	0,61	-	0,30	-	7,70	4,76	-	-	-	-
6 5/8	mm	17,00	9,65 tubing	24,90	0,61	-	-	-	7,70	4,76	-	-	-	-
		18,90	10,92 tubing	27,84	0,62	-	-	-	7,80	4,84	-	-	-	-
139,7	mm	21,50	12,70 tubing	31,82	0,62	-	-	-	7,88	4,92	-	-	-	-
		17,00	7,72	25,13	0,88	-	-	-	10,36	5,24	-	-	-	-
139,7	mm	20,00	9,17	29,52	1,29	1,29	-	-	13,42	6,88	13,40	6,86	-	-
		23,00	10,54	33,57	1,29	-	-	-	13,60	7,06	-	-	-	-
168,28	mm	26,00	12,09	38,05	1,30	-	-	-	13,82	7,26	-	-	-	-
		26,80	12,70	39,78	1,31	-	-	-	13,88	7,34	-	-	-	-
168,28	mm	28,40	13,46	41,90	1,38	-	-	-	14,04	7,46	-	-	-	-
		20,00	7,32	29,06	1,02	-	-	-	11,94	6,38	-	-	-	-
168,28	mm	24,00	8,94	35,13	1,53	-	-	-	15,80	8,70	-	-	-	-
		28,00	10,59	41,18	1,54	-	-	-	15,92	8,82	-	-	-	-
32,00	mm	12,06	46,46	1,55	-	-	-	16,04	8,94	-	-	-	-	-

We draw your attention to the fact that technical characteristics are for reference only, and any person who uses this information should check its relevance, by contacting the technical department: techsales@tmk-group.com

Geometrical parameters of pipes with threaded connection TMK UP CENTUM

Standard coupling in internal flush design	Special coupling in internal flush design	Pipe cross-section area	Coupling critical cross-section area	Special coupling critical cross-section area	Standard coupling inside diameter	Special coupling inside diameter	Alternative coupling inside diameter	Internally flush coupling inside diameter	Coupling outside diameter	Special coupling outside diameter	Coupling length	Drift outside diameter	Special drift outside diameter	Alternative drift outside diameter	Drift outside diameter for internally flush pipes	Make-up loss
16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32
-	-	2 154	2 696	2 069	100,40	-	-	-	127,00	123,82	240,00	98,42	-	-	-	105,00
-	-	2 322	3 875	2 304	99,30	-	-	-	132,10	124,30	240,00	97,36	-	-	-	105,00
5,42	4,24	2 476	2 696	2 069	98,40	-	-	99,56	127,00	123,82	240,00	96,38	-	-	96,38	105,00
7,56	4,62	2 476	3 875	2 304	98,40	-	-	99,56	127,00	123,82	240,00	96,38	-	-	96,38	105,00
5,53	4,35	2 844	2 696	2 069	96,00	-	-	97,18	127,00	123,82	240,00	94,00	-	-	94,00	105,00
7,66	4,72	2 844	3 875	2 304	96,00	-	-	97,18	132,10	124,30	240,00	94,00	-	-	94,00	105,00
-	-	3 173	3 875	2 304	96,00	-	-	-	132,10	124,30	240,00	91,82	-	-	-	105,00
-	-	3 547	3 875	2 304	94,80	-	-	-	132,10	124,30	240,00	89,28	-	-	-	105,00
-	-	4 054	3 875	2 304	92,90	-	-	-	132,10	124,30	240,00	85,72	-	-	-	105,00
-	-	3 201	5 089	2 466	122,20	-	-	-	160,02	149,22	250,00	121,08	-	-	-	119,60
-	-	3 760	5 370	2 747	119,20	120,40	-	-	160,02	149,22	320,00	118,18	119,38	-	-	155,00
13,57	7,03	4 277	5 370	2 747	116,40	-	-	118,62	160,02	149,22	320,00	115,44	-	-	115,44	155,00
13,79	7,23	4 847	5 370	2 747	113,30	-	-	115,52	160,02	149,22	320,00	112,34	-	-	112,34	155,00
13,85	7,31	5 067	5 370	2 747	112,10	-	-	114,30	160,02	149,22	320,00	111,12	-	-	111,12	155,00
-	-	5 338	5 370	2 747	110,80	-	-	112,80	160,02	149,22	320,00	109,60	-	-	109,60	155,00
-	-	3 702	5 796	2 951	151,50	-	-	-	187,71	177,80	250,00	150,46	-	-	-	118,10
-	-	4 475	5 979	3 134	148,20	-	-	-	187,71	177,80	320,00	147,22	-	-	-	149,40
15,85	8,75	5 246	5 979	3 134	144,90	-	-	147,10	187,71	177,80	320,00	143,92	-	-	-	149,40
15,96	8,86	5 919	5 979	3 134	142,00	-	-	144,16	187,71	177,80	320,00	140,98	-	-	-	149,40

Geometrical parameters of pipes with threaded connection TMK UP CENTUM



Nominal pipe diameter	Weight per unit length of pipe		Pipe wall thickness	Plain end pipe weight	Mass of removed metal (2 ends) in standard execution	Mass of removed metal (2 ends) in special execution	Mass of removed metal (2 ends) in internal flush design	Coupling weight						
	lb/ft	kg/m						kg	kg	kg	kg	kg	kg	kg
1	3	5	4	5	6	7	8	9	10	11	12	13	14	15
7	23,00	33,70	8,05	33,70	1,86	-	-	-	17,24	8,20	-	-	-	-
	26,00	38,21	9,19	38,21	1,87	-	-	-	18,72	9,08	-	-	-	-
7	29,00	42,78	10,36	42,78	1,87	2,00	-	1,86	18,78	9,12	18,70	9,08	-	-
	32,00	47,20	11,51	47,20	1,88	-	2,01	1,87	18,82	9,18	-	-	18,82	9,16
7 5/8	35,00	51,52	12,65	51,52	1,89	-	-	1,88	18,88	9,24	-	-	-	-
	38,00	55,52	13,72	55,52	3,18	-	-	-	20,24	10,60	-	-	-	-
7 5/8	29,70	43,24	9,52	43,24	1,96	-	-	-	20,22	12,34	-	-	-	-
	33,70	49,22	10,92	49,22	1,98	-	-	-	20,32	12,44	-	-	-	-
8 5/8	39,00	56,68	12,70	56,68	1,98	-	-	-	20,44	15,56	-	-	-	-
	36,00	51,93	10,16	52,35	2,40	-	-	-	25,92	14,06	-	-	-	-
8 5/8	40,00	58,53	11,43	58,53	2,40	-	-	-	26,00	14,14	-	-	-	-
	44,00	64,64	12,70	64,64	2,42	-	-	-	26,08	14,22	-	-	-	-
9 5/8	36,00	51,93	8,94	51,93	2,28	-	-	-	29,00	15,88	-	-	-	-
	40,00	57,99	10,03	57,99	2,65	-	2,65	2,63	29,14	16,02	-	-	29,10	15,97
9 5/8	43,50	63,61	11,05	63,61	3,59	-	-	-	30,24	17,12	30,22	17,10	-	-
	47,00	68,75	11,99	68,75	3,60	-	-	3,59	30,30	17,18	-	-	-	-
9 5/8	53,50	78,72	13,84	78,72	3,61	-	3,61	3,60	30,42	17,28	-	-	30,34	17,20
	58,40	85,47	15,11	85,47	4,44	-	-	-	30,28	19,58	-	-	-	-
9 5/8	59,40	87,37	15,47	87,37	4,46	-	-	-	30,34	19,64	-	-	-	-
	64,90	95,73	17,07	95,73	4,48	-	-	-	30,58	19,88	-	-	-	-

We draw your attention to the fact that technical characteristics are for reference only, and any person who uses this information should check its relevance, by contacting the technical department: techsales@tmk-group.com

Geometrical parameters of pipes with threaded connection TMK UP CENTUM

Standard coupling in internal flush design	Special coupling in internal flush design	Pipe cross-section area	Coupling critical cross-section area	Special coupling critical cross-section area	Standard coupling inside diameter	Special coupling inside diameter	Alternative coupling inside diameter	Internally flush coupling inside diameter	Coupling outside diameter	Special outside diameter	Coupling length	Drift outside diameter	Special drift outside diameter	Alternative drift outside diameter	Drift outside diameter for internally flush pipes	Make-up loss
16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32
-	-	4 293	6958	3086	159,50	-	-	-	200,03	187,32	300,00	158,52	-	-	-	139,50
-	-	4 868	6958	3086	172,20	-	-	-	200,03	187,32	320,00	156,24	-	-	-	154,50
18,73	9,07	5 450	6958	3086	154,90	156,60	-	157,08	200,03	187,32	320,00	153,90	155,58	-	153,90	154,50
18,77	9,13	6 013	6958	3086	152,60	-	153,40	154,78	200,03	187,32	320,00	151,60	-	152,40	151,60	154,50
18,83	9,19	6 563	6958	3086	150,30	-	-	152,50	200,03	187,32	320,00	149,32	-	-	149,32	154,50
-	-	7 072	6958	3086	150,30	-	-	-	200,03	187,32	320,00	147,18	-	-	-	152,70
-	-	5 508	7807	4650	172,50	-	-	174,64	215,90	206,38	320,00	171,46	-	-	171,46	152,50
-	-	6 270	7807	4650	169,70	-	-	171,84	215,90	206,38	320,00	168,66	-	-	168,66	152,50
-	-	7 221	7807	4650	166,10	-	-	168,28	215,90	206,38	320,00	165,10	-	-	165,10	152,50
-	-	6 668	10070	5319	197,10	-	-	198,76	244,50	231,80	320,00	195,58	-	-	195,58	154,00
-	-	7 456	10070	5319	194,50	-	-	196,22	244,50	231,80	320,00	193,04	-	-	193,04	154,00
-	-	8 234	10070	5319	192,00	-	-	193,68	244,50	231,80	320,00	190,50	-	-	190,50	154,00
-	-	6 615	10904	5647	224,10	-	-	-	269,88	257,18	320,00	222,63	-	-	-	147,00
28,97	15,85	7 388	10904	5647	222,00	-	223,80	224,42	269,88	257,18	320,00	220,45	-	222,25	220,45	147,00
-	-	8 103	12342	7085	219,90	220,50	-	-	269,88	257,18	320,00	218,41	219,08	-	-	155,00
30,23	17,11	8 757	12342	7085	218,00	-	-	220,50	269,88	257,18	320,00	216,53	-	-	216,53	155,00
30,35	17,21	10 028	12342	7085	214,30	-	217,40	216,80	269,88	257,18	320,00	212,83	-	215,90	212,83	155,00
-	-	10 888	12342	7085	214,3	-	-	-	269,9	257,2	300,0	211,08	-	-	-	136,0
-	-	11 130	12342	7085	213,6	-	-	-	269,9	257,2	300,0	210,36	-	-	-	136,0
-	-	12 195	12342	7085	210,4	-	-	-	269,9	257,2	300,0	207,16	-	-	-	136,0

Nominal pipe diameter	Weight per unit length of pipe	Pipe wall thickness	Plain end pipe weight	Mass of removed metal (2 ends) in standard execution	Mass of removed metal (2 ends) in special alternative execution	Mass of removed metal (2 ends) in internal flush design	Coupling weight							
							Standard coupling in standard execution	Special coupling in standard execution	Standard coupling in special execution	Special coupling in special execution	Standard coupling in special execution	Special coupling in alternative execution		
in mm	lb/ft	mm	kg/m	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg
1	3	4	5	6	7	8	9	10	11	12	13	14	15	-
9 7/8	62,80	15,88	92,01	5,77	-	5,76	32,30	26,10	-	-	-	-	-	-
10 3/4	40,50	8,89	57,91	6,28	-	-	36,54	22,00	-	-	-	-	-	-
	45,50	10,16	65,87	2,60	-	-	30,78	16,68	-	-	-	-	-	-
	51,00	11,43	73,75	5,19	-	-	34,32	19,78	-	-	-	-	-	-
	55,50	12,57	80,75	5,20	5,31	-	34,40	19,86	-	-	-	34,26	19,72	-
11 3/4	60,70	13,84	88,47	5,22	-	5,21	34,49	19,95	-	-	-	-	-	-
	65,70	15,11	96,12	2,62	-	-	30,90	16,80	-	-	-	-	-	-
12 3/4	54,0	11,05	78,32	4,22	-	-	36,78	-	-	-	-	-	-	-
	60,0	12,42	87,61	4,24	-	-	36,84	-	-	-	-	-	-	-
	65,0	13,56	95,27	4,28	-	-	37,02	-	-	-	-	-	-	-
13 3/8	71,0	14,78	103,4	4,32	-	-	37,24	-	-	-	-	-	-	-
	50,89	9,50	73,65	3,40	-	-	38,70	-	-	-	-	-	-	-
13 5/8	58,78	11,00	84,87	3,36	-	-	39,10	-	-	-	-	-	-	-
	54,50	9,65	78,55	3,43	-	-	38,40	-	-	-	-	-	-	-
14	61,00	10,92	88,55	3,45	-	3,34	38,60	-	-	-	-	-	-	-
	68,00	12,19	98,46	5,30	-	5,29	41,10	-	-	-	-	-	-	-
14	72,00	13,06	105,21	5,31	5,31	5,30	41,20	-	-	-	-	41,09	-	-
	88,20	15,88	129,31	7,87	-	7,86	46,30	-	-	-	-	-	-	-
106,00	19,05	158,11	3,7	-	-	57,34	-	-	-	-	-	-	-	

We draw your attention to the fact that technical characteristics are for reference only, and any person who uses this information should check its relevance, by contacting the technical department: techsales@tmk-group.com

Geometrical parameters of pipes with threaded connection TMK UP CENTUM

Standard coupling in internal flush design	Special coupling in internal flush design	Pipe cross-section area	Coupling critical cross-section area	Special coupling critical cross-section area	Standard coupling inside diameter	Special coupling inside diameter	Alternative coupling inside diameter	Internally flush coupling inside diameter	Coupling outside diameter	Special coupling outside diameter	Coupling length	Drift outside diameter	Special drift outside diameter	Alternative drift outside diameter	Drift outside diameter for internally flush pipes	Make-up loss
16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32
32,23	26,03	11 721	14098	1525	216,60	-	-	219,07	276,00	269,88	310,00	215,10	-	-	215,10	149,40
-	-	7 378	12192	6365	252,80	-	-	-	298,45	285,75	310,00	251,30	-	-	-	147,70
-	-	8 391	12192	6365	250,30	-	-	-	298,45	285,75	310,00	248,76	-	-	-	147,70
-	-	9 394	13967	8140	247,70	-	-	-	298,45	285,75	320,00	246,22	-	-	-	154,70
-	-	10 286	13967	8140	245,40	-	247,91	-	298,45	285,75	320,00	243,94	246,38	244,48	-	154,70
34,41	19,87	11 270	13967	8140	242,90	-	-	-	298,45	285,75	320,00	241,40	-	-	-	154,70
-	-	12 244	14928	9100	250,30	-	-	-	298,45	285,75	320,00	238,86	-	-	-	148,80
-	-	9977	14484,5	-	274,2	-	-	-	323,9	-	320,0	273,17	-	-	-	147,7
-	-	11160	14484,5	-	273,6	-	-	-	323,9	-	320,0	270,43	-	-	-	147,7
-	-	12136	14484,5	-	271,4	-	-	-	323,9	-	320,0	268,15	-	-	-	147,7
-	-	13172	14484,5	-	268,9	-	-	-	323,9	-	320,0	265,71	-	-	-	147,7
-	-	9 382	15480	-	302,40	-	-	-	351,00	-	310,00	300,88	-	-	-	149,80
39,00	-	10 811	15480	-	299,20	-	-	-	351,00	-	310,00	297,88	-	-	297,88	149,80
-	-	10 007	15189	-	318,00	-	-	-	365,12	-	310,00	316,45	-	-	-	147,90
38,46	-	11 280	15189	-	315,40	-	-	317,88	365,12	-	310,00	313,91	-	-	313,91	147,90
40,92	-	12 543	16667	-	312,90	-	-	315,34	365,12	-	310,00	311,37	-	-	311,37	145,40
41,02	-	13 403	16667	-	311,10	-	312,70	313,60	365,12	-	310,00	309,63	-	-	311,15	309,63
46,17	-	16 473	19358	-	312,70	-	-	314,32	372,50	-	310,00	311,15	-	-	311,15	144,90
-	-	20142	20572,0	-	323,4	-	-	-	384,7	-	360,0	312,54	-	-	-	144,9

TMK UP CENTUM
Strength characteristics of pipes with TMK UP CENTUM threaded connection

Nominal pipe diameter	Pipe specific weight	Yield Strength in Tension, kN		Minimum Internal Yield Pressure, MPa		Collapse Pressure, MPa					
		lb/ft	mm	lb/ft	mm	lb/ft	mm				
2 3/8	60,32	379	552	621	655	758	862	931	966	1035	
		55	80	90	95	110	125	135	140	150	150
		319	465	523	552	638	-	784	813	871	915
		5,80	6,45	414	603	678	715	827	-	1016	1054
		6,60	7,49	471	686	772	814	942	-	1157	1201
		7,35	8,53	511	744	837	883	1022	-	1255	1302
		6,40	5,51	443	645	726	765	886	1007	1088	1129
		7,80	7,01	551	802	903	952	1102	1253	1353	1404
		8,60	7,82	607	884	995	1049	1214	1381	1491	1547
		9,35	8,64	662	965	1085	1145	1325	1506	1627	1688
2 7/8	73,02	10,50	9,96	748	1089	1225	1292	1496	1701	1837	
		11,50	11,18	780	1136	1278	1348	1560	1774	1916	
		7,70	5,49	545	794	893	942	1090	1240	1339	
		9,20	6,45	633	922	1038	1094	1266	1440	1555	
		10,20	7,34	713	1038	1168	1232	1426	1621	1751	
		12,70	9,52	900	1310	1474	1555	1800	2046	2293	
		14,30	10,92	1014	1477	1661	1752	2028	2306	2491	
		15,00	12,09	1106	1610	1812	1911	2211	2515	2716	
		17,00	13,46	1159	1688	1899	2003	2318	2636	2847	
		9,50	5,74	655	954	1073	1132	1310	-	1609	
3 1/2	88,90	10,70	6,65	732	1095	1232	1299	1504	-	1847	
		13,20	8,38	930	1355	1524	1607	1860	-	2285	
		16,10	10,54	1143	1664	1872	1975	2286	-	2807	
		12,70	9,52	900	1310	1474	1555	1800	2046	2293	
		14,30	10,92	1014	1477	1661	1752	2028	2306	2491	
		15,00	12,09	1106	1610	1812	1911	2211	2515	2716	
		17,00	13,46	1159	1688	1899	2003	2318	2636	2847	
		9,50	5,74	655	954	1073	1132	1310	-	1609	
		10,70	6,65	732	1095	1232	1299	1504	-	1847	
		13,20	8,38	930	1355	1524	1607	1860	-	2285	
4	101,60	16,10	10,54	1143	1664	1872	1975	2286	-	2807	
		12,70	9,52	900	1310	1474	1555	1800	2046	2293	
		14,30	10,92	1014	1477	1661	1752	2028	2306	2491	
		15,00	12,09	1106	1610	1812	1911	2211	2515	2716	
		17,00	13,46	1159	1688	1899	2003	2318	2636	2847	
		9,50	5,74	655	954	1073	1132	1310	-	1609	
		10,70	6,65	732	1095	1232	1299	1504	-	1847	
		13,20	8,38	930	1355	1524	1607	1860	-	2285	
		16,10	10,54	1143	1664	1872	1975	2286	-	2807	
		17,00	13,46	1159	1688	1899	2003	2318	2636	2847	

We draw your attention to the fact that technical characteristics are for reference only, and any person who uses this information should check its relevance, by contacting the technical department: techsales@tmk-group.com

Strength characteristics of pipes with TMK UP CENTUM threaded connection

Nominal pipe diameter	Pipe specific weight	Yield Strength in Tension, kN		Minimum Internal Yield Pressure, MPa		Collapse Pressure, MPa					
		lb/ft	mm	lb/ft	mm	lb/ft	mm				
4 1/2	114,30	379	552	621	655	758	862	931	966	1035	
		55	80	90	95	110	125	135	140	150	150
		784	1142	1285	1355	1568	1783	1926	-	368	537
		6,88 (tubing)	838	1220	1372	1448	1675	-	2058	2135	2287
		737 (tubing)	838	1220	1372	1448	1675	-	2058	2135	2287
		8,56 (tubing)	838	1220	1372	1448	1675	-	2058	2135	2287
		8,56 (tubing)	838	1220	1372	1448	1675	-	2058	2135	2287
		9,65 (tubing)	838	1220	1372	1448	1675	-	2058	2135	2287
		10,92 (tubing)	838	1220	1372	1448	1675	-	2058	2135	2287
		12,70 (tubing)	838	1220	1372	1448	1675	-	2058	2135	2287
5 1/2	139,70	1213	1767	1988	2097	2426	2759	2980	-	367	
		20,00	9,17	1425	2076	2335	2463	2850	3241	3501	-
		23,00	10,54	1621	2361	2656	2801	3242	3687	3962	-
		26,00	12,09	1837	2675	3010	3175	3674	4178	4512	-
		26,80	12,70	1920	2797	3147	3319	3841	4368	4717	-
		28,40	13,46	2023	2947	3315	3496	4046	4601	4970	-
		20,00	7,32	1403	2043	2299	2424	2806	3191	3446	-
		24,00	8,94	1696	2470	2779	2931	3392	3858	4166	-
		28,00	10,59	1988	2896	3258	3436	3977	4522	4884	-
		32,00	12,06	2243	3267	3676	3877	4466	5102	5510	-
6 5/8	168,28	1213	1767	1988	2097	2426	2759	2980	-	367	
		20,00	9,17	1425	2076	2335	2463	2850	3241	3501	-
		23,00	10,54	1621	2361	2656	2801	3242	3687	3962	-
		26,00	12,09	1837	2675	3010	3175	3674	4178	4512	-
		26,80	12,70	1920	2797	3147	3319	3841	4368	4717	-
		28,40	13,46	2023	2947	3315	3496	4046	4601	4970	-
		20,00	7,32	1403	2043	2299	2424	2806	3191	3446	-
		24,00	8,94	1696	2470	2779	2931	3392	3858	4166	-
		28,00	10,59	1988	2896	3258	3436	3977	4522	4884	-
		32,00	12,06	2243	3267	3676	3877	4466	5102	5510	-

We draw your attention to the fact that technical characteristics are for reference only, and any person who uses this information should check its relevance, by contacting the technical department: techsales@tmk-group.com

Strength characteristics of pipes with TMK UP CENTUM threaded connection

TMK UP CENTUM

Nominal pipe diameter	Pipe specific weight	Pipe wall thickness	Yield Strength in Tension, kN						Minimum Internal Yield Pressure, MPa						Collapse Pressure, MPa					
			Minimum yield strength MPa/ksi						Minimum yield strength MPa/ksi						Minimum yield strength MPa/ksi					
mm	lb/ft	mm	379	552	621	655	758	862	931	966	1035	379	552	621	655	758	862	931	966	1035
			55	80	90	95	110	125	135	140	150	55	80	90	95	110	125	135	140	150
	23,00	8,05	1627	2370	2666	2812	3254	3701	3997	-	-	22,5	26,4	27,8	28,6	30,6	32,0	32,6	-	-
	26,00	9,19	1845	2687	3023	3189	3690	4196	4532	-	-	23,8	37,3	39,6	40,5	42,9	44,4	45,4	-	-
7	29,00	10,36	2065	3008	3384	3570	4131	4698	5074	-	-	37,3	48,4	52,2	54,0	58,8	62,8	65,0	-	-
	32,00	11,51	2279	3319	3734	3939	4558	5183	5598	-	-	44,8	59,4	64,7	67,6	74,4	81,3	85,2	-	-
	35,00	12,65	2487	3623	4076	4299	4975	5658	6110	-	-	50,2	70,3	77,1	80,4	89,9	98,8	104,3	-	-
	38,00	13,72	2637	3904	4392	4632	5361	6096	6584	-	-	54,0	78,6	88,4	92,7	104,4	115,6	122,7	-	-
	29,70	9,52	2087	3040	3420	3608	4175	4748	5128	-	-	26,9	33,0	34,7	35,4	36,8	39,1	40,3	-	-
7 5/8	33,70	10,92	2376	3461	3894	4107	4753	5405	5837	-	-	35,1	45,2	48,6	50,2	54,3	57,5	59,2	-	-
	39,00	12,70	2737	3986	4484	4730	5473	6224	6723	-	-	45,6	60,8	66,3	68,9	76,4	83,2	87,3	-	-
	36,00	10,16	2527	3681	4141	4368	5055	5748	6208	-	-	23,8	28,3	29,3	30,0	32,3	34,0	34,7	-	-
8 5/8	40,00	11,43	2826	4116	4630	4884	5652	6427	6942	-	-	30,4	38,1	40,5	41,5	44,1	45,7	46,2	-	-
	44,00	12,70	3121	4545	5113	5393	6242	7098	7666	-	-	36,9	47,9	51,7	53,4	58,1	61,9	63,9	-	-
	36,00	8,94	2507	3652	4108	4333	5014	5702	6159	-	-	14,0	16,4	16,8	17,0	17,1	17,2	17,3	-	-
	40,00	10,03	2800	4078	4588	4839	5600	6368	6878	-	-	17,7	21,3	22,4	22,9	23,9	24,3	24,4	-	-
	43,50	11,05	3071	4473	5032	5308	6142	6985	7544	-	-	22,4	26,3	27,7	28,5	30,5	31,9	32,5	-	-
	47,00	11,99	3319	4834	5438	5736	6638	7549	8153	-	-	26,8	32,8	34,5	35,1	36,5	38,9	40,1	-	-
9 5/8	53,50	13,84	3801	5536	6227	6568	7601	8644	9336	-	-	35,4	45,6	49,1	50,6	54,8	58,1	59,9	-	-
	58,40	15,11	4127	6010	6761	7132	8253	9386	10126	10518	11269	119,9	41	54	59	61	67	73	76	80
	59,40	15,47	4218	6147	6912	7295	8437	9594	10357	10752	11526	103,1	43	57	62	64	71	77	80	85
	64,90	17,07	4622	6732	7573	7988	9244	10512	11342	11781	12622	118,0	49	68	75	78	87	95	100	107
9 7/8	250,83	62,80	4442	6470	7279	7677	8885	10104	10913	-	-	43,0	57,0	62,0	64,3	70,9	76,9	80,3	-	-

We draw your attention to the fact that technical characteristics are for reference only, and any person who uses this information should check its relevance, by contacting the technical department: techsales@tmk-group.com


Strength characteristics of pipes with TMK UP CENTUM threaded connection

Nominal pipe diameter	Pipe specific weight	Pipe wall thickness	Yield Strength in Tension, kN						Minimum Internal Yield Pressure, MPa						Collapse Pressure, MPa								
			Minimum yield strength MPa/ksi						Minimum yield strength MPa/ksi						Minimum yield strength MPa/ksi								
mm	lb/ft	mm	379	552	621	655	758	862	931	966	1035	379	552	621	655	758	862	931	966	1035			
			55	80	90	95	110	125	135	140	150	55	80	90	95	110	125	135	140	150			
	40,50	8,89	2796	4072	4582	4832	5592	6360	6869	-	-	10,9	11,9	12,0	12,1	12,2	12,3	-	-	-			
	45,50	10,16	3180	4632	5211	5496	6360	7233	7812	-	-	14,4	17,1	17,7	17,8	17,9	18,0	18,1	-	-			
10 3/4	51,00	11,43	3560	5186	5834	6153	7121	8098	8746	-	-	18,7	22,2	23,5	24,0	25,2	25,8	25,9	-	-			
	55,50	12,57	3899	5678	6388	6738	7797	8867	9577	-	-	23,4	27,7	28,7	29,6	31,8	33,4	34,1	-	-			
	60,70	13,84	4271	6221	6999	7382	8543	9715	10483	-	-	23,7	35,6	37,6	38,5	40,5	41,9	43,4	-	-			
	65,70	15,11	4641	6759	7604	8020	9281	10555	11399	-	-	33,9	43,5	46,6	48,0	51,7	54,6	56,0	-	-			
12 3/4	323,85	58,78	5089	7556	8456	8856	10256	11711	12622	13132	13842	50,2	70,3	77,1	80,4	89,9	98,8	104,3	-	-			
			54,50	9,65	3792	5524	6214	6554	7585	8626	9316	-	-	7,8	7,9	8,0	8,0	8,1	8,2	8,3	-	-	
	61,00	10,92	4275	6226	7005	7388	8550	9723	10502	-	-	10,6	10,7	10,8	10,8	10,9	11,0	11,1	-	-	-	-	
13 3/8	339,72	68,00	4754	6924	7789	8276	9508	10812	11678	-	-	13,4	15,6	16,0	16,1	16,2	16,3	16,4	-	-	-	-	
			72,00	13,06	5080	7398	8323	8779	10159	11553	12478	-	-	15,4	18,4	19,2	19,5	19,9	20,0	20,1	-	-	-
13 5/8	346,08	88,20	5243	7653	8623	9103	10493	11943	12873	13813	14763	23,2	27,4	28,5	29,4	31,5	33,1	33,8	-	-	-	-	
14	355,60	106,00	5634	8154	9204	9714	11204	12714	13664	14614	15564	27,4	32,0	33,0	34,0	36,3	38,0	38,8	-	-	-	-	


We draw your attention to the fact that technical characteristics are for reference only, and any person who uses this information should check its relevance, by contacting the technical department: techsales@tmk-group.com

PRO SERIES / TMK UP™


Centum ET

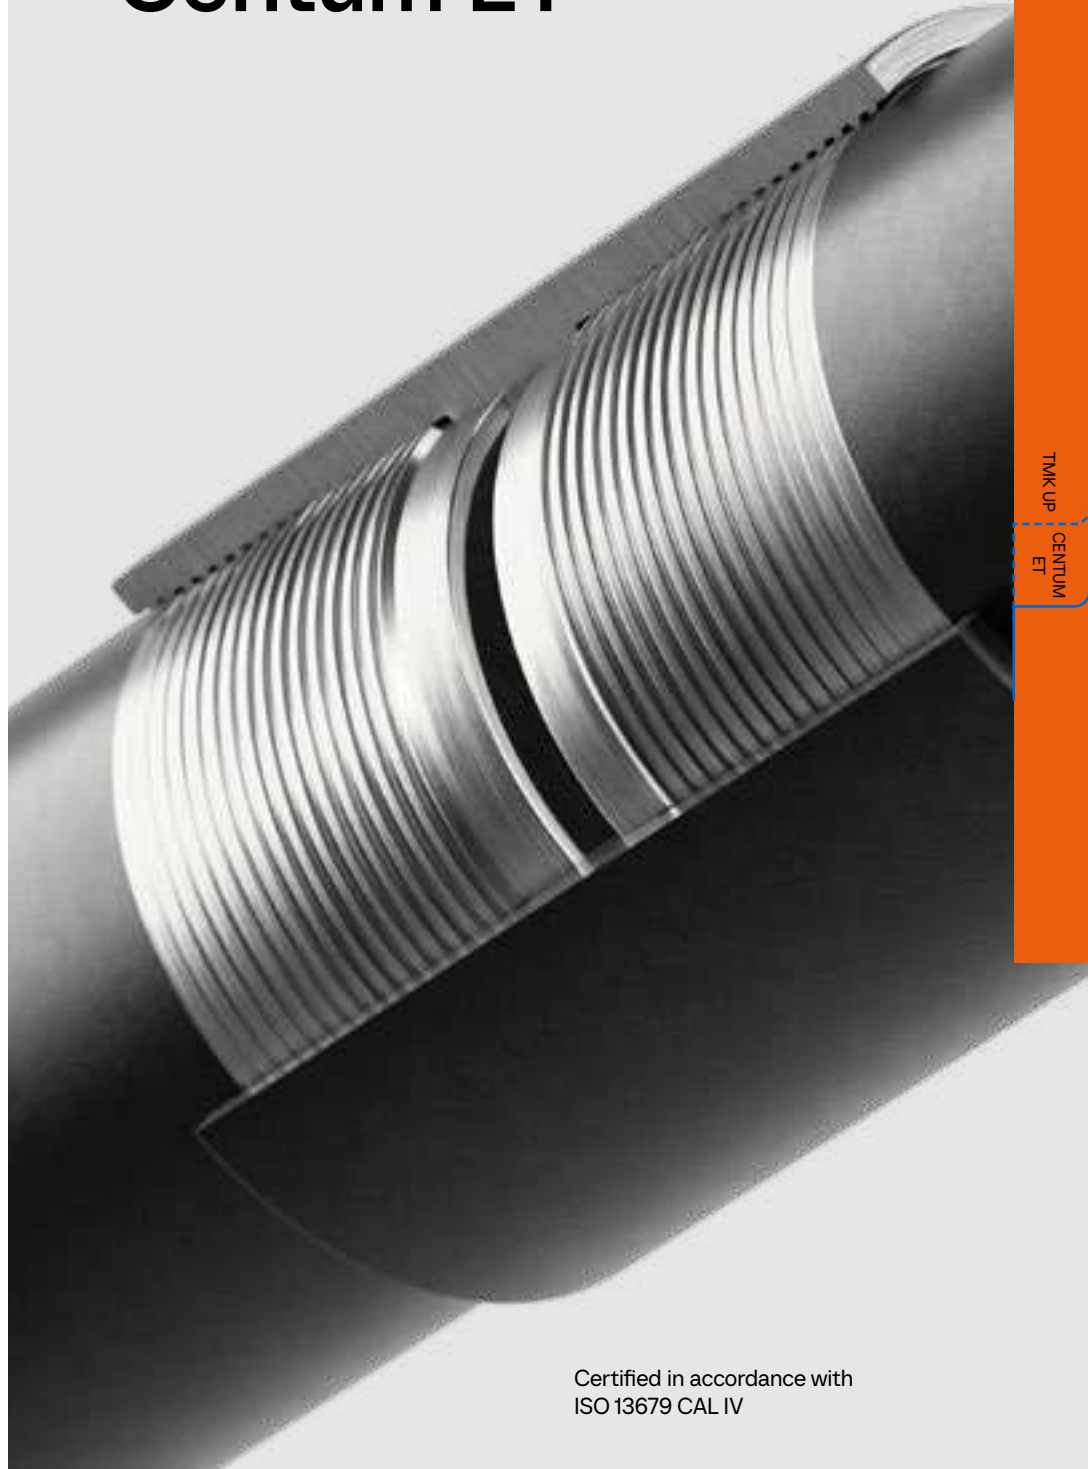

TMK UP
CENTUM
ET

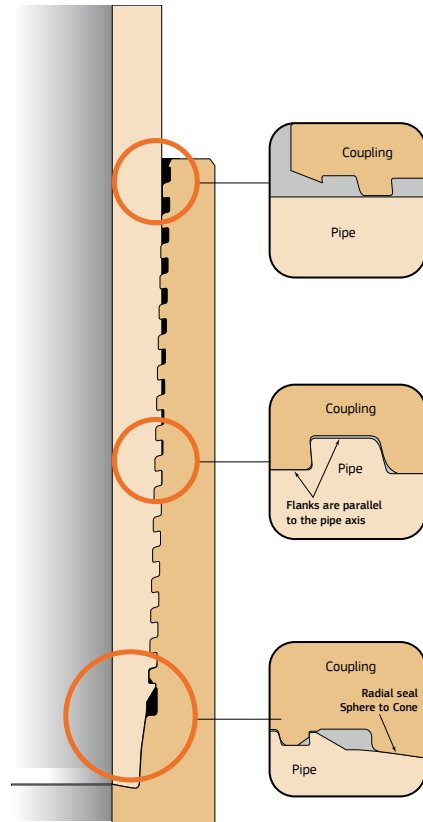

TMK UP CENTUM ET
Performance Envelope

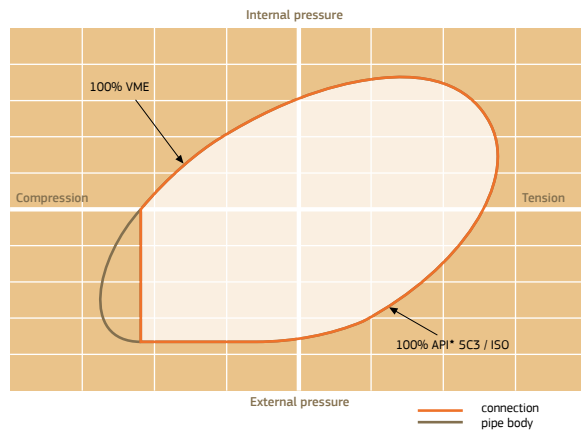

TMK UP CENTUM ET for Casing and Tubing

TMK UP CENTUM ET is threaded and coupled gas-tight connection for casing and tubing. It has 100% efficiency in both compression and tension that allows to use the connection in deep horizontal wells, in particular, in highly deviated wells with large step out and extended horizontal areas. It provides increased operational torque relative to TMK UP CENTUM.

Range:

Tubing 2 3/8"–4 1/2" / 60.32–114.3 mm

Casing 4 1/2"–7" / 114.3–177.8 mm

Unique Feature:

- 100%** compression efficiency
- 100%** tension efficiency
- Gas-tight metal-to-metal seal
- Over-torque protection during make-up
- Increased torque resistance

Application:

- Casing and tubing
- Deviated and horizontal wells, ERD wells
- Gas and oil wells
- RIH with rotation
- Cementing with rotation

Geometrical parameters of pipes with threaded connection TMK UP CENTUM ET



Nominal pipe diameter		Pipe specific weight	Pipe wall thickness	Weight of plain-end pipes	Pipe cross-section area	Coupling C/S area	Special coupling C/S area	Alternative coupling C/S area	Inside diameter of coupling	Outside diameter of coupling	Outside diameter of special coupling	Outside diameter of alternative coupling	Coupling length	Drift diameter	Length makeup loss
in	mm	lb/ft	mm	kg/m	mm ²	mm ²	mm ²	mm ²	mm	mm	mm	mm	mm	mm	mm
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
2 3/8	60.32	4.60	4.83	6.61	842	1407	-	-	50	73.02	-	-	190.0	48.28	83.6
		5.80	6.45	8.57	1092	1407	-	-	47.4	73.02	-	-	190.0	45.04	83.6
		6.60	7.49	9.76	1243	1407	-	-	45.3	73.02	-	-	190.0	42.96	83.6
		7.35	8.53	10.89	1388	1407	-	-	43.3	73.02	-	-	190.0	40.88	83.6
		6.40	5.51	9.17	1169	2147	1377	-	61.4	88.9	83.2	-	210.0	59.62	93.6
		7.80	7.01	11.41	1454	2147	1377	-	59.0	88.9	83.2	-	210.0	56.62	93.6
		8.60	7.82	12.57	1602	2147	1377	-	57.4	88.9	83.2	-	210.0	55.00	93.6
2 7/8	73.02	9.35	8.64	13.72	1748	2147	1377	-	55.7	88.9	83.2	-	210.0	53.36	93.6
		10.50	9.96	15.47	1973	2147	1377	-	53.1	88.9	83.2	-	210.0	50.72	93.6
		11.50	11.18	15.63	2172	2147	1377	-	50.7	88.9	83.2	-	210.0	48.28	93.6
		9.20	6.45	13.12	1671	3148	1545	2158	76.80	108.00	98.10	102.00	210.0	74.74	96.8
		10.20	7.34	14.76	1881	3148	1545	2158	74.30	108.00	98.10	102.00	210.0	71.04	96.8
		12.70	9.52	18.65	2.374	3148	1545	2158	69.90	108.00	98.10	102.00	210.0	66.68	96.8
		14.30	10.92	21.00	2.675	3148	1545	2158	67.10	108.00	98.10	102.00	210.0	63.88	96.8
		15.50	12.09	22.90	2.917	3148	1545	2158	64.80	108.00	98.10	102.00	210.0	61.54	96.8
		9.50	5.74	13.57	1729	3557	1809	-	89.10	120.70	111.10	-	220.0	86.94	101.8
		10.70	6.65	15.57	1.984	3557	1809	-	88.30	120.70	111.10	-	220.0	85.12	101.8
4	101.60	11.35	7.26	17.26	2.152	3557	1809	-	87.10	120.70	111.10	-	220.0	83.90	101.8
		13.20	8.38	19.27	2.454	3557	1809	-	84.90	120.70	111.10	-	220.0	81.66	101.8
		14.71	9.65	22.10	2.788	3557	1809	-	82.30	120.70	111.10	-	220.0	79.12	101.8
		16.10	10.54	23.67	3.015	3557	1809	-	80.60	120.70	111.10	-	220.0	77.34	101.8
		11.60	6.35	16.91	2.154	3973	2048	2674	100.50	133.35	123.82	127.00	250.0	98.42	106.7
		12.60	6.88	18.23	2.322	3973	2048	2674	100.50	133.35	123.82	127.00	250.0	97.36	106.7
		13.50	7.37	19.44	2.476	3973	2048	2674	99.60	133.35	123.82	127.00	250.0	96.38	106.7
		15.10	8.56	22.32	2.844	3973	2048	2674	97.20	133.35	123.82	127.00	250.0	94.00	106.7
4 1/2	114.30	17.00	9.65	24.90	3.173	3973	2048	2674	95.00	133.35	123.82	127.00	250.0	91.82	106.7
		18.90	10.92	27.84	3.547	3973	2048	2674	92.50	133.35	123.82	127.00	250.0	89.28	106.7
		21.50	12.70	31.82	4.054	4289	2048	2674	88.90	134.85	123.82	127.00	250.0	85.72	106.7

Geometrical parameters of pipes with threaded connection TMK UP CENTUM


Nominal pipe diameter		Pipe specific weight	Pipe wall thickness	Weight of plain-end pipes	Pipe cross-section area	Coupling C/S area	Special coupling C/S area	Alternative coupling C/S area	Inside diameter of coupling	Outside diameter of coupling	Outside diameter of special coupling	Outside diameter of alternative coupling	Coupling length	Drift diameter	Length makeup loss
in	mm	lb/ft	mm	kg/m	mm ²	mm ²	mm ²	mm ²	mm	mm	mm	mm	mm	mm	mm
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
5	127.0	15.00	7.52	22.16	2833	4711	2303	-	112.0	147.32	136.52	-	260.0	108.78	122.0
		18.00	9.19	26.70	3401	4711	2303	-	108.6	147.32	136.52	-	260.0	105.44	122.0
		21.40	11.10	31.37	4042	4711	2303	-	104.8	147.32	136.52	-	260.0	101.62	122.0
		23.20	12.14	34.39	4381	4711	2303	-	102.7	147.32	136.52	-	260.0	99.54	122.0
		24.10	12.70	35.80	4506	4711	2303	-	101.6	147.32	136.52	-	260.0	98.42	122.0
		17.00	7.72	25.13	3.201	5167	2544	-	124.30	160.02	149.22	-	260	121.08	122
		20.00	9.17	29.52	3.760	5167	2544	-	121.40	160.02	149.22	-	260	118.18	122
5 1/2	139.70	23.00	10.54	33.57	4.277	5167	2544	-	118.60	160.02	149.22	-	260	115.44	122
		26.00	12.09	38.05	4.847	5167	2544	-	115.50	160.02	149.22	-	260	112.34	122
		26.80	12.70	39.78	5.067	5167	2544	-	114.30	160.02	149.22	-	260	111.12	122
		20.00	7.32	29.06	3.702	5822	2977	-	152.80	187.71	177.80	-	260	150.46	122
6 5/8	168.28	24.00	8.94	35.13	4.475	5822	2977	-	150.40	187.71	177.80	-	260	147.22	122
		28.00	10.59	41.18	5.246	5822	2977	-	147.10	187.71	177.80	-	260	143.92	122
		32.00	12.06	46.46	5.919	5822	2977	-	144.20	187.71	177.80	-	260	140.98	122
		23.00	8.05	33.7	4.293	7097	3230	4024	160.30	200.03	187.32	190.00	280	158.52	131.6
		26.00	9.19	38.21	4.868	7097	3230	4024	159.40	200.03	187.32	190.00	280	156.24	131.6
		29.00	10.36	42.78	5.450	7097	3230	4024	157.10	200.03	187.32	190.00	280	153.9	131.6
		32.00	11.51	47.2	6.013	7097	3230	4024	154.80	200.03	187.32	190.00	280	151.6	131.6
		35.00	12.65	51.52	6.563	7097	3230	4024	152.50	200.03	187.32	190.00	280	149.32	131.6

Strenght characteristics of pipes with TMK UP CENTUM ET


Nominal pipe diameter	Pipe specific weight	Pipe wall thickness	Yield Strength in Tension, kN										Minimum Internal Yield Pressure, MPa										Collapse Pressure, MPa									
			Minimum yield strength MPa/ksi										Minimum yield strength MPa/ksi										Minimum yield strength MPa/ksi									
			379	552	621	655	758	862	931	966	1035	379	552	621	655	758	862	931	966	1035	379	552	621	655	758	862	931	966	1035			
in	mm	mm	55	80	90	95	110	125	135	140	150	150	150	150	150	150	150	150	150	150	150	150	150	150	150	150						
2 3/8	60,32	4.60	319	463	523	552	638	726	783	813	871	531	774	870	91,8	106,2	120,8	130,3	135,4	145,0	56	81	92	97	112	124	132	135	143			
		5.80	414	603	678	715	827	941	1015	1054	1130	70,9	103,3	116,2	122,6	141,8	161,3	174,0	180,8	193,7	73	105	119	125	145	165	178	185	198			
		6.60	479	686	772	814	942	1072	1156	1201	1287	82,9	115,9	134,9	142,3	164,7	187,3	202,1	209,9	224,9	83	120	135	143	165	188	203	210	225			
		7.35	526	766	862	905	1052	1196	1291	1341	1436	93,8	136,6	153,7	162,1	187,6	213,3	230,1	239,1	256,1	92	134	151	159	184	209	226	235	251			
		8.40	544	795	891	934	1090	1234	1329	1380	1485	96,7	139,5	156,6	165,0	192,6	218,3	235,1	244,1	261,1	96	138	155	163	188	213	229	238	254			
		9.50	581	842	938	981	1147	1291	1386	1437	1552	100,6	143,4	160,5	168,9	197,5	223,2	240,0	249,0	266,0	99	141	158	166	191	216	232	241	257			
2 7/8	73,02	8.60	607	884	995	1049	1214	1381	1490	1547	1658	71,0	103,5	116,4	122,8	142,1	161,6	174,3	181,0	194,0	73	106	119	125	145	165	178	185	198			
		9.35	662	965	1085	1149	1325	1506	1625	1688	1809	78,5	114,3	128,6	135,6	157,0	175,3	192,6	200,0	214,3	79	115	130	137	158	180	194	202	216			
		10.50	748	1089	1225	1292	1496	1701	1835	1906	2042	90,5	131,8	148,2	156,3	180,9	205,8	222,0	230,6	247,1	89,4	130	146,3	154,4	178,8	203,2	219,5	227,6	243,8			
		11.50	823	1199	1349	1423	1646	1872	2020	2098	2248	101,5	147,9	166,4	175,5	203,1	231,0	249,2	258,8	277,3	89,4	130	146,3	154,4	178,8	203,2	219,5	227,6	243,8			
		12.70	909	1304	1463	1540	1781	2027	2184	2271	2431	104,4	150,6	170,1	179,2	207,8	236,6	255,4	265,0	283,5	89,4	130	146,3	154,4	178,8	203,2	219,5	227,6	243,8			
3 1/2	88,90	10.20	734	1038	1168	1232	1426	1621	1749	1817	1947	54,8	79,8	89,7	94,6	109,5	124,5	134,4	139,6	149,5	57,5	83,6	94,1	99,3	115,0	130,7	139,2	143,3	151,4			
		13.20	838	1155	1304	1378	1582	1797	1947	2034	2200	57,9	83,6	93,5	98,4	113,3	124,2	134,1	139,2	149,1	57,9	83,6	94,1	99,3	115,0	130,7	139,2	143,3	151,4			
		14.71	965	1339	1504	1578	1802	2037	2202	2289	2475	60,4	86,4	96,3	101,2	116,1	127,0	136,9	141,8	151,7	60,4	86,4	96,3	101,2	116,1	127,0	136,9	141,8	151,7			
		16.10	1054	1443	1624	1708	1942	2197	2372	2469	2665	63,0	91,8	103,2	108,9	126,0	143,3	154,6	160,6	172,0	65,2	94,9	106,7	112,7	130,4	148,2	149,2	160,2	161,2			
		18.90	1202	1611	1802	1886	2130	2402	2592	2693	2899	66,0	94,8	107,2	112,7	129,8	147,1	158,4	164,4	175,8	68,2	97,9	110,7	116,7	135,4	154,2	155,2	166,2	167,2			
		21.50	1344	1802	2002	2096	2350	2642	2842	2943	3149	69,0	97,8	111,2	116,7	133,8	151,1	162,4	168,4	180,8	70,2	100,6	113,4	118,4	137,1	156,0	157,0	168,0	169,0			
		24.10	1506	2002	2202	2296	2550	2842	3042	3143	3349	72,0	100,6	114,0	119,5	136,6	153,9	165,2	171,2	183,6	72,0	100,6	113,4	118,4	137,1	156,0	157,0	168,0	169,0			
		26.60	1682	2202	2402	2496	2750	3042	3242	3343	3549	75,0	103,6	117,0	122,5	139,6	156,9	168,2	174,2	186,6	75,0	103,6	116,4	121,4	140,1	159,0	160,0	171,0	172,0			
		29.20	1868	2402	2602	2696	2950	3242	3442	3543	3749	78,0	106,6	120,0	125,5	142,6	159,9	171,2	177,2	190,6	78,0	106,6	119,4	124,4	143,1	162,0	163,0	174,0	175,0			
		31.80	2064	2602	2802	2896	3150	3442	3642	3743	3949	81,0	109,6	123,0	128,5	145,6	162,9	174,2	180,2	193,6	81,0	109,6	122,4	127,4	146,1	165,0	166,0	177,0	178,0			
		34.40	2270	2802	3002	3096	3350	3642	3842	3943	4149	84,0	112,6	126,0	131,5	148,6	165,9	177,2	183,2	196,6	84,0	112,6	125,4	130,4	149,1	168,0	169,0	180,0	181,0			
		37.00	2486	3002	3202	3296	3550	3842	4042	4143	4349	87,0	115,6	129,0	134,5	151,6	168,9	180,2	186,2	199,6	87,0	115,6	128,4	133,4	152,1	171,0	172,0	183,0	184,0			
		39.60	2702	3202	3402	3496	3750	4042	4242	4343	4549	90,0	118,6	132,0	137,5	154,6	171,9	183,2	189,2	202,6	90,0	118,6	131,4	136,4	155,1	174,0	175,0	186,0	187,0			
		42.20	2928	3402	3602	3696	3950	4242	4442	4543	4749	93,0	121,6	135,0	140,5	157,6	174,9	186,2	192,2	205,6	93,0	121,6	134,4	139,4	158,1	177,0	178,0	189,0	190,0			
		44.80	3154	3602	3802	3896	4150	4442	4642	4743	4949	96,0	124,6	138,0	143,5	160,6	177,9	189,2	195,2	208,6	96,0	124,6	137,4	142,4	161,1	180,0	181,0	192,0	193,0			
		47.40	3380	3802	4002	4096	4350	4642	4842	4943	5149	99,0	127,6	141,0	146,5	163,6	180,9	192,2	198,2	211,6	99,0	127,6	140,4	145,4	164,1	183,0	184,0	195,0	196,0			
		50.00	3606	4002	4202	4296	4550	4842	5042	5143	5349	102,0	130,6	144,0	149,5	166,6	183,9	195,2	201,2	214,6	102,0	130,6	143,4	148,4	167,1	186,0	187,0	198,0	199,0			
		52.60	3832	4202	4402	4496	4750	5042	5242	5343	5549	105,0	133,6	147,0	152,5	169,6	186,9	198,2	204,2	217,6	105,0	133,6	146,4	151,4	170,1	189,0	190,0	201,0	202,0			
		55.20	4058	4402	4602	4696	4950	5242	5442	5543	5749	108,0	136,6	150,0	155,5	172,6	189,9	201,2	207,2	220,6	108,0	136,6	149,4	154,4	173,1	192,0	193,0	204,0	205,0			
		57.80	4284	4602	4802	4896	5150	5442	5642	5743	5949	111,0	139,6	153,0	158,5	175,6	192,9	204,2	210,2	223,6	111,0	139,6	152,4	157,4	176,1	195,0	196,0	207,0	208,0			
		60.40	4510	4802	5002	5096	5350	5642	5842	5943	6149	114,0	142,6	156,0	161,5	178,6	195,9	207,2	213,2	226,6	114,0	142,6	155,4	160,4	179,1	198,0	199,0	210,0	211,0			
		63.00	4736	5002	5202	5296	5550	5842	6042	6143	6349	117,0	145,6	159,0	164,5	181,6	198,9	210,2	216,2	229,6	117,0	145,6	158,4	163,4	182,1	201,0	202,0	213,0	214,0			
		65.60	4962	5202	5402	5496	5750	6042	6242	6343	6549	120,0	148,6	162,0	167,5	184,6	201,9	213,2	219,2	232,6	120,0	148,6	161,4	166,4	185,1	204,0	205,0	216,0	217,0			
		68.20	5188	5402	5602	5696	5950	6242	6442	6543	6749	123,0	151,6	165,0	170,5	187,6	204,9	216,2	222,2	235,6	123,0	151,6	164,4	169,4	188,1	207,0	208,0	219,0	220,0			
		70.80	5414	5602	5802	5896	6150	6442	6642	6743	6949	126,0	154,6	168,0	173,5	190,6	207,9	219,2	225,2	238,6	126,0	154,6	167,4	172,4	191,1	210,0	211,0	222,0	223,0			
		73.40	5640	5802	6002	6096	6350	6642	6842	6943	7149	129,0	157,6	171,0	176,5	193,6	210,9	222,2	228,2	241,6	129,0	157,6	170,4	175,4	194,1	213,0	214,0	225,0	226,0			
		76.00	5866	6002	6202	6296	6550	6842	7042	7143	7349	132,0	160,6	174,0	179,5	196,6	213,9	225,2	231,2	244,6	132,0	160,6	173,4	178,4	197,1	216,0	217,0	228,0	229,0			
		78.60	6092	6202	6402	6496	6750	7042	7242	7343	7549	135,0	163,6	177,0	182,5	199,6	216,9	228,2	234,2	247,6	135,0	163,6	176,4	181,4	200,1	219,0	220,0	231,0	232,0			
		81.20	6318	6402	6602	6696	6950	7242	7442	7543	7749	138,0	166,6	180,0	185,5	202,6	219,9	231,2	237,2	250,6	138,0	166,6	179,4	184,4	203,1	222,0	223,0	234,0	235,0			
		83.80	6544	6602	6802	6896	7150	7442	7642	7743	7949	141,0	169,6	183,0	188,5	205,6	222,9	2														

PRO SERIES / TMK UP™


Centum ET CHS

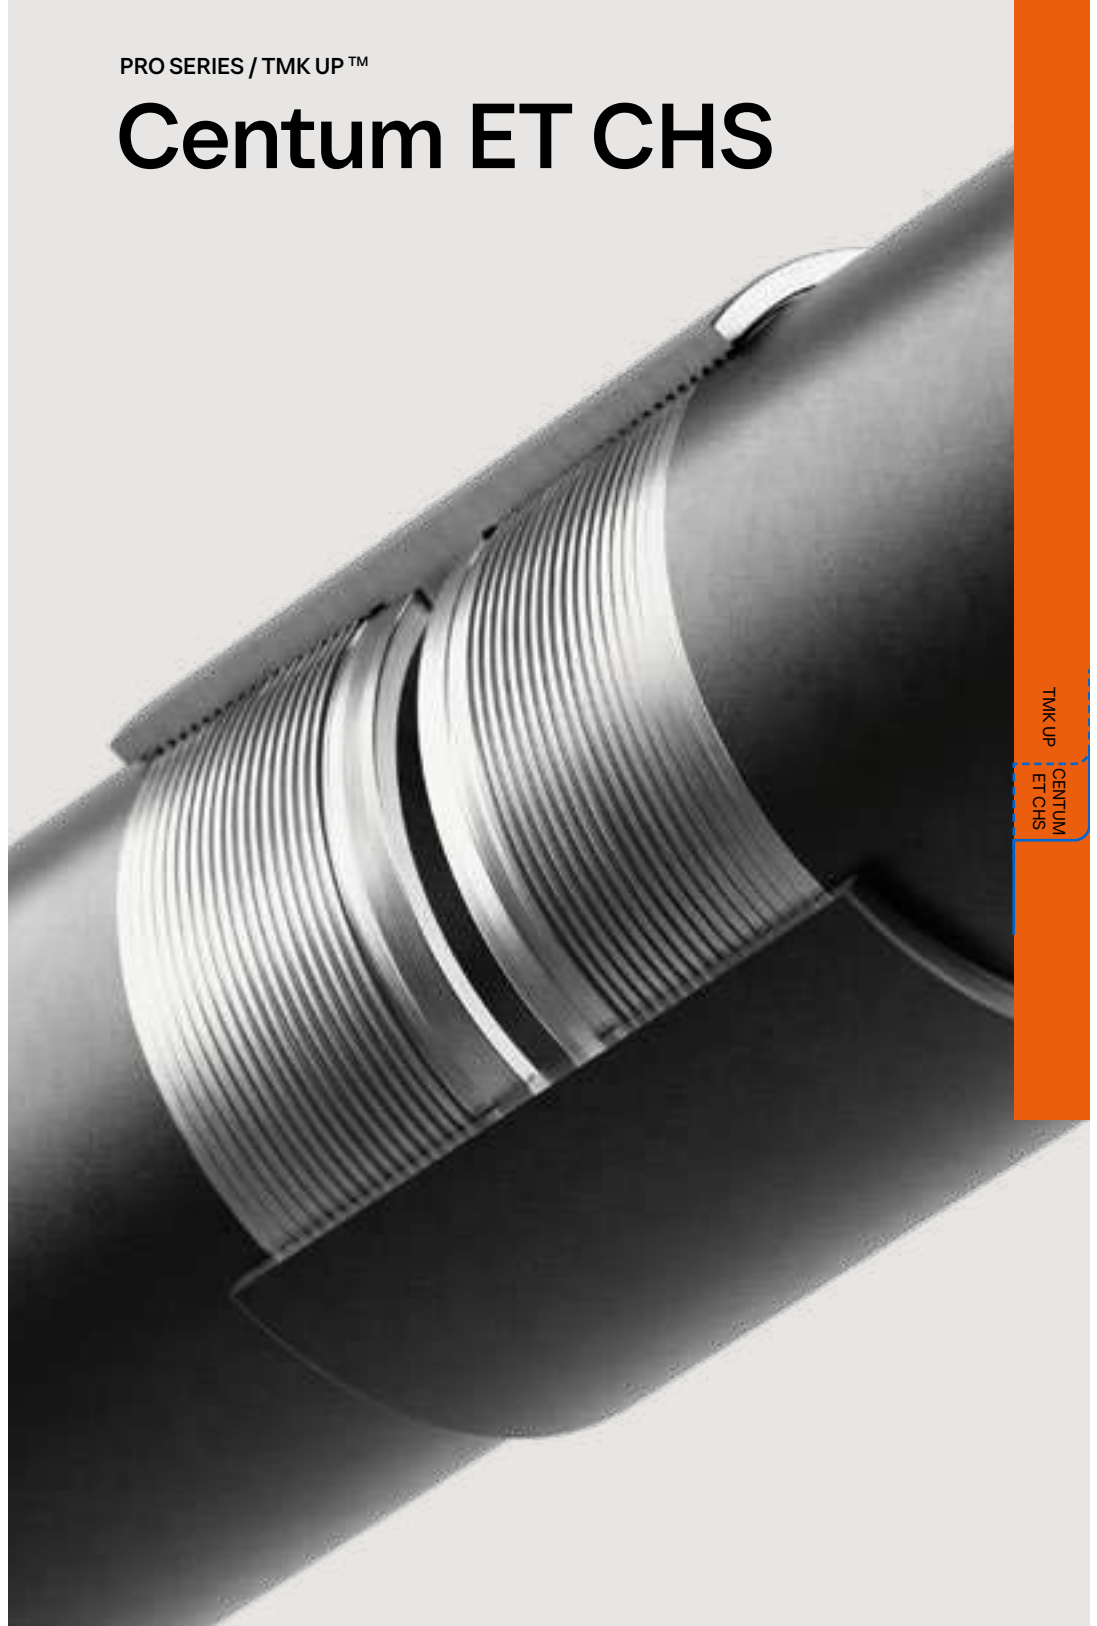

TMK UP
CENTUM
ET CHS

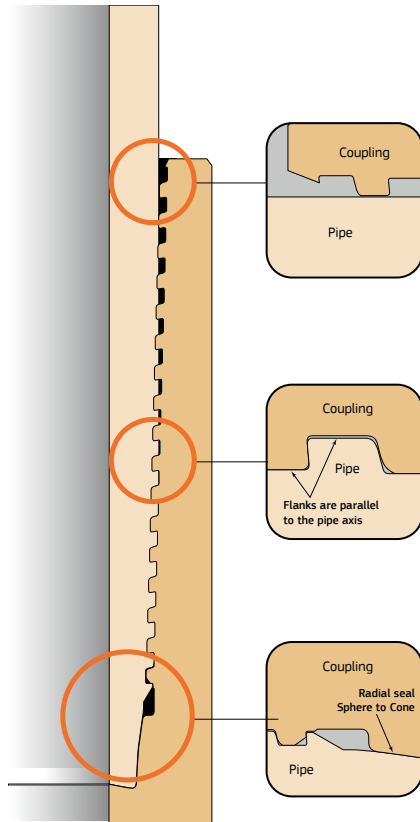

TMK UP CENTUM ET Performance Envelope

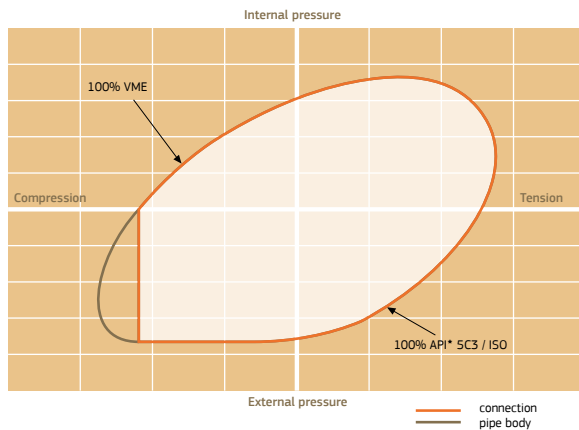

TMK UP CENTUM ET CHS for casing and tubing

TMK UP CENTUM ET CHS is threaded and coupled connection for casing and tubing. It has all advantages of TMK UP CENTUM ET. This connection was developed for CCUS projects (Carbon Capture, Utilization and Storage). Tested under combined loads at minus 60 °C.

Range:

Tubing 3 1/2" / 88,9 mm;
Casing 7" / 177,8 mm

Unique Feature:

- 100%** compression efficiency
- 100%** tension efficiency
- Gas-tight metal-to-metal seal
- Efficiency at extremely low temperatures

Application:

- Casing and tubing
- Gas and oil wells
- CO₂ injection

Nominal pipe diameter		Pipe specific weight	Pipe wall thickness	Weight of plain-end pipes	Pipe cross-section area	Coupling C/S area	Special coupling C/S area	Alternative coupling C/S area	Inside diameter of coupling	Outside diameter of coupling	Outside diameter of special coupling	Outside diameter of alternative coupling	Coupling length	Drift diameter	Length makeup loss
in	mm	lb/ft	mm	kg/m	mm ²	mm ²	mm ²	mm ²	mm	mm	mm	mm	mm	mm	mm
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
3 1/2	88,90	7,70	5,49	11,29	1,439	3,148	1545	2158	76,80	108,00	98,10	102,00	210,0	74,74	96,8
		9,20	6,45	13,12	1,671	3,148	1545	2158	76,00	108,00	98,10	102,00	210,0	72,82	96,8
		10,20	7,34	14,76	1,881	3,148	1545	2158	74,30	108,00	98,10	102,00	210,0	71,04	96,8
		12,70	9,52	18,65	2,374	3,148	1545	2158	69,90	108,00	98,10	102,00	210,0	66,68	96,8
		14,30	10,92	21,00	2,675	3,148	1545	2158	67,10	108,00	98,10	102,00	210,0	63,88	96,8
7	177,80	15,50	12,09	22,90	2,917	3,148	1545	2158	64,80	108,00	98,10	102,00	210,0	61,54	96,8
		23,00	8,05	33,7	4,293	7,097	3230	4024	160,30	200,03	187,32	190,00	280	158,52	131,6
		26,00	9,19	38,21	4,868	7,097	3230	4024	159,40	200,03	187,32	190,00	280	156,24	131,6
		29,00	10,36	42,78	5,450	7,097	3230	4024	157,10	200,03	187,32	190,00	280	153,9	131,6
		32,00	11,51	47,2	6,013	7,097	3230	4024	154,80	200,03	187,32	190,00	280	151,6	131,6
		35,00	12,65	51,52	6,563	7,097	3230	4024	152,50	200,03	187,32	190,00	280	149,32	131,6

We draw your attention to the fact that technical characteristics are for reference only, and any person who uses this information should check its relevance, by contacting the technical department: techsales@tmk-group.com

Streight characteristics of pipes with TMK UP CENTUM ET CHS

Nominal pipe diameter	Pipe specific weight	Pipe wall thickness	Yield Strength in Tension, kN												Minimum Internal Yield Pressure, MPa												Collapse Pressure, MPa																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																															
			Minimum yield strength MPa/ksi												Minimum yield strength MPa/ksi												Minimum yield strength MPa/ksi																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																															
			379	552	621	655	758	862	931	966	1035	379	552	621	655	758	862	931	966	1035	379	552	621	655	758	862	931	966	1035	379	552	621	655	758	862	931	966	1035																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
in	mm	mm	55	80	90	95	110	125	135	140	150	155	164	172	179	187	194	201	208	215	221	228	235	242	249	256	263	270	277	284	291	298	305	312	319	326	333	340	347	354	361	368	375	382	389	396	403	410	417	424	431	438	445	452	459	466	473	480	487	494	501	508	515	522	529	536	543	550	557	564	571	578	585	592	599	606	613	620	627	634	641	648	655	662	669	676	683	690	697	704	711	718	725	732	739	746	753	760	767	774	781	788	795	802	809	816	823	830	837	844	851	858	865	872	879	886	893	900	907	914	921	928	935	942	949	956	963	970	977	984	991	998	1005	1012	1019	1026	1033	1040	1047	1054	1061	1068	1075	1082	1089	1096	1103	1110	1117	1124	1131	1138	1145	1152	1159	1166	1173	1180	1187	1194	1201	1208	1215	1222	1229	1236	1243	1250	1257	1264	1271	1278	1285	1292	1299	1306	1313	1320	1327	1334	1341	1348	1355	1362	1369	1376	1383	1390	1397	1404	1411	1418	1425	1432	1439	1446	1453	1460	1467	1474	1481	1488	1495	1502	1509	1516	1523	1530	1537	1544	1551	1558	1565	1572	1579	1586	1593	1600	1607	1614	1621	1628	1635	1642	1649	1656	1663	1670	1677	1684	1691	1698	1705	1712	1719	1726	1733	1740	1747	1754	1761	1768	1775	1782	1789	1796	1803	1810	1817	1824	1831	1838	1845	1852	1859	1866	1873	1880	1887	1894	1901	1908	1915	1922	1929	1936	1943	1950	1957	1964	1971	1978	1985	1992	1999	2006	2013	2020	2027	2034	2041	2048	2055	2062	2069	2076	2083	2090	2097	2104	2111	2118	2125	2132	2139	2146	2153	2160	2167	2174	2181	2188	2195	2202	2209	2216	2223	2230	2237	2244	2251	2258	2265	2272	2279	2286	2293	2300	2307	2314	2321	2328	2335	2342	2349	2356	2363	2370	2377	2384	2391	2398	2405	2412	2419	2426	2433	2440	2447	2454	2461	2468	2475	2482	2489	2496	2503	2510	2517	2524	2531	2538	2545	2552	2559	2566	2573	2580	2587	2594	2601	2608	2615	2622	2629	2636	2643	2650	2657	2664	2671	2678	2685	2692	2699	2706	2713	2720	2727	2734	2741	2748	2755	2762	2769	2776	2783	2790	2797	2804	2811	2818	2825	2832	2839	2846	2853	2860	2867	2874	2881	2888	2895	2902	2909	2916	2923	2930	2937	2944	2951	2958	2965	2972	2979	2986	2993	3000	3007	3014	3021	3028	3035	3042	3049	3056	3063	3070	3077	3084	3091	3098	3105	3112	3119	3126	3133	3140	3147	3154	3161	3168	3175	3182	3189	3196	3203	3210	3217	3224	3231	3238	3245	3252	3259	3266	3273	3280	3287	3294	3301	3308	3315	3322	3329	3336	3343	3350	3357	3364	3371	3378	3385	3392	3399	3406	3413	3420	3427	3434	3441	3448	3455	3462	3469	3476	3483	3490	3497	3504	3511	3518	3525	3532	3539	3546	3553	3560	3567	3574	3581	3588	3595	3602	3609	3616	3623	3630	3637	3644	3651	3658	3665	3672	3679	3686	3693	3700	3707	3714	3721	3728	3735	3742	3749	3756	3763	3770	3777	3784	3791	3798	3805	3812	3819	3826	3833	3840	3847	3854	3861	3868	3875	3882	3889	3896	3903	3910	3917	3924	3931	3938	3945	3952	3959	3966	3973	3980	3987	3994	4001	4008	4015	4022	4029	4036	4043	4050	4057	4064	4071	4078	4085	4092	4099	4106	4113	4120	4127	4134	4141	4148	4155	4162	4169	4176	4183	4190	4197	4204	4211	4218	4225	4232	4239	4246	4253	4260	4267	4274	4281	4288	4295	4302	4309	4316	4323	4330	4337	4344	4351	4358	4365	4372	4379	4386	4393	4400	4407	4414	4421	4428	4435	4442	4449	4456	4463	4470	4477	4484	4491	4498	4505	4512	4519	4526	4533	4540	4547	4554	4561	4568	4575	4582	4589	4596	4603	4610	4617	4624	4631	4638	4645	4652	4659	4666	4673	4680	4687	4694	4701	4708	4715	4722	4729	4736	4743	4750	4757	4764	4771	4778	4785	4792	4799	4806	4813	4820	4827	4834	4841	4848	4855	4862	4869	4876	4883	4890	4897	4904	4911	4918	4925	4932	4939	4946	4953	4960	4967	4974	4981	4988	4995	5002	5009	5016	5023	5030	5037	5044	5051	5058	5065	5072	5079	5086	5093	5100	5107	5114	5121	5128	5135	5142	5149	5156	5163	5170	5177	5184	5191	5198	5205	5212	5219	5226	5233	5240	5247	5254	5261	5268	5275	5282	5289	5296	5303	5310	5317	5324	5331	5338	5345	5352	5359	5366	5373	5380	5387	5394	5401	5408	5415	5422	5429	5436	5443	5450	5457	5464	5471	5478	5485	5492	5499	5506	5513	5520	5527	5534	5541	5548	5555	5562	5569	5576	5583	5590	5597	5604	5611	5618	5625	5632	5639	5646	5653	5660	5667	5674	5681	5688	5695	5702	5709	5716	5723	5730	5737	5744	5751	5758	5765	5772	5779	5786	5793	5800	5807	5814	5821	5828	5835	5842	5849	5856	5863	5870	5877	5884	5891	5898	5905	5912	5919	5926	5933	5940	5947	5954	5961	5968	5975	5982	5989	5996	6003	6010	6017	6024	6031	6038	6045	6052	6059	6066	6073	6080	6087	6094	6101	6108	6115	6122	6129	6136	6143	6150	6157	6164	6171	6178	6185	6192	6199	6206	6213	6220	6227	6234	6241	6248	6255	6262	6269	6276	6283	6290	6297	6304	6311	6318	6325	6332	6339	6346	6353	6360	6367	6374	6381	6388	6395	6402	6409	6416	6423	6430	6437	6444	6451	6458	6465	6472	6479	6486	6493	6500	6507	6514	6521	6528	6535	6542	6549	6556	6563	6570	6577	6584	6591	6598	6605	6612	6619	6626	6633	6640	6647	6654	6661	6668	6675	6682	6689	6696	6703	6710	6717	6724	6731	6738	6745	6752	6759	6766	6773	6780	6787	6794	6801	6808	6815	6822	6829	6836	6843	6850	6857	6864	6871	6878	6885	6892	6899	6906	6913	6920	6927	6934	6941	6948	6955	6962	6969	6976	6983	6990	6997	7004	7011	7018	7025	7032	7039	7046	7053	7060	7067	7074	7081	7088	7095	7102	7109	7116	7123	7130	7137	7144	7151	7158	7165	7172	7179	7186	7193	7200	7207	7214	7221	7228	7235	7242	7249	7256	7263	7270	7277	7284	7291	7298	7305	

SERIES

Classic


Series of connections which have gas-tight metal-to-metal seal. Provide excellent operational performance in vertical and deviated wells with a low DLS. Higher sealability in reference to standard connections at different operating conditions.

TMK UP™ FMC




CLASSIC SERIES / TMK UP™


FMC

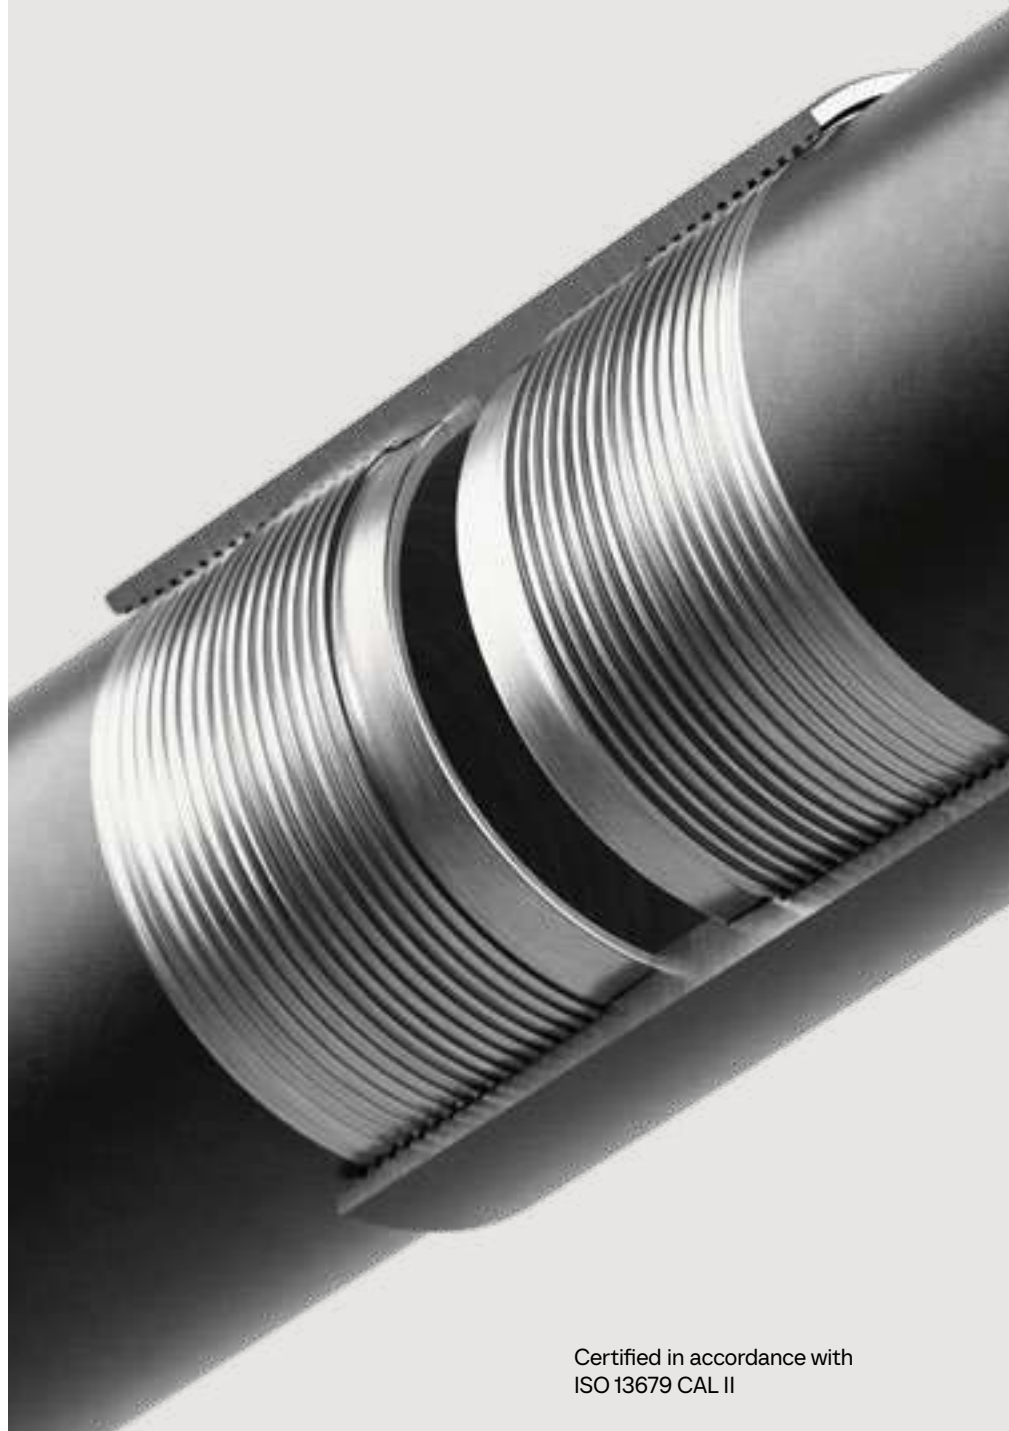

TMK UP FMC

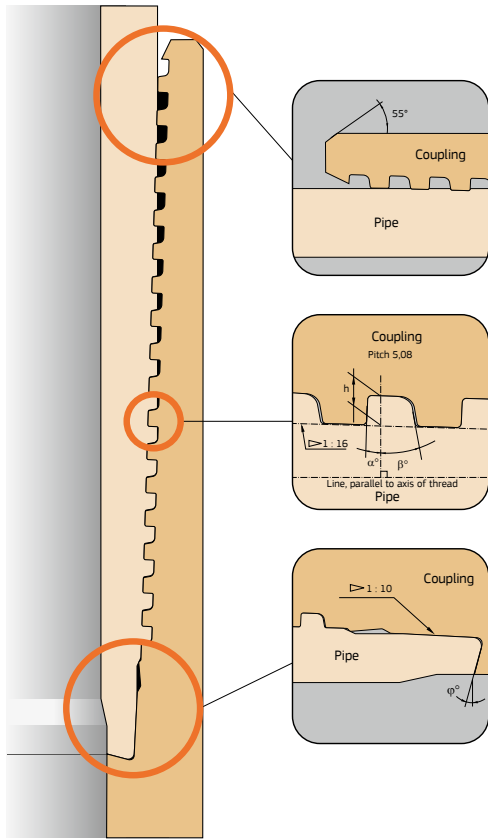

**TMK UP FMC
Performance Envelope**

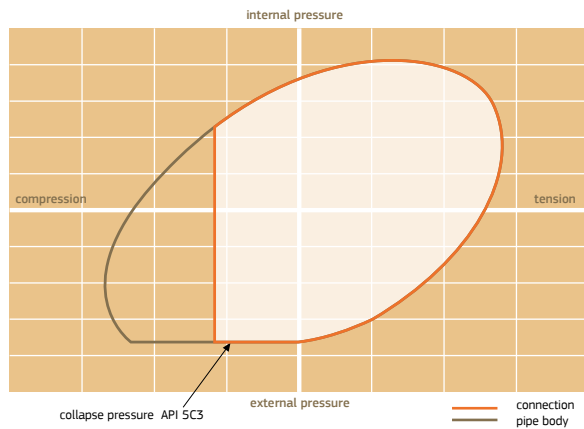

TMK UP FMC for casing

TMK UP FMC is the 1st generation thread connection with metal-to-metal seal for casing in vertical and deviated (with low DLS) wells. Provides higher reliability and operating performance relative to standard connections.

Range:
4 1/2" – 13 3/8" / 114,30 – 339,72 mm

- Unique Feature:**
- 50% compression efficiency
 - 100% tension efficiency
 - Gas-tight metal-to-metal seal
 - Over-torque protection during make-up
 - Robust galling resistance

- Application:**
- Vertical wells
 - Deviated wells
 - Oil and gas wells
 - RIH and cementing with rotation

TMK UP FMC

Geometrical parameters of pipes with threaded connection TMK UP FMC

Nominal pipe diameter	Pipe specific weight	Pipe wall thickness	Weight of plain-end pipes	Removed metal weight (both ends)	Coupling weight		Pipe cross-section area	Critical C/S area of coupling	Critical C/S area of special coupling	Inside diameter of coupling	Outside diameter of coupling	Outside diameter of special coupling	Coupling length	Standard API* drift	Length makeup loss
					Standard	Special									
4 1/2	11,60	6,35	16,91	0,56	5,53	4,35	2,154	2761	2135	100,10	127,00	123,82	240,00	98,42	108,10
	13,50	7,37	19,44	0,57	5,54	4,36	2,476	2761	2135	99,70	127,00	123,82	240,00	96,38	108,10
5	15,10	8,56	22,32	0,62	5,54	4,36	2,844	2761	2135	99,70	127,00	123,82	240,00	94,00	108,10
	17,94	10,20	26,19	0,66	5,6	4,42	3,336	2761	2135	97,70	127,00	123,82	240,00	90,73	108,10
5 1/2	15,00	7,52	22,16	0,68	7,06	5,05	2,823	3446	2403	112,20	141,30	136,52	245,00	108,78	108,70
	18,00	9,19	26,70	0,77	7,06	5,05	3,401	3446	2403	112,20	141,30	136,52	245,00	105,44	108,70
5 3/4	20,63	10,70	30,69	0,79	7,16	5,15	3,909	3446	2403	109,60	141,30	136,52	245,00	102,43	108,70
	15,50	6,98	22,85	0,76	7,55	5,50	2,910	3724	2658	124,80	153,67	149,22	245,00	122,56	110,30
5 1/2	17,00	7,72	25,13	0,78	7,55	5,50	3,201	3724	2658	124,80	153,67	149,22	245,00	121,08	110,30
	20,00	9,17	29,52	0,87	7,55	5,50	3,760	3724	2658	124,80	153,67	149,22	245,00	118,18	110,30
6 5/8	23,00	10,54	33,57	0,91	7,63	5,58	4,277	3724	2658	122,70	153,67	149,22	245,00	115,44	110,30
	16,13	7,00	24,00	0,82	10,8	5,93	3,058	5428	2899	131,20	166,00	156,00	245,00	128,87	110,80
6 5/8	17,81	7,70	26,27	0,82	10,8	5,93	3,347	5428	2899	131,20	166,00	156,00	245,00	127,47	110,80
	19,62	8,50	28,83	0,88	10,8	5,93	3,673	5428	2899	131,20	166,00	156,00	245,00	125,87	110,80
6 5/8	21,50	9,50	31,99	0,95	10,81	5,94	4,075	5428	2899	131,00	166,00	156,00	245,00	123,87	110,80
	23,99	10,70	35,72	0,97	10,89	6,03	4,550	5428	2899	128,90	166,00	156,00	245,00	121,47	110,80
6 5/8	24,00	7,32	29,06	1,02	12,26	6,68	3,702	6113	3268	153,10	187,71	177,80	250,00	150,46	115,00
	24,00	8,94	35,13	1,12	12,26	6,68	4,475	6113	3268	153,10	187,71	177,80	250,00	147,22	115,00
6 5/8	28,00	10,59	41,18	1,21	12,33	6,75	5,246	6113	3268	151,50	187,71	177,80	250,00	143,92	115,00
	32,00	12,06	46,46	1,25	12,43	6,85	5,919	6113	3268	148,90	187,71	177,80	250,00	140,98	115,00

We draw your attention to the fact that technical characteristics are for reference only, and any person who uses this information should check its relevance, by contacting the technical department: techsales@tmk-group.com

We draw your attention to the fact that technical characteristics are for reference only, and any person who uses this information should check its relevance, by contacting the technical department: techsales@tmk-group.com

Geometrical parameters of pipes with threaded connection TMK UP FMC

Nominal pipe diameter	Pipe specific weight	Pipe wall thickness	Weight of plain-end pipes	Removed metal weight (both ends)	Coupling weight		Pipe cross-section area	Critical C/S area of coupling	Critical C/S area of special coupling	Inside diameter of coupling	Outside diameter of coupling	Outside diameter of special coupling	Coupling length	Standard API* drift	Length makeup loss
					Standard	Special									
7	23,00	8,05	33,70	1,22	15,68	7,63	4,293	7395	3528	162,20	200,03	187,32	265,00	158,52	120,60
	26,00	9,19	38,21	1,3	15,68	7,63	4,868	7395	3528	162,20	200,03	187,32	265,00	156,24	120,60
7	29,00	10,36	42,78	1,39	15,71	7,67	5,450	7395	3528	161,50	200,03	187,32	265,00	153,90	120,60
	32,00	11,51	47,20	1,42	15,81	7,77	6,013	7395	3528	159,50	200,03	187,32	265,00	151,60	120,60
7	35,00	12,65	51,52	1,45	15,91	7,87	6,563	7395	3528	157,50	200,03	187,32	265,00	149,32	120,60
	38,00	13,72	55,52	1,49	16,01	7,97	7,072	7395	3528	155,60	200,03	187,32	265,00	147,18	120,60
7 5/8	41,67	15,00	60,22	1,53	16,13	8,09	7,672	7395	3528	153,30	200,03	187,32	265,00	144,62	120,60
	29,70	9,52	43,24	1,57	17,3	10,91	5,508	8109	4952	177,70	215,90	206,38	275,00	171,46	125,40
7 5/8	33,70	10,92	48,22	1,67	17,8	10,98	6,270	8109	4952	176,40	215,90	206,38	275,00	168,66	125,40
	39,00	12,70	56,68	1,73	17,98	11,16	7,221	8109	4952	173,30	215,90	206,38	275,00	165,10	125,40
8 5/8	45,30	15,11	66,54	1,81	18,22	11,41	8,477	8109	4952	169,00	215,90	206,38	275,00	160,28	125,40
	32,00	8,94	46,33	1,8	22,98	12,53	5,902	10405	5655	203,00	244,48	231,78	280,00	198,02	128,50
8 5/8	36,00	10,16	52,35	1,96	22,98	12,53	6,668	10405	5655	203,00	244,48	231,78	280,00	195,58	128,50
	40,00	11,43	58,53	2,03	23,09	12,65	7,456	10405	5655	201,10	244,48	231,78	280,00	193,04	128,50
8 5/8	44,00	12,70	64,64	2,07	23,23	12,79	8,234	10405	5655	198,90	244,48	231,78	280,00	190,50	128,50
	49,00	14,15	71,51	2,13	23,38	12,94	9,110	10405	5655	196,40	244,48	231,78	280,00	187,60	128,50
9 5/8	36,00	8,94	51,93	2,02	27,93	15,55	6,615	11554	6297	228,30	269,88	257,18	300,00	222,63	130,10
	40,00	10,03	57,99	2,17	27,93	15,55	7,388	11554	6297	228,30	269,88	257,18	300,00	220,45	130,10
9 5/8	43,50	11,05	63,61	2,28	28,04	15,66	8,103	11554	6297	227,30	269,88	257,18	300,00	218,41	130,10
	47,00	11,99	68,75	2,31	28,24	15,86	8,757	11554	6297	225,60	269,88	257,18	300,00	216,53	130,10
9 5/8	53,50	13,84	78,72	2,4	28,61	16,23	10,028	11554	6297	222,40	269,88	257,18	300,00	212,83	130,10
	58,40	15,11	85,47	2,46	28,87	16,49	10,888	11554	6297	220,20	269,88	257,18	300,00	210,29	130,10
9 5/8	60,14	15,90	89,63	2,5	29,04	16,65	11,418	11554	6297	218,80	269,88	257,18	300,00	208,71	130,10

Geometrical parameters of pipes with threaded connection TMK UP FMC

TMK UP FMC

Nominal pipe diameter	Pipe specific weight		Pipe wall thickness	Weight of plain-end pipes	Removed metal weight (both ends)	Coupling weight		Pipe cross-section area	Critical C/S area of coupling	Critical C/S area of special coupling	Inside diameter of coupling	Outside diameter of coupling	Outside diameter of special coupling	Coupling length	Standard API* drift	Length makeup loss
	lb/ft	mm				kg	Special									
9 7/8	62,80	15,88	92,01	2,57	2,57	29,75	-	11,721	1869	-	225,30	276,00	-	300,00	215,10	130,10
	66,40	16,79	96,91	2,63	2,63	29,96	-	12,345	1869	-	223,70	276,00	-	300,00	213,28	130,10
10 3/4	72,10	18,29	104,89	2,71	2,71	30,31	-	13,362	1869	-	221,00	276,00	-	300,00	210,28	130,10
	40,50	8,89	57,91	2,26	2,26	31,11	17,39	7,378	12823	6618	256,60	298,45	285,75	300,00	251,30	130,10
12 3/4	45,50	10,16	65,87	2,45	2,45	31,11	17,39	8,391	12823	6618	256,60	298,45	285,75	300,00	248,76	130,10
	51,00	11,43	73,75	2,6	2,6	31,27	17,54	9,394	12823	6618	255,40	298,45	285,75	300,00	246,22	130,10
13 3/8	55,50	12,57	80,75	2,67	2,67	31,5	17,78	10,286	12823	6618	253,60	298,45	285,75	300,00	243,94	130,10
	60,70	13,84	88,47	2,73	2,73	31,8	18,08	11,270	12823	6618	251,30	298,45	285,75	300,00	241,40	130,10
13 3/8	65,70	15,11	96,12	2,74	2,74	32,22	18,50	12,244	12823	6618	248,10	298,45	285,75	300,00	238,86	130,10
	73,20	17,07	107,76	2,87	2,87	32,61	18,89	13,727	12823	6618	245,20	298,45	285,75	300,00	234,94	130,10
13 3/8	50,89	9,50	73,65	2,78	2,78	40,53	-	9,382	16097	-	307,40	351,00	-	310,00	300,88	131,70
	58,78	11,00	84,87	3,12	3,12	40,53	-	10,811	16097	-	307,40	351,00	-	310,00	297,88	131,70
13 3/8	65,13	12,40	95,24	3,23	3,23	40,94	-	12,133	16097	-	305,10	351,00	-	310,00	295,08	131,70
	72,87	14,00	106,98	3,33	3,33	41,46	-	13,628	16097	-	302,30	351,00	-	310,00	291,88	131,70
13 3/8	54,50	9,65	78,55	2,93	2,93	40,19	-	10,007	15853	-	323,30	365,12	-	310,00	316,45	131,70
	61,00	10,92	88,55	3,24	3,24	40,19	-	11,280	15853	-	323,30	365,12	-	310,00	313,91	131,70
13 3/8	68,00	12,19	98,46	3,38	3,38	40,56	-	12,543	15853	-	321,50	365,12	-	310,00	313,37	131,70
	72,00	13,06	105,21	3,44	3,44	40,86	-	13,403	15853	-	320,00	365,12	-	310,00	309,63	131,70

We draw your attention to the fact that technical characteristics are for reference only, and any person who uses this information should check its relevance, by contacting the technical department: techsales@tmk-group.com

We draw your attention to the fact that technical characteristics are for reference only, and any person who uses this information should check its relevance, by contacting the technical department: techsales@tmk-group.com

Streight characteristics of pipes with threaded connection TMK UP FMC

Nominal pipe diameter	Pipe specific weight	Pipe wall thickness	Yield Strength in Tension, kN												Minimum Internal Yield Pressure, MPa												Collapse Pressure, MPa																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																		
			Minimum yield strength MPa/ksi						Minimum yield strength MPa/ksi						Minimum yield strength MPa/ksi						Minimum yield strength MPa/ksi						Minimum yield strength MPa/ksi																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																		
			379	562	621	655	758	862	931	966	1035	1035	966	1035	379	562	621	655	758	862	931	966	1035	1035	966	1035	621	655	758	862	931	966	1035	1035	966	1035	966	1035																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																							
in	mm	mm	55	80	90	95	110	125	135	140	150	155	160	165	170	175	180	185	190	195	200	205	210	215	220	225	230	235	240	245	250	255	260	265	270	275	280	285	290	295	300	305	310	315	320	325	330	335	340	345	350	355	360	365	370	375	380	385	390	395	400	405	410	415	420	425	430	435	440	445	450	455	460	465	470	475	480	485	490	495	500	505	510	515	520	525	530	535	540	545	550	555	560	565	570	575	580	585	590	595	600	605	610	615	620	625	630	635	640	645	650	655	660	665	670	675	680	685	690	695	700	705	710	715	720	725	730	735	740	745	750	755	760	765	770	775	780	785	790	795	800	805	810	815	820	825	830	835	840	845	850	855	860	865	870	875	880	885	890	895	900	905	910	915	920	925	930	935	940	945	950	955	960	965	970	975	980	985	990	995	1000	1005	1010	1015	1020	1025	1030	1035	1040	1045	1050	1055	1060	1065	1070	1075	1080	1085	1090	1095	1100	1105	1110	1115	1120	1125	1130	1135	1140	1145	1150	1155	1160	1165	1170	1175	1180	1185	1190	1195	1200	1205	1210	1215	1220	1225	1230	1235	1240	1245	1250	1255	1260	1265	1270	1275	1280	1285	1290	1295	1300	1305	1310	1315	1320	1325	1330	1335	1340	1345	1350	1355	1360	1365	1370	1375	1380	1385	1390	1395	1400	1405	1410	1415	1420	1425	1430	1435	1440	1445	1450	1455	1460	1465	1470	1475	1480	1485	1490	1495	1500	1505	1510	1515	1520	1525	1530	1535	1540	1545	1550	1555	1560	1565	1570	1575	1580	1585	1590	1595	1600	1605	1610	1615	1620	1625	1630	1635	1640	1645	1650	1655	1660	1665	1670	1675	1680	1685	1690	1695	1700	1705	1710	1715	1720	1725	1730	1735	1740	1745	1750	1755	1760	1765	1770	1775	1780	1785	1790	1795	1800	1805	1810	1815	1820	1825	1830	1835	1840	1845	1850	1855	1860	1865	1870	1875	1880	1885	1890	1895	1900	1905	1910	1915	1920	1925	1930	1935	1940	1945	1950	1955	1960	1965	1970	1975	1980	1985	1990	1995	2000	2005	2010	2015	2020	2025	2030	2035	2040	2045	2050	2055	2060	2065	2070	2075	2080	2085	2090	2095	2100	2105	2110	2115	2120	2125	2130	2135	2140	2145	2150	2155	2160	2165	2170	2175	2180	2185	2190	2195	2200	2205	2210	2215	2220	2225	2230	2235	2240	2245	2250	2255	2260	2265	2270	2275	2280	2285	2290	2295	2300	2305	2310	2315	2320	2325	2330	2335	2340	2345	2350	2355	2360	2365	2370	2375	2380	2385	2390	2395	2400	2405	2410	2415	2420	2425	2430	2435	2440	2445	2450	2455	2460	2465	2470	2475	2480	2485	2490	2495	2500	2505	2510	2515	2520	2525	2530	2535	2540	2545	2550	2555	2560	2565	2570	2575	2580	2585	2590	2595	2600	2605	2610	2615	2620	2625	2630	2635	2640	2645	2650	2655	2660	2665	2670	2675	2680	2685	2690	2695	2700	2705	2710	2715	2720	2725	2730	2735	2740	2745	2750	2755	2760	2765	2770	2775	2780	2785	2790	2795	2800	2805	2810	2815	2820	2825	2830	2835	2840	2845	2850	2855	2860	2865	2870	2875	2880	2885	2890	2895	2900	2905	2910	2915	2920	2925	2930	2935	2940	2945	2950	2955	2960	2965	2970	2975	2980	2985	2990	2995	3000	3005	3010	3015	3020	3025	3030	3035	3040	3045	3050	3055	3060	3065	3070	3075	3080	3085	3090	3095	3100	3105	3110	3115	3120	3125	3130	3135	3140	3145	3150	3155	3160	3165	3170	3175	3180	3185	3190	3195	3200	3205	3210	3215	3220	3225	3230	3235	3240	3245	3250	3255	3260	3265	3270	3275	3280	3285	3290	3295	3300	3305	3310	3315	3320	3325	3330	3335	3340	3345	3350	3355	3360	3365	3370	3375	3380	3385	3390	3395	3400	3405	3410	3415	3420	3425	3430	3435	3440	3445	3450	3455	3460	3465	3470	3475	3480	3485	3490	3495	3500	3505	3510	3515	3520	3525	3530	3535	3540	3545	3550	3555	3560	3565	3570	3575	3580	3585	3590	3595	3600	3605	3610	3615	3620	3625	3630	3635	3640	3645	3650	3655	3660	3665	3670	3675	3680	3685	3690	3695	3700	3705	3710	3715	3720	3725	3730	3735	3740	3745	3750	3755	3760	3765	3770	3775	3780	3785	3790	3795	3800	3805	3810	3815	3820	3825	3830	3835	3840	3845	3850	3855	3860	3865	3870	3875	3880	3885	3890	3895	3900	3905	3910	3915	3920	3925	3930	3935	3940	3945	3950	3955	3960	3965	3970	3975	3980	3985	3990	3995	4000	4005	4010	4015	4020	4025	4030	4035	4040	4045	4050	4055	4060	4065	4070	4075	4080	4085	4090	4095	4100	4105	4110	4115	4120	4125	4130	4135	4140	4145	4150	4155	4160	4165	4170	4175	4180	4185	4190	4195	4200	4205	4210	4215	4220	4225	4230	4235	4240	4245	4250	4255	4260	4265	4270	4275	4280	4285	4290	4295	4300	4305	4310	4315	4320	4325	4330	4335	4340	4345	4350	4355	4360	4365	4370	4375	4380	4385	4390	4395	4400	4405	4410	4415	4420	4425	4430	4435	4440	4445	4450	4455	4460	4465	4470	4475	4480	4485	4490	4495	4500	4505	4510	4515	4520	4525	4530	4535	4540	4545	4550	4555	4560

Nominal pipe diameter	Pipe specific weight	Pipe wall thickness	Yield Strength in Tension, kN											Minimum Internal Yield Pressure, MPa											Collapse Pressure, MPa										
			Minimum yield strength MPa/ksi											Minimum yield strength MPa/ksi											Minimum yield strength MPa/ksi										
in	lb/ft	mm	379	562	621	655	758	862	931	966	1035	1035	379	562	621	655	758	862	931	966	1035	1035	379	562	621	655	758	862	931	966	1035	1035			
			55	80	90	95	110	125	135	140	150	150	55	80	90	95	110	125	135	140	150	150	55	80	90	95	110	125	135	140	150				
7	23.00	8.05	1627	2370	2666	2812	3254	3701	3997	4147	4443	30.0	43.7	49.2	51.9	60.1	68.3	73.8	76.5	82.0	22.5	26.4	27.8	28.6	30.6	32.0	32.6	32.8	33.0	33.0					
			26.00	1845	2687	3023	3189	3690	4196	4532	4702	5038	34.3	49.9	56.2	59.2	68.6	78.0	84.2	87.4	93.6	29.8	37.3	39.6	40.5	42.9	44.4	45.4	46.1	47.4	47.4				
7 5/8	29.00	10.36	2075	3008	3384	3570	4131	4698	5074	5183	5598	5809	6223	42.9	62.5	70.4	74.2	85.9	97.7	105.5	109.4	115.3	137.3	148.4	152.2	154.0	158.8	162.8	165.0	165.9	167.5				
			35.00	2487	3623	4076	4299	4975	5658	610	6340	6793	47.2	68.7	77.3	81.6	94.4	107.3	115.9	120.3	128.9	150.2	170.3	177.1	180.4	189.9	198.8	204.3	206.9	212.0	212.0				
8 5/8	38.00	13.72	2680	3904	4392	4632	5361	6096	6584	6832	7320	51.2	74.5	83.9	88.5	102.4	116.4	125.7	130.4	139.8	154.0	178.6	188.4	192.7	204.4	215.6	222.7	226.1	227.7	232.7	232.7				
			41.67	2803	4082	4592	4844	5605	6374	6885	7144	7654	56.0	81.5	91.7	96.7	111.9	127.3	137.5	142.6	152.8	168.6	185.3	195.9	201.3	217.3	233.3	243.9	249.0	257.6	257.6				
9 5/8	47.00	11.99	3370	5041	5608	5847	6753	7540	8037	8481	8800	61.9	89.4	100.5	105.5	121.1	139.1	141.3	141.3	154.6	179.4	189.3	194.3	206.5	217.9	225.3	232.7	237.7	238.3	239.9	239.9				
			39.00	4273	5986	6648	7030	8074	8990	9549	10085	10630	66.6	95.9	108.1	113.1	130.3	149.3	151.5	151.5	166.8	193.6	204.5	210.5	222.7	232.7	240.9	248.3	253.3	257.3	257.3				
10 3/4	55.50	13.84	4350	6300	7030	7330	8330	9330	9930	10430	10830	71.7	103.3	117.3	122.3	141.3	161.3	163.3	163.3	183.3	213.3	223.3	228.3	240.3	250.3	257.3	262.3	267.3	270.3	270.3	270.3				
			60.14	5207	7207	7807	8807	9807	10407	10907	11407	11807	76.4	111.4	126.4	131.4	151.4	171.4	173.4	173.4	193.4	223.4	233.4	238.4	250.4	260.4	267.4	272.4	277.4	280.4	280.4				
12 3/4	68.00	15.11	5350	7700	8600	8900	10200	11400	12000	12500	12900	83.3	121.3	138.3	143.3	163.3	183.3	185.3	185.3	205.3	235.3	245.3	250.3	262.3	272.3	279.3	284.3	289.3	292.3	292.3	292.3				
			72.00	8498	9652	10000	11400	12800	13400	13900	14400	14900	88.0	128.0	145.0	150.0	170.0	190.0	192.0	192.0	212.0	242.0	252.0	257.0	269.0	279.0	286.0	291.0	296.0	299.0	299.0				

We draw your attention to the fact that technical characteristics are for reference only, and any person who uses this information should check its relevance, by contacting the technical department: techsales@tmk-group.com

We draw your attention to the fact that technical characteristics are for reference only, and any person who uses this information should check its relevance, by contacting the technical department: techsales@tmk-group.com

Streight characteristics of pipes with threaded connection TMK UP FMC

Nominal pipe diameter	Pipe specific weight	Pipe wall thickness	Yield Strength in Tension, kN											Minimum Internal Yield Pressure, MPa											Collapse Pressure, MPa										
			Minimum yield strength MPa/ksi											Minimum yield strength MPa/ksi											Minimum yield strength MPa/ksi										
in	lb/ft	mm	379	562	621	655	758	862	931	966	1035	1035	379	562	621	655	758	862	931	966	1035	1035	379	562	621	655	758	862	931	966	1035				
			55	80	90	95	110	125	135	140	150	150	55	80	90	95	110	125	135	140	150	150	55	80	90	95	110	125	135	140	150				
9 7/8	62.80	15.88	4442	6470	7279	7677	8885	10104	10913	11323	12132	42.0	61.2	68.8	72.6	84.0	95.5	103.1	107.0	114.7	143.0	157.0	162.0	164.3	171.0	176.9	180.4	182.0	184.9	184.9					
			66.40	16.79	4498	6552	7371	7774	8997	10231	11050	11465	44.4	64.7	72.7	76.7	88.8	101.0	109.1	113.2	121.2	147.1	163.1	168.0	171.8	179.7	187.0	191.4	193.5	197.4					
10 3/4	55.50	13.84	4350	6300	7030	7330	8330	9330	9930	10430	10830	71.7	103.3	117.3	122.3	141.3	161.3	163.3	163.3	183.3	213.3	223.3	228.3	240.3	250.3	257.3	262.3	267.3	270.3	270.3					
			60.14	5207	7207	7807	8807	9807	10407	10907	11407	11807	76.4	111.4	126.4	131.4	151.4	171.4	173.4	173.4	193.4	223.4	233.4	238.4	250.4	260.4	267.4	272.4	277.4	280.4	280.4				
12 3/4	68.00	15.11	5350	7700	8600	8900	10200	11400	12000	12500	12900	83.3	121.3	138.3	143.3	163.3	183.3	185.3	185.3	205.3	235.3	245.3	250.3	262.3	272.3	279.3	284.3	289.3	292.3	292.3	292.3				
			72.00	8498	9652	10000	11400	12800	13400	13900	14400	14900	88.0	128.0	145.0	150.0	170.0	190.0	192.0	192.0	212.0	242.0	252.0	257.0	269.0	279.0	286.0	291.0	296.0	299.0	299.0				

SERIES

Lite

Series of connections, which have modified standard thread and higher performance characteristics in reference to connections of standard API* 5CT. Connection configuration provides exact and quick assembly, and internal shoulder can take torsion and compression loads.

TMK UP™ SIMPLEX



TMK UP™ CWB



TMK UP™ CWB II




TMK UP™ MAGNA




LITE SERIES / TMK UP™


Simplex

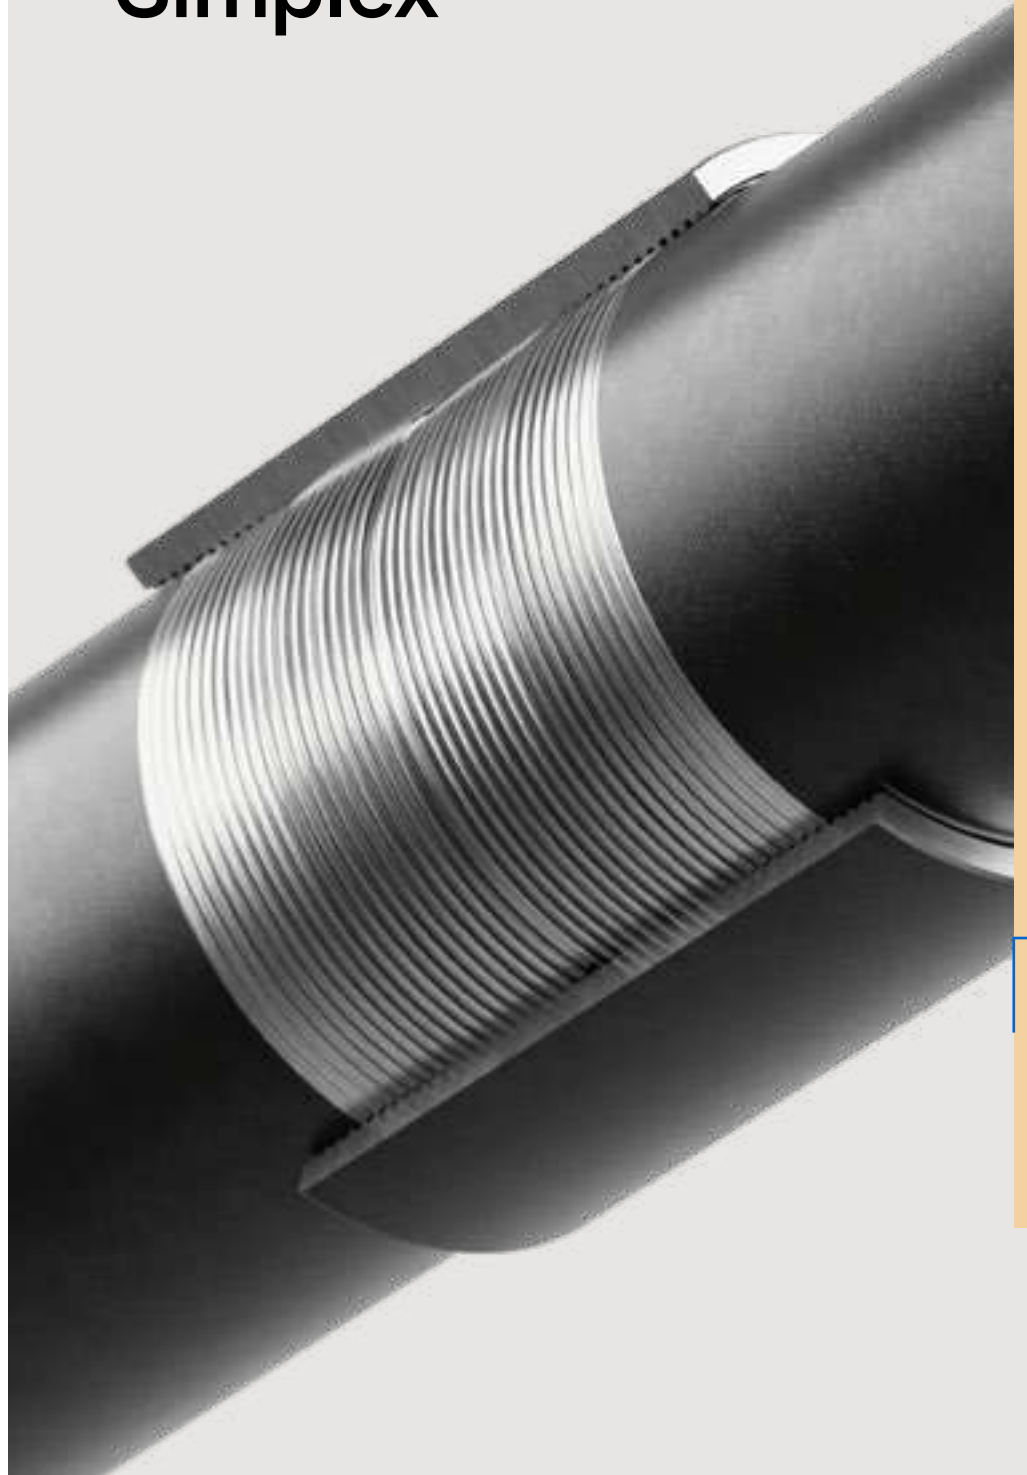

TMK UP SIMPLEX

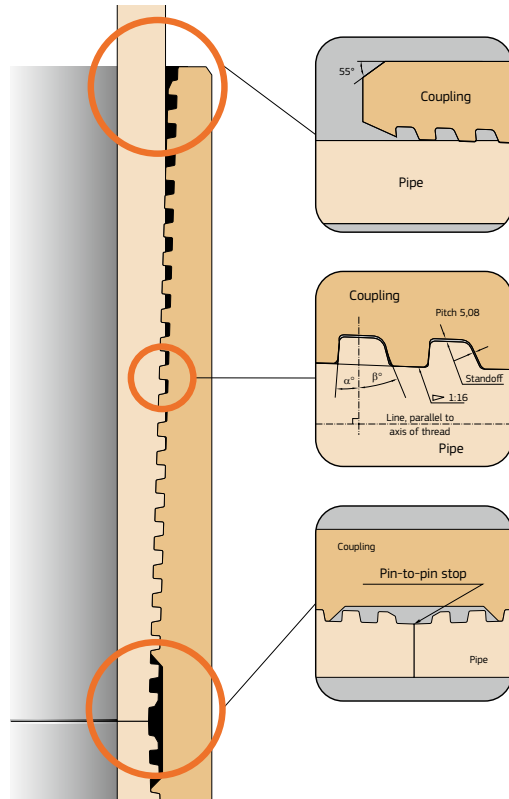

TMK UP SIMPLEX Performance Envelope

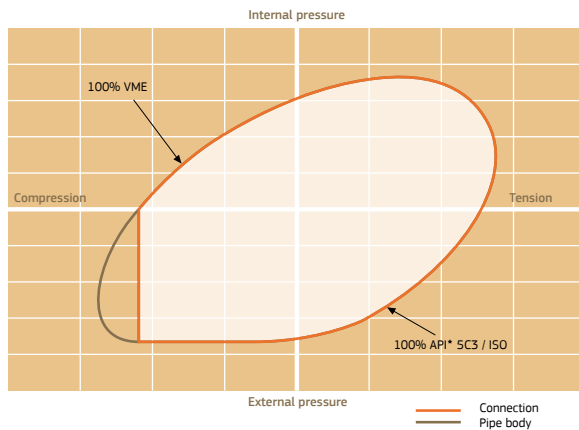

TMK UP SIMPLEX for Casing

TMK UP Simplex – threaded and coupled connection with increased performance characteristics in reference to Buttress thread. Designed with an internal pin-to-pin stop for 100%** compression efficiency and torsional stability. The connection is designed for casing rotation during run-in-hole operation and cementing.

Range: 4 1/2"–13 3/8 " / 114.30–339.72 mm

Unique Feature:

- 100%** compression efficiency
- 100%** tension efficiency
- Pin-to-pin shoulder
- Sealability through thread compound
- Over-torque protection during make-up
- Additional sealing barrier
- Compatibility with API Buttress without crossovers
- Prevention from coupling's internal surface erosion

Application:

- Vertical wells
- Deviated wells
- Horizontal oil wells
- RIH with rotation
- Cementing with rotation
- Low GOR wells

Nominal pipe diameter	Pipe specific weight	Pipe wall thickness	Weight of plain-end pipes	Removed metal weight (both ends)	Coupling weight		Pipe cross-section area	Critical C/S area of special coupling	Critical C/S area of special coupling	Inside diameter of connection	Outside diameter of coupling	Outside diameter of special coupling	Coupling length	Standard API* drift	Length makeup loss
					Standard	Special									
4 1/2	11,60	6,35	16,91	0,34	4,10	-	2,154	2781	-	101,60	127,00	-	200,00	98,42	100,00
	13,50	7,37	19,44	0,34	4,10	-	2,476	2781	-	99,56	127,00	-	200,00	96,38	100,00
5	15,10	8,56	22,32	0,36	4,10	-	2,844	2781	-	97,18	127,00	-	200,00	94,00	100,00
	13,00	6,43	19,12	0,40	5,66	-	2,436	3466	-	114,14	141,30	-	206,40	110,96	103,20
5 1/2	15,00	7,52	22,16	0,41	5,66	4,40	2,823	3466	-	111,96	141,30	139,00	206,40	108,78	103,20
	18,00	9,19	26,70	0,42	5,66	-	3,401	3466	-	108,62	141,30	-	206,40	105,44	103,20
5 3/4	21,40	11,10	31,73	0,43	5,66	-	4,042	3466	-	104,80	141,30	-	206,40	101,62	103,20
	23,20	12,14	34,39	0,43	5,66	-	4,381	3466	-	102,72	141,30	-	206,40	99,54	103,20
6 5/8	24,10	12,70	35,80	0,43	5,66	-	4,560	3466	-	101,60	141,30	-	206,40	98,42	103,20
	15,50	6,98	22,85	0,46	6,24	-	2,910	3739	-	125,74	153,67	-	210,00	122,56	104,80
7	17,00	7,72	25,13	0,46	6,24	-	3,201	3739	-	124,26	153,67	-	210,00	121,08	104,80
	20,00	9,17	29,52	0,47	6,24	-	3,760	3739	-	121,36	153,67	-	210,00	118,18	104,80
7 1/2	23,00	10,54	33,57	0,48	6,24	-	4,277	3739	-	118,62	153,67	-	210,00	115,44	104,80
	16,14	7,00	24,00	0,52	8,80	-	3,058	5454	-	132,05	166,00	-	213,00	128,87	106,40
7 3/4	17,68	7,70	26,27	0,52	8,80	-	3,347	5454	-	130,65	166,00	-	213,00	127,47	106,40
	19,62	8,50	28,83	0,53	8,80	-	3,673	5454	-	129,05	166,00	-	213,00	125,87	106,40
8 1/2	21,51	9,50	31,99	0,53	8,80	-	4,075	5454	-	127,05	166,00	-	213,00	123,87	106,40
	24,01	10,70	35,72	0,54	8,80	-	4,550	5454	-	124,65	166,00	-	213,00	121,47	106,40
9 1/2	20,00	7,32	29,06	0,66	10,00	-	3,702	6135	-	153,64	187,71	-	219,20	150,46	109,50
	21,25	8,00	31,62	0,66	10,00	-	4,028	6135	-	152,28	187,71	-	219,20	149,10	109,50
10 3/4	24,00	8,94	35,13	0,66	10,00	-	4,475	6135	-	150,40	187,71	-	219,20	147,22	109,50
	28,00	10,59	41,18	0,67	10,00	-	5,246	6135	-	147,10	187,71	-	219,20	143,92	109,50
11 1/4	32,00	12,06	46,46	0,67	10,00	-	5,919	6135	-	144,16	187,71	-	219,20	140,98	109,50

We draw your attention to the fact that technical characteristics are for reference only, and any person who uses this information should check its relevance, by contacting the technical department: techsales@tmk-group.com

We draw your attention to the fact that technical characteristics are for reference only, and any person who uses this information should check its relevance, by contacting the technical department: techsales@tmk-group.com

Geometrical parameters of pipes with threaded connection TMK UP Simplex

Nominal pipe diameter	Pipe specific weight	Pipe wall thickness	Weight of plain-end pipes	Removed metal weight (both ends)	Coupling weight		Pipe cross-section area	Critical C/S area of special coupling	Critical C/S area of special coupling	Inside diameter of connection	Outside diameter of coupling	Outside diameter of special coupling	Coupling length	Standard API* drift	Length makeup loss
					Standard	Special									
7	23,00	8,05	33,70	0,79	12,65	-	4,293	7424	-	161,70	200,03	-	229,00	158,52	114,30
	26,00	9,19	38,21	0,79	12,65	-	4,868	7424	-	159,42	200,03	-	229,00	156,24	114,30
7 1/2	29,00	10,36	42,78	0,79	12,65	-	5,450	7424	-	157,08	200,03	-	229,00	153,90	114,30
	32,00	11,51	47,20	0,79	12,65	-	6,013	7424	-	154,78	200,03	-	229,00	151,60	114,30
7 3/4	35,00	12,65	51,52	0,80	12,65	-	6,563	7424	-	152,50	200,03	-	229,00	149,32	114,30
	38,00	13,72	55,52	0,80	12,65	-	7,072	7424	-	150,36	200,03	-	229,00	147,18	114,30
8 1/2	26,40	8,33	38,08	0,96	14,38	-	4,851	8134	-	177,02	215,90	-	238,00	173,84	119,10
	29,70	9,52	43,24	0,96	14,38	-	5,508	8134	-	174,64	215,90	-	238,00	171,46	119,10
8 3/4	33,70	10,92	49,22	0,98	14,38	-	6,270	8134	-	171,84	215,90	-	238,00	168,66	119,10
	39,00	12,70	56,68	0,98	14,38	-	7,221	8134	-	168,28	215,90	-	238,00	165,10	119,10
9 1/2	32,3	7,92	43,20	1,31	21,2	-	5,886	11512	-	228,64	269,88	-	245	224,67	122,2
	36,00	8,94	51,93	1,32	21,20	-	6,615	11602	-	226,60	269,88	-	245,00	222,63	122,20
9 3/4	40,00	10,03	57,99	1,32	21,20	-	7,388	11602	-	224,42	269,88	-	245,00	220,45	122,20
	43,50	11,05	63,61	1,32	21,20	-	8,103	11602	-	222,38	269,88	-	245,00	218,41	122,20
10 1/4	47,00	11,99	68,75	1,32	21,20	-	8,757	11602	-	220,50	269,88	-	245,00	216,53	122,20
	53,50	13,84	78,72	1,33	21,20	-	10,028	11602	-	216,80	269,88	-	245,00	212,83	122,20
10 3/8	40,50	8,89	57,91	1,46	24,50	-	7,378	12915	-	255,27	298,45	-	245,00	251,30	122,20
	45,50	10,16	65,87	1,46	24,50	-	8,391	12915	-	252,73	298,45	-	245,00	248,76	122,20
10 3/4	51,00	11,43	73,75	1,48	24,50	-	9,394	12915	-	250,19	298,45	-	245,00	246,22	122,20
	55,50	12,57	80,75	1,48	24,50	-	10,286	12915	-	247,91	298,45	-	245,00	243,94	122,20
11 1/4	60,70	13,84	88,47	1,48	24,50	-	11,270	12915	-	245,37	298,45	-	245,00	241,40	122,20

Geometrical parameters of pipes with threaded connection TMK UP Simplex

Nominal pipe diameter	Pipe specific weight		Pipe wall thickness	Weight of plain-end pipes	Removed metal weight (both ends)	Coupling weight		Pipe cross-section area	Critical C/S area of special coupling	Inside diameter of connection	Outside diameter of coupling	Outside diameter of special coupling	Coupling length	Standard API-drift	Length makeup loss
	lb/ft	mm				kg	mm								
11 3/4	298,45	470	9,53	67,83	1,64	25,46	-	8650	13930	279,39	323,85	-	245	275,42	122,2
		54,0	11,05	78,32	1,65	25,46	-	9977	19330	276,35	323,85	-	245	272,38	122,2
12 3/4	323,85	45,91	8,50	66,10	1,74	29,10	-	11160	16150	306,85	350,52	-	245,00	302,88	122,20
		50,89	9,50	73,65	1,75	29,10	-	9 382	16150	304,85	350,52	-	245,00	300,88	122,20
		58,78	11,00	84,87	1,75	29,10	-	10 811	16150	301,85	350,52	-	245,00	297,88	122,20
		65,13	12,40	95,24	1,75	29,10	-	12 133	16150	299,05	350,52	-	245,00	295,08	122,20
13 3/8	339,72	72,87	14,00	106,98	1,75	29,10	-	13 628	16150	295,85	350,52	-	245,00	291,88	122,20
		54,50	9,65	78,55	1,82	30,24	-	10 007	15899	320,42	365,12	-	245,00	316,45	122,20
		61,00	10,92	88,55	1,82	30,24	-	11 280	15899	317,88	365,12	-	245,00	313,91	122,20
		68,00	12,19	98,46	1,84	30,24	-	12 543	15899	315,34	365,12	-	245,00	311,37	122,20
		72,00	13,06	105,21	1,84	30,24	-	13 403	15899	313,60	365,12	-	245,00	309,63	122,20

We draw your attention to the fact that technical characteristics are for reference only, and any person who uses this information should check its relevance, by contacting the technical department: techsales@tmk-group.com

We draw your attention to the fact that technical characteristics are for reference only, and any person who uses this information should check its relevance, by contacting the technical department: techsales@tmk-group.com

Strength characteristics of pipes with threaded connection TMK UP Simplex

Nominal pipe diameter	Pipe specific weight	Pipe wall thickness	Yield Strength in Tension, kN										Minimum Internal Yield Pressure, MPa										Collapse Pressure, MPa																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
			Minimum yield strength, MPa/ksi										Minimum yield strength MPa/ksi										Minimum yield strength MPa/ksi																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
			379	552	621	655	758	862	931	966	1035	1355	55	80	90	95	110	125	135	140	150	155	552	621	655	758	862	931	966	1035	1355	55	80	90	95	110	125	135	140	150	155																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																			
in	mm	mm	11,60	6,35	816	1189	1337	1411	1632	1856	2005	2080	2229	36,8	53,7	60,4	63,7	73,7	83,8	90,5	93,9	100,6	34,2	43,8	47,0	48,4	52,3	55,2	56,7	57,3	58,1	13,50	7,37	938	1367	1537	1877	2134	2305	2392	2562	42,8	62,3	70,1	73,9	85,5	97,3	105,1	105,0	116,8	44,3	59,0	64,2	66,7	73,7	80,1	83,9	85,7	88,9	15,10	8,56	1054	1535	1727	1822	2108	2397	2647	2747	2943	49,7	72,3	81,4	85,8	99,3	115,0	122,0	126,6	135,6	52,5	76,5	84,3	88,0	98,8	109,2	115,7	118,9	124,9	13,00	6,43	923	1344	1512	1595	1846	2099	2268	2353	2521	33,6	48,9	55,0	58,0	67,2	76,4	82,5	85,6	91,7	28,6	35,5	37,5	38,4	40,3	41,7	43,2	43,9	45,0	15,00	7,52	1070	1558	1753	1849	2140	2433	2628	2727	2921	39,3	57,2	64,3	67,9	78,5	89,3	96,5	100,1	107,2	38,3	50,0	54,1	55,9	61,0	65,4	67,8	68,9	70,7	18,00	9,19	1289	1878	2112	2228	2578	2932	3167	3286	3520	45,0	69,9	78,6	82,9	96,0	109,2	117,9	122,3	131,1	50,9	72,3	79,4	82,8	92,7	102,1	108,0	110,8	116,2	21,40	11,10	1314	1913	2152	2270	2627	2988	3167	3286	3520	48,0	74,4	84,4	90,0	103,2	115,9	131,8	142,4	147,8	58,3	80,5	88,1	99,1	104,5	120,9	137,5	148,5	154,1	165,1	23,20	12,14	1314	1913	2152	2270	2627	2988	4078	4232	4534	63,4	92,3	103,9	109,6	126,8	144,2	155,7	161,6	173,1	65,5	95,4	107,4	113,3	131,1	149,0	161,0	167,0	179,0	24,10	12,70	1314	1913	2152	2270	2627	2988	4246	4405	4720	66,3	96,6	108,7	114,6	132,7	150,9	162,9	169,1	181,1	68,2	99,4	111,8	117,9	136,4	155,2	167,6	173,9	186,3	15,50	6,98	1103	1607	1807	1906	2206	2509	2710	2811	-	33,1	48,3	54,3	57,3	66,3	75,4	81,4	84,5	-	27,8	34,4	36,2	37,0	38,8	40,5	41,9	42,5	-	17,00	7,72	1213	1767	1988	2097	2426	2759	2980	3092	-	36,7	53,4	60,1	63,3	73,3	83,4	90,0	93,4	-	33,8	43,3	46,4	47,9	51,5	54,4	55,8	56,3	-	20,00	9,17	1417	2064	2322	2449	2834	3223	3501	3633	-	43,5	63,4	71,3	75,2	87,1	99,0	106,9	111,0	-	45,6	60,9	66,5	69,1	76,6	83,4	87,5	89,4	-	23,00	10,54	1417	2064	2322	2449	2834	3223	3982	4131	-	50,0	72,9	82,0	86,5	100,1	113,8	122,9	127,5	-	52,9	77,0	85,4	89,2	100,3	110,8	117,4	120,6	-	16,14	7,00	1159	1688	1899	2003	2318	2636	2847	2954	-	31,8	46,3	52,1	54,9	63,6	72,3	78,1	81,0	-	25,5	30,9	32,3	32,8	34,8	36,8	37,9	38,3	-	17,68	7,70	1288	1847	2078	2192	2537	2885	3116	3233	-	35,0	50,9	57,3	60,4	69,9	79,5	85,9	89,1	-	31,0	39,0	41,5	42,7	45,4	47,3	48,0	48,2	-	19,62	8,50	1392	2028	2281	2406	2784	3166	3420	3548	-	38,6	56,2	63,2	66,7	77,2	87,8	94,8	98,4	-	37,2	48,3	52,1	53,9	58,6	62,6	64,7	65,7	-	21,51	9,50	1545	2250	2531	2669	3089	3513	3794	3937	-	43,1	62,8	70,7	74,6	86,3	98,1	106,0	110,0	-	45,0	59,9	65,3	67,9	75,2	81,7	85,7	87,5	-	24,01	10,70	1724	2511	2825	2980	3449	3922	4236	4395	-	48,6	70,8	79,6	84,0	97,2	110,5	119,4	123,9	-	51,5	73,9	81,2	84,7	95,0	104,7	110,7	113,7	-

TMK UP SIMPLEX

Streight characteristics of pipes with threaded connection TMK UP Simplex

Nominal pipe diameter	Pipe specific weight	Pipe wall thickness	Yield Strength in Tension, kN												Minimum Internal Yield Pressure, MPa												Collapse Pressure, MPa											
			Minimum yield strength, MPa/ksi												Minimum yield strength, MPa/ksi												Minimum yield strength, MPa/ksi											
			379	552	621	655	758	862	931	966	1035	379	552	621	655	758	862	931	966	1035	379	552	621	655	758	862	931	966	1035									
in	mm	mm	55	80	90	95	110	125	135	140	150	155	80	90	95	110	125	135	140	150	155	80	90	95	110	125	135	140	150									
6 5/8	168,28	20,00	1403	2043	2299	2424	2806	3191	3446	3576	-	28,9	42,0	47,3	49,9	57,7	65,6	70,9	73,5	-	20,5	24,0	25,5	26,2	27,8	28,8	29,1	29,2	-									
			2125	8,00	1527	2224	2502	2639	3063	3472	3750	3891	-	31,5	45,9	51,7	54,5	63,1	71,7	77,5	80,4	-	25,1	30,2	31,6	32,0	34,2	36,1	37,1	37,5	-							
			24,00	8,94	1696	2470	2779	2931	3392	3858	4166	4323	-	35,2	51,3	57,7	60,9	70,5	80,1	86,6	89,8	-	31,4	39,7	42,3	43,5	46,4	48,4	49,3	49,5	-							
			28,00	10,59	1988	2896	3256	3436	3977	4522	4884	5068	-	41,7	60,8	68,4	72,1	83,5	94,9	102,5	106,4	-	42,6	56,3	61,2	63,6	70,1	75,8	79,2	80,8	-							
			32,00	12,06	2243	3267	3676	3877	4486	5102	5510	5718	-	47,5	69,2	77,9	82,1	95,1	108,1	116,8	121,2	-	50,5	71,1	78,1	81,5	91,2	100,2	105,9	108,6	-							
			23,00	8,05	1627	2370	2666	2812	3254	3701	3997	4147	4443	30,0	43,7	49,2	51,9	60,1	68,3	73,8	76,5	82,0	22,5	26,4	27,8	28,6	30,6	32,0	32,6	32,8	33,0							
			26,00	9,19	1845	2687	3023	3189	3690	4196	4532	4702	5038	34,3	49,9	56,2	59,2	68,6	78,0	84,2	87,4	93,6	29,8	37,3	39,6	40,5	42,9	44,4	45,3	46,1	47,4							
			29,00	10,36	2065	3008	3384	3570	4181	4698	5074	5264	5640	38,6	56,3	63,3	66,8	77,3	87,9	94,9	98,5	105,5	37,2	48,4	52,2	54,0	58,8	62,8	64,9	65,9	67,5							
			32,00	11,51	2279	3319	3724	3939	4558	5183	5598	5809	6223	42,9	62,5	70,4	74,2	85,9	97,7	105,5	109,4	117,3	44,6	59,4	64,7	67,2	74,4	80,8	84,7	86,5	89,8							
			35,00	12,65	2487	3623	4076	4299	4975	5658	6110	6340	6793	47,2	68,7	77,3	81,6	94,4	107,3	115,9	120,3	128,9	50,1	70,3	77,1	80,4	89,8	96,7	104,2	106,9	112,0							
38,00	13,72	2680	3904	4392	4632	5361	6096	6584	6832	7320	51,2	74,5	83,9	88,5	102,4	116,4	125,7	130,4	139,8	54,0	78,6	88,4	92,7	104,3	115,5	122,6	126,1	132,7										
26,40	8,33	1838	2677	3012	3177	3677	4181	4516	4686	-	28,5	41,5	46,7	49,3	57,1	64,9	70,1	72,7	-	20,0	23,5	24,9	25,6	27,0	27,9	28,1	28,2	-										
29,70	9,52	2087	3040	3420	3608	4175	4748	5128	5321	-	32,6	47,5	53,4	56,3	65,2	74,1	80,1	83,1	-	26,9	33,0	34,7	35,4	36,8	39,1	40,3	40,8	-										
33,70	10,92	2376	3461	3894	4107	4753	5405	5837	6057	-	37,4	54,5	61,3	64,6	74,8	85,1	91,9	95,3	-	35,1	45,2	48,6	50,2	54,3	57,5	59,2	59,9	-										
39,00	12,70	2737	3986	4484	4730	5473	6224	6723	6975	-	43,5	63,3	71,3	75,2	87,0	98,9	106,8	110,8	-	45,6	60,8	66,3	69,0	76,4	83,2	87,3	89,2	-										
32,3	7,92	2231	3249	3655	3855	4462	5074	5480	5686	6092	21,5	31,3	35,2	37,1	43,0	48,9	52,8	54,8	58,7	10,8	11,8	11,9	12	12,1	12,2	12,3	12,4	12,5										
36,00	8,94	2507	3652	4108	4333	5014	5702	6159	6390	-	24,3	35,3	39,7	41,9	48,5	55,2	59,6	61,8	-	14,0	16,4	16,8	17,0	17,1	17,2	17,3	17,3	-										
40,00	10,03	2800	4078	4588	4839	5600	6368	6878	7136	-	27,2	39,6	44,6	47,0	54,4	61,9	66,8	69,3	-	17,7	21,3	22,4	22,9	23,9	24,3	24,4	24,4	-										
43,50	11,05	3071	4473	5032	5308	6142	6985	7544	7828	-	32,0	43,7	49,1	51,8	60,0	68,2	73,6	76,3	-	22,4	26,3	27,7	28,5	30,5	31,9	32,5	32,6	-										
47,00	11,99	3319	4834	5438	5736	6638	7549	8153	8460	-	37,5	50,3	56,3	59,2	68,5	78,0	84,0	87,8	-	26,8	32,8	34,5	35,1	36,5	38,9	40,1	40,6	-										
53,50	13,84	3801	5536	6227	6568	7601	8644	9336	9687	-	47,5	64,7	72,3	75,1	85,4	96,2	103,0	107,8	-	35,4	45,6	49,1	50,6	54,8	58,1	59,9	60,6	-										

We draw your attention to the fact that technical characteristics are for reference only, and any person who uses this information should check its relevance, by contacting the technical department: techsales@tmk-group.com


We draw your attention to the fact that technical characteristics are for reference only, and any person who uses this information should check its relevance, by contacting the technical department: techsales@tmk-group.com

Streight characteristics of pipes with threaded connection TMK UP Simplex

Nominal pipe diameter	Pipe specific weight	Pipe wall thickness	Yield Strength in Tension, kN												Minimum Internal Yield Pressure, MPa												Collapse Pressure, MPa											
			Minimum yield strength, MPa/ksi												Minimum yield strength, MPa/ksi												Minimum yield strength, MPa/ksi											
			379	552	621	655	758	862	931	966	1035	379	552	621	655	758	862	931	966	1035	379	552	621	655	758	862	931	966	1035									
in	mm	mm	55	80	90	95	110	125	135	140	150	155	80	90	95	110	125	135	140	150	155	80	90	95	110	125	135	140	150									
10 3/4	273,05	40,50	2796	4072	4582	4832	5592	6360	6869	7127	-	21,6	31,5	35,4	37,3	43,2	49,1	53,0	55,0	-	10,9	11,9	11,9	12,0	12,1	12,2	12,3	12,4	-									
			45,50	10,16	3180	4632	5211	5496	6360	7233	7812	8106	-	24,7	35,9	40,4	42,7	49,4	56,1	60,6	62,8	-	14,4	17,1	17,7	17,8	17,9	18,0	17,5	17,6	-							
			51,00	11,43	3560	5186	5834	6153	7121	8098	8746	9075	-	27,8	40,4	45,5	48,0	55,5	63,1	68,2	70,7	-	18,7	22,2	23,5	24,0	25,2	25,8	25,9	26,0	-							
			55,50	12,57	3899	5678	6388	6738	7797	8867	9577	9937	-	30,5	44,5	50,0	52,8	61,1	69,4	75,0	77,7	-	23,4	27,7	28,7	29,6	31,8	33,4	34,1	34,4	-							
			60,70	13,84	4271	6221	6999	7382	8543	9715	10493	10887	-	33,6	49,0	55,1	58,1	67,2	76,5	82,6	85,6	-	28,7	35,6	37,6	38,5	40,5	41,9	43,4	44,0	-							
			47,0	9,63	3278	4775	5372	5666	6557	7456	8053	8356	8953	21,2	30,8	34,7	36,6	42,4	48,2	52,0	54,0	57,8	10,4	10,5	11,4	11,5	11,6	11,7	11,8	11,9	12							
			54,0	11,05	3781	5507	6196	6536	7563	8600	9289	9638	10326	24,6	35,8	40,2	42,4	49,1	55,9	60,3	62,6	67,1	14,3	16,9	17,4	17,6	17,8	17,9	18,0	18,1	18							
			60,0	12,42	4230	6161	6931	7310	8460	9620	10390	10781	11581	27,6	40,2	45,2	47,7	55,2	62,8	67,8	70,4	75,4	18,4	18,4	21,9	23,2	23,7	24,9	25,4	25,5	25,6	26						
			45,91	8,50	3192	4648	5229	5516	6383	7259	7840	8135	8716	17,4	25,4	28,5	30,1	34,8	39,6	42,8	44,4	47,5	8,4	8,6	8,8	8,9	9,0	9,1	9,0	9,0	9,0							
			50,89	9,50	3556	5179	5826	6145	7111	8087	8734	9063	9710	19,5	28,3	31,9	33,6	38,9	44,3	47,8	49,6	53,1	8,5	8,7	8,9	9,0	9,0	9,0	9,0	9,1	9,0							
58,78	11,00	4097	5968	6714	7081	8195	9319	10065	10444	11190	22,5	32,8	36,9	38,9	45,1	51,2	55,3	57,4	61,5	12,0	13,5	13,6	13,5	13,5	13,5	13,9	14,0	14,1										
65,13	12,40	4598	6697	7534	7947	9187	10458	11296	11720	12557	25,4	37,0	41,6	43,9	50,8	57,8	62,4	64,7	69,4	15,2	18,2	19,0	19,3	19,6	19,6	19,8	19,9	20,0										
72,87	14,00	5165	7523	8463	8926	10330	11747	12688	13165	14105	28,7	41,8	47,0	49,6	57,3	65,2	70,4	73,1	78,3	20,2	23,7	25,2	25,8	27,4	28,3	28,5	28,6	28,7										
54,50	9,65	3792	5524	6214	6554	7585	8626	9316	9666	10357	18,8	27,4	30,9	32,6	37,7	42,9	46,3	48,0	51,4	7,8	7,9	8,0	8,0	8,1	8,2	8,3	8,4	8,5										
61,00	10,92	4275	6226	7005	7388	8550	9723	10502	10896	11675	21,3	31,1	34,9	36,8	42,6	48,5	52,4	54,3	58,2	10,6	10,7	10,8	10,8	10,9	11,0	11,1	11,2	11,3										
68,00	12,19	4754	6924	7789	8216	9508	10812	11678	12117	12982	23,8	34,7	39,0	41,1	47,6	54,1	58,5	60,7	65,0	13,4	15,6	16,0	16,1	16,2	16,3	16,4	16,5	16,6										
72,00	13,06	5080	7398	8323	8779	10159	11553	12478	12947	13872	25,5	37,1	41,8	44,1	51,0	58,0	62,6	65,0	69,6	15,4	18,4	19,2	19,5	19,9	20,0	20,1	20,2	20,3										


LITE SERIES / TMK UP™

CWB

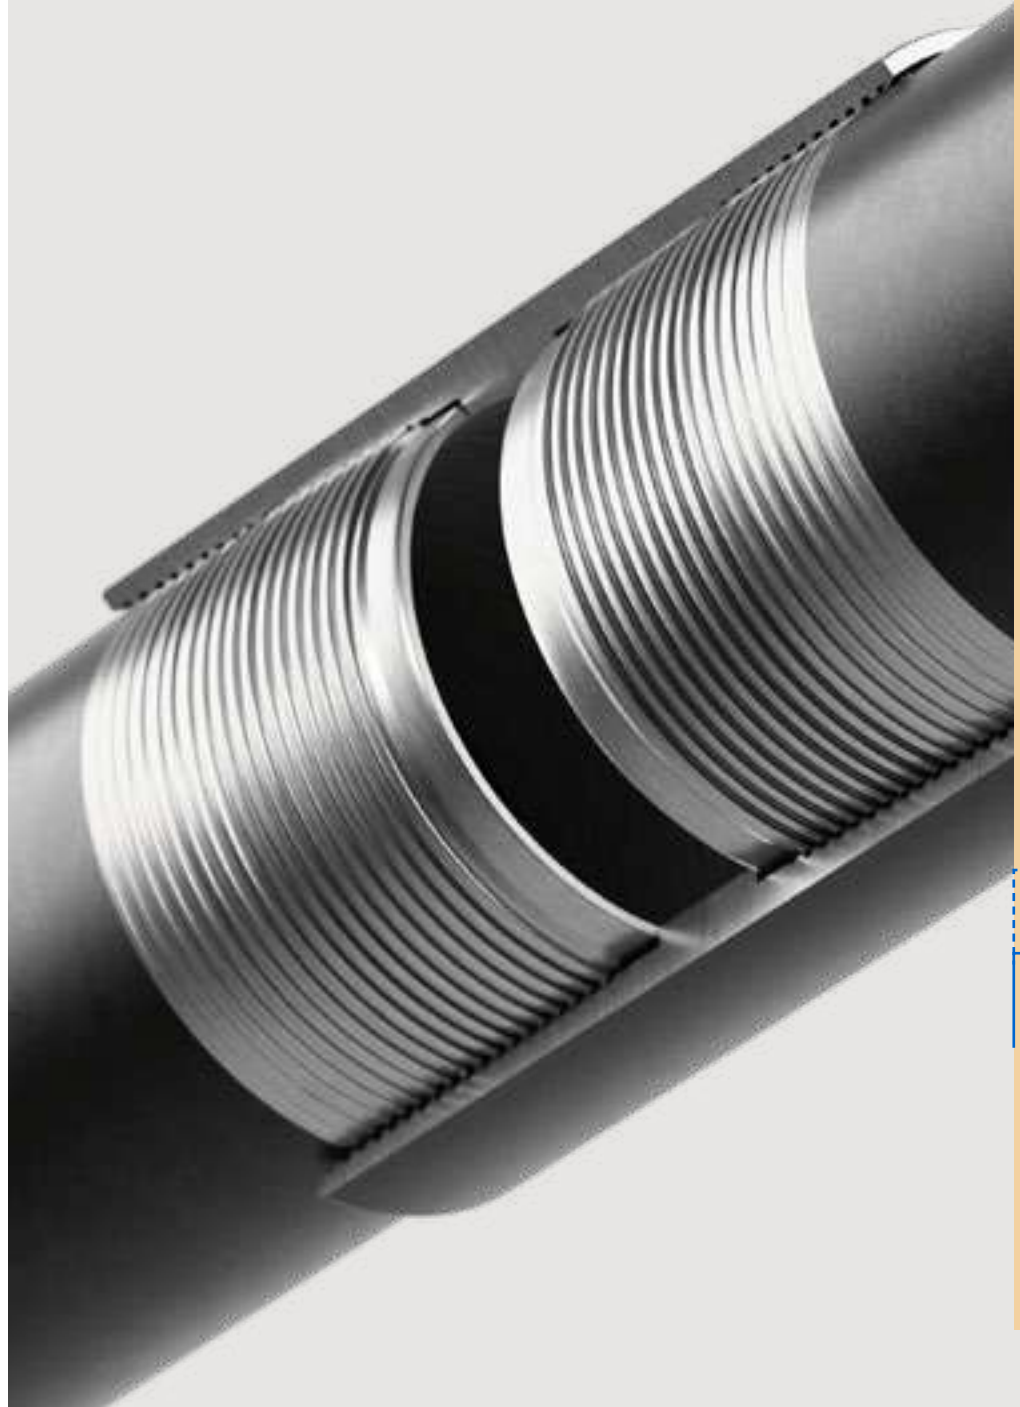


TMK UP

CWB

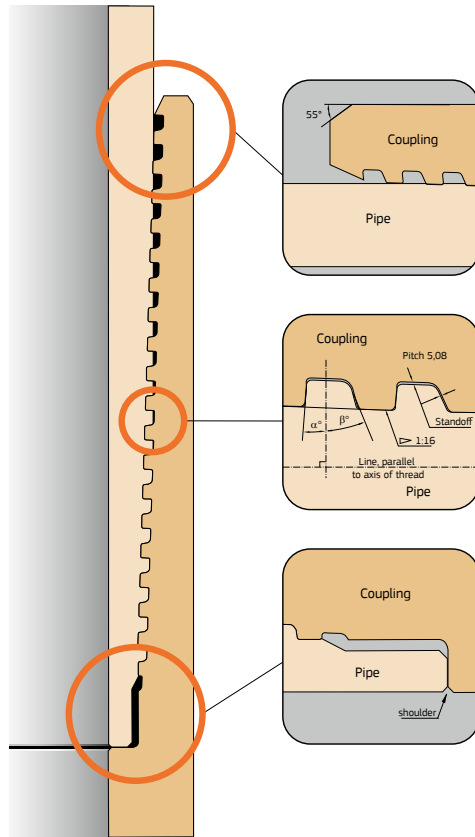

TMK UP CWB Performance Envelope

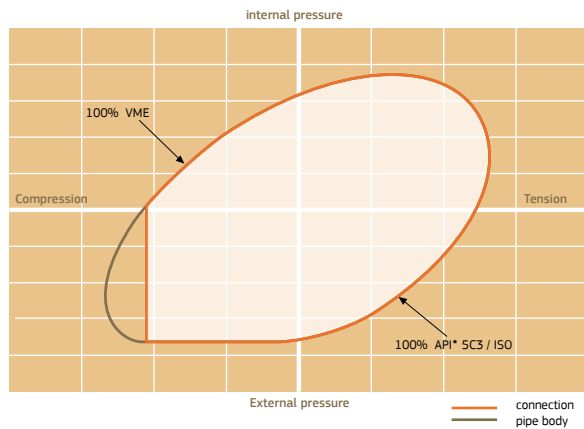

TMK UP CWB for Casing

TMK UP CWB – threaded and coupled connection with increased performance characteristics in reference to Buttress thread. Internal shoulder provides resistance to torque loads and 100%** efficiency to compressive loads. The connection has been fatigue tested and successfully used for Casing while Drilling, RIH and cementing operations with rotation. TMK UP CWB is an affordable and effective tool for well constructions in complicated conditions.

Range: 4"–13 3/8" / 101.60–339.72 mm

Unique Feature:

- 100%** compression efficiency
- 100%** tension efficiency
- Box-to-pin shoulder
- Sealability through thread compound
- Over-torque protection during make-up
- Additional sealing barrier
- Compatibility with API* Buttress without crossovers
- Robust galling resistance
- Increased fatigue strength
- Prevention from coupling's internal surface erosion

Application:

- Vertical wells
- Deviated wells
- Horizontal oil wells
- RIH with rotation
- Cementing with rotation
- Low GOR wells
- Casing while Drilling (CwD)

TMK UP CWB Geometrical parameters of pipes with threaded connection TMK UP CWB

Nominal pipe diameter	Pipe specific weight	Pipe wall thickness	Weight of plain-end pipes	Removed metal weight (both ends)	Coupling weight		Pipe cross-section area	Critical C/S area of special coupling	Inside diameter of coupling	Outside diameter of coupling	Outside diameter of special coupling	Coupling length	Drift diameter	Length make-up loss
					Regular	Special								
4	10,70	6,50	15,24	0,85	4,35	3,30	1,942	2686	88,60	114,00	110,00	190,00	85,42	83,00
	13,20	8,38	19,27	0,87	4,4	3,35	2,454	2686	86,40	114,00	110,00	190,00	81,66	83,00
4 1/2	13,50	7,37	19,44	0,61	5,83	4,60	2,476	2758	101,50	127,00	123,82	250,00	96,38	109,50
	15,10	8,56	22,32	0,62	5,91	4,68	2,844	2758	99,40	127,00	123,82	250,00	94,00	109,50
5	13,00	6,43	19,12	0,69	7,17	5,13	2,436	3443	114,10	141,30	136,52	250,00	110,96	110,10
	15,00	7,52	22,16	0,73	7,17	5,13	2,823	3443	114,10	141,30	136,52	250,00	108,78	110,10
5 1/2	18,00	9,19	26,70	0,74	7,3	5,26	3,401	3443	111,00	141,30	136,52	250,00	105,44	110,10
	21,40	11,10	31,73	0,74	7,44	5,40	4,042	3443	107,50	141,30	136,52	250,00	101,62	110,10
5 3/4	23,20	12,14	34,39	0,74	7,53	5,48	4,381	3443	105,40	141,30	136,52	250,00	99,54	110,10
	24,10	12,70	35,80	0,74	7,56	5,52	4,560	3443	104,40	141,30	136,52	250,00	98,42	110,10
5 1/2	15,50	6,98	22,85	0,8	7,57	5,49	2,910	3714	126,60	153,67	149,22	250,00	122,56	111,70
	17,00	7,72	25,13	0,84	7,57	5,49	3,201	3714	126,60	153,67	149,22	250,00	121,08	111,70
5 3/4	20,00	9,17	29,52	0,84	7,66	5,59	3,760	3714	123,90	153,67	149,22	250,00	118,18	111,70
	23,00	10,54	33,57	0,84	7,75	5,67	4,277	3714	123,90	153,67	149,22	250,00	115,44	111,70
6 5/8	16,14	7,00	24,00	1,13	11,13	6,17	3,058	5429	132,80	166,00	156,00	250,00	128,87	115,60
	17,68	7,70	26,27	1,16	11,13	6,17	3,347	5429	132,80	166,00	156,00	250,00	127,47	115,60
6 5/8	19,62	8,50	28,83	1,2	11,15	6,19	3,673	5429	132,30	166,00	156,00	250,00	125,87	115,60
	21,51	9,50	31,99	1,2	11,2	6,24	4,075	5429	130,50	166,00	156,00	250,00	123,87	115,60
6 5/8	24,01	10,70	35,71	1,2	11,27	6,31	4,550	5429	128,30	166,00	156,00	250,00	121,47	115,60
	20,00	7,32	29,06	1,08	12,13	6,55	3,702	6107	154,70	187,71	177,80	250,00	150,46	117,20
6 5/8	21,25	8,00	31,62	1,12	12,13	6,55	4,028	6107	153,20	187,71	177,80	250,00	149,10	117,20
	24,00	8,94	35,13	1,13	12,18	6,6	4,475	6107	153,20	187,71	177,80	250,00	147,22	117,20
6 5/8	28,00	10,59	41,18	1,14	12,27	6,69	5,246	6107	150,10	187,71	177,80	250,00	143,92	117,20
	32,00	12,06	46,46	1,14	12,35	6,77	5,919	6107	147,30	187,71	177,80	250,00	140,98	117,20

We draw your attention to the fact that technical characteristics are for reference only, and any person who uses this information should check its relevance, by contacting the technical department: techsales@tmk-group.com

Geometrical parameters of pipes with threaded connection TMK UP CWB

Nominal pipe diameter	Pipe specific weight	Pipe wall thickness	Weight of plain-end pipes	Removed metal weight (both ends)	Coupling weight		Pipe cross-section area	Critical C/S area of special coupling	Inside diameter of coupling	Outside diameter of coupling	Outside diameter of special coupling	Coupling length	Drift diameter	Length make-up loss
					Regular	Special								
7	23,00	8,05	33,70	1,28	15,55	7,50	4,291	7393	164,00	200,03	187,32	265,00	158,62	122,00
	26,00	9,19	38,21	1,3	15,62	7,58	4,866	7393	162,20	200,03	187,32	265,00	156,24	122,00
7	29,00	10,36	42,78	1,3	15,71	7,67	5,447	7393	160,00	200,03	187,32	265,00	153,90	122,00
	32,00	11,51	47,20	1,3	15,8	7,76	6,010	7393	157,80	200,03	187,32	265,00	151,60	122,00
7	35,00	12,65	51,52	1,31	15,88	7,84	6,560	7393	155,80	200,03	187,32	265,00	149,32	122,00
	38,00	13,72	55,92	1,32	15,97	7,92	7,069	7393	153,80	200,03	187,32	265,00	147,18	122,00
7 5/8	42,70	15,88	63,41	1,34	16,11	8,07	8,074	7393	150,00	200,03	187,32	265,00	142,86	122,00
	46,40	17,45	69,01	1,33	16,24	8,19	8,786	7393	146,80	200,03	187,32	265,00	139,72	122,00
7 5/8	29,70	9,52	43,24	1,55	17,57	10,76	5,508	8103	177,40	215,90	206,38	275,00	171,46	128,37
	33,70	10,92	49,22	1,59	17,65	10,84	6,270	8103	175,40	215,90	206,38	275,00	168,66	128,37
7 5/8	39,00	12,70	56,68	1,57	17,81	10,99	7,221	8103	171,40	215,90	206,38	275,00	165,10	128,37
	45,30	15,11	66,54	1,63	17,94	11,12	8,477	8103	168,00	215,90	206,38	275,00	160,28	128,37
7 5/8	32,30	7,92	46,20	2,02	27,55	15,17	5,886	11544	230,10	269,88	257,18	300,00	224,67	133,10
	36,00	8,94	51,93	2,13	27,55	15,17	6,615	11544	230,10	269,88	257,18	300,00	222,63	133,10
7 5/8	40,00	10,03	57,99	2,14	27,74	15,36	7,388	11544	228,10	269,88	257,18	300,00	220,45	133,10
	43,50	11,05	63,61	2,15	27,92	15,54	8,103	11544	226,20	269,88	257,18	300,00	218,41	133,10
7 5/8	47,00	11,99	68,75	2,15	28,09	15,71	8,757	11544	224,40	269,88	257,18	300,00	216,53	133,10
	53,50	13,84	78,72	2,17	28,4	16,02	10,028	11544	221,00	269,88	257,18	300,00	212,83	133,10
7 5/8	58,40	15,11	85,47	2,18	28,62	16,24	10,888	11544	218,60	269,88	257,18	300,00	210,29	133,10
	59,40	15,47	87,37	2,18	28,69	16,31	11,130	11544	217,90	269,88	257,18	300,00	209,57	133,10
7 5/8	64,90	17,07	95,73	2,19	28,96	16,57	12,195	11544	214,90	269,88	257,18	300,00	206,37	133,10

We draw your attention to the fact that technical characteristics are for reference only, and any person who uses this information should check its relevance, by contacting the technical department: techsales@tmk-group.com

Nominal pipe diameter	Pipe specific weight	Pipe wall thickness	Weight of plain-end pipes	Removed metal weight (both ends)	Coupling weight		Pipe cross-section area	Critical C/S area of special coupling	Critical C/S area of special coupling	Inside diameter of coupling	Outside diameter of coupling	Outside diameter of special coupling	Coupling length	Drift diameter	Length make-up loss
					Regular	Special									
10.3/4	40.50	8.89	57.91	2.25	30.6	16.88	7.378	12857	7029	258.70	298.50	285.80	300.00	251.30	133.10
	46.50	10.16	65.87	2.36	30.73	17.01	8.391	12857	7029	297.50	298.50	285.80	300.00	248.76	133.10
12.3/4	51.00	11.43	73.75	2.38	30.98	17.25	9.394	12857	7029	255.20	298.50	285.80	300.00	246.22	133.10
	55.50	12.57	80.75	2.35	31.21	17.49	10.286	12857	7029	253.00	298.50	285.80	300.00	243.94	133.10
13.3/8	60.70	13.84	88.47	2.39	31.43	17.71	11.270	12857	7029	250.90	298.50	285.80	300.00	241.40	133.10
	73.20	17.07	107.76	1.91	33.34	19.16	13.727	12857	7029	246.00	298.50	285.80	300.00	234.94	133.10
14.3/4	45.91	8.50	66.10	2.76	38.39	-	8.421	16092	-	309.50	351.00	-	310.00	302.88	133.10
	50.89	9.50	73.65	2.92	40.08	-	9.382	16092	-	309.50	351.00	-	310.00	300.88	133.10
15.3/8	58.78	11.00	84.87	2.94	40.57	-	10.811	16092	-	306.50	351.00	-	310.00	297.88	133.10
	65.13	12.40	95.24	2.94	41.02	-	12.133	16092	-	303.80	351.00	-	310.00	295.08	133.10
16.3/4	72.87	14.00	106.98	2.96	41.51	-	13.628	16092	-	300.80	351.00	-	310.00	291.88	133.10
	84.50	16.00	124.55	3.08	43.6	-	15.007	15841	-	325.00	365.13	-	310.00	316.45	133.10
17.3/8	61.00	10.92	88.55	3.1	40.37	-	11.280	15841	-	322.70	365.13	-	310.00	313.91	133.10
	68.00	12.19	98.46	3.12	40.84	-	12.543	15841	-	320.30	365.13	-	310.00	311.37	133.10
18.3/4	72.00	13.06	105.21	3.08	40.17	-	13.403	15841	-	318.60	365.13	-	310.00	309.63	133.10

We draw your attention to the fact that technical characteristics are for reference only, and any person who uses this information should check its relevance, by contacting the technical department: techsales@tmk-group.com

Strength characteristics of pipes with TMK UP CWB threaded connection

Nominal pipe diameter	Pipe specific weight	Pipe wall thickness	Yield Strength in Tension, kN		Minimum Internal Yield Pressure, MPa		Collapse Pressure, MPa																						
			Minimum yield strength MPa/ksi	Yield strength MPa/ksi	Minimum yield strength MPa/ksi	Minimum yield strength MPa/ksi																							
4	10.70	6.50	736	1072	1206	1472	1674	1808	1876	2010	42.4	61.8	69.5	73.3	84.9	96.5	104.2	105.2	115.9	43.7	58.1	63.3	65.7	72.5	78.7	82.4	84.1	87.2	
	13.20	8.38	930	1355	1524	1607	1860	2115	2285	2371	2540	42.4	61.8	69.5	73.3	84.9	96.5	104.2	105.2	115.9	43.7	58.1	63.3	65.7	72.5	78.7	82.4	84.1	87.2
4 1/2	13.50	7.37	938	1367	1537	1622	1877	2134	2305	2392	2562	42.8	62.3	70.1	73.9	85.5	97.3	105.1	109.0	116.8	44.3	59.0	64.2	66.7	73.7	80.1	83.9	85.7	88.9
	15.10	8.56	1045	1522	1713	1806	2091	2377	2568	2664	2855	49.7	72.3	81.4	85.8	99.3	113.0	122.0	126.6	135.6	52.5	76.5	84.3	88.0	98.8	109.2	115.7	118.9	124.9
5	13.00	6.43	923	1344	1512	1595	1846	2099	2268	2353	2521	33.6	48.9	55.0	58.0	67.2	76.4	82.5	85.6	91.7	28.6	35.5	37.5	38.4	40.3	41.7	43.2	43.9	45.0
	15.00	7.52	1070	1558	1753	1849	2140	2433	2628	2727	2921	39.3	57.2	64.3	67.9	78.5	89.3	96.5	100.1	107.2	38.3	50.0	54.1	55.9	61.0	65.4	67.8	68.9	70.7
5 1/2	18.00	9.19	1289	1878	2112	2228	2578	2932	3167	3286	3520	48.0	69.9	78.6	82.9	96.0	109.2	117.9	122.3	131.1	50.9	72.3	79.4	82.8	92.7	102.1	108.0	110.8	116.2
	21.40	11.10	1305	1901	2138	2255	2610	2968	3205	3326	3564	58.0	84.4	95.0	100.2	115.9	131.8	142.4	147.8	158.3	60.5	88.1	99.1	104.5	120.9	137.5	148.5	154.1	165.1
5 3/4	23.20	12.14	1305	1901	2138	2255	2610	2968	3205	3326	3564	63.4	92.3	103.9	109.6	126.8	144.2	155.7	161.6	173.1	65.5	95.4	107.4	113.3	131.1	149.0	161.0	167.0	179.0
	24.10	12.70	1305	1901	2138	2255	2610	2968	3205	3326	3564	66.3	96.6	108.7	114.6	132.7	150.9	162.9	169.1	181.1	68.2	99.4	111.8	117.9	136.4	155.2	167.6	173.9	186.3
5 1/2	15.50	6.98	1103	1607	1807	1906	2206	2509	2710	2811	3012	33.1	48.3	54.3	57.3	66.3	75.4	81.4	84.5	90.5	27.8	34.4	36.2	37.0	38.8	40.5	41.9	42.5	43.5
	17.00	7.72	1213	1767	1988	2097	2426	2759	2980	3092	3313	36.7	53.4	60.1	63.3	73.3	83.4	90.0	93.4	100.1	33.8	43.3	46.4	47.9	51.5	54.4	55.8	56.3	57.1
5 3/4	20.00	9.17	1408	2050	2306	2433	2815	3201	3458	3588	3844	43.5	63.4	71.3	75.2	87.1	99.0	106.9	111.0	118.9	45.6	60.9	66.5	69.1	76.6	83.4	87.5	89.4	92.9
	23.00	10.54	1408	2050	2306	2433	2815	3201	3458	3588	3844	50.0	72.9	82.0	86.5	100.1	113.8	122.9	127.5	136.7	52.9	77.0	85.4	89.2	100.3	110.8	117.4	120.6	126.8
5 3/4	16.14	7.00	1159	1688	1899	2003	2318	2636	2847	2954	3165	31.8	46.3	52.1	54.9	63.6	72.3	78.1	81.0	86.8	25.5	30.9	32.3	32.8	34.8	36.8	37.9	38.3	38.9
	17.68	7.70	1268	1847	2078	2192	2537	2885	316	3233	3464	35.0	50.9	57.3	60.4	69.9	79.5	85.9	89.1	95.5	31.0	39.0	41.5	42.7	45.4	47.3	48.0	48.2	49.7
6 5/8	19.62	8.50	1392	2028	2281	2406	2784	3166	3420	3548	3802	38.6	56.2	63.2	66.7	77.2	87.8	94.8	98.4	105.4	37.2	48.3	52.1	53.9	58.6	62.6	64.7	65.7	67.2
	21.51	9.50	1545	2250	2531	2669	3089	3513	3794	3937	4218	43.1	62.8	70.7	74.6	86.3	98.1	106.0	110.0	117.8	45.0	59.9	65.3	67.9	75.2	81.7	85.7	87.5	90.9
6 5/8	20.00	7.32	1403	2043	2299	2424	2806	3191	3446	3576	3831	28.9	42.0	47.3	49.9	57.7	65.6	70.9	73.5	78.8	20.5	24.0	25.5	26.2	27.8	28.8	29.1	29.2	29.3
	21.25	8.00	1527	2224	2502	2639	3053	3472	3750	3891	4169	31.5	45.9	51.7	54.5	63.1	71.7	77.5	80.4	86.1	25.1	30.2	31.6	32.0	34.2	36.1	37.1	37.5	38.1
6 5/8	24.00	8.94	1696	2470	2779	2931	3392	3858	4166	4323	4632	35.2	51.3	57.7	60.9	70.5	80.1	86.6	89.8	96.2	31.4	39.7	42.3	43.5	46.4	48.4	49.3	49.5	50.6
	28.00	10.59	1988	2896	3258	3436	3977	4522	4884	5068	5430	41.7	60.8	68.4	72.1	83.5	94.9	101.6	104.2	114.0	42.2	56.3	61.2	63.6	71.1	75.8	79.2	80.8	83.6
32.00	12.06	2243	3267	3676	3877	4486	5102	5510	5718	6126	47.5	69.2	77.9	82.1	95.1	108.1	116.8	121.2	129.8	50.5	71.1	76.1	81.5	91.2	100.2	105.9	108.6	113.8	

We draw your attention to the fact that technical characteristics are for reference only, and any person who uses this information should check its relevance, by contacting the technical department: techsales@tmk-group.com

TMK UP CWB

Streight characteristics of pipes with TMK UP CWB threaded connection

Nominal pipe diameter	Pipe specific weight	Pipe wall thickness	Yield Strength in Tension, kN											Minimum Internal Yield Pressure, MPa											Collapse Pressure, MPa										
			Minimum yield strength MPa/ksi											Minimum yield strength MPa/ksi											Minimum yield strength MPa/ksi										
in	mm	lb/ft	mm	379	552	621	655	758	862	931	966	1035	379	552	621	655	758	862	931	966	1035	379	552	621	655	758	862	931	966	1035					
				55	80	90	95	110	125	135	140	150	150	55	80	90	95	110	125	135	140	150	55	80	90	95	110	125	135	140	150				
		23.00	8.05	1626	2369	2665	2811	3253	3699	3995	4145	4441	4441	30.0	43.7	49.2	51.9	60.1	68.3	73.8	76.5	82.0	22.5	26.4	27.8	28.6	30.6	32.0	32.6	32.8	33.0				
		26.00	9.19	1844	2696	3022	3187	3688	4194	4530	4701	5036	5036	34.3	49.9	56.2	59.2	68.6	78.0	84.2	87.4	93.6	29.8	37.3	39.6	40.5	42.9	44.4	45.3	46.1	47.4				
7	177.8	29.00	10.36	2064	3007	3383	3568	4129	4695	5071	5262	5638	5638	38.6	56.3	63.3	66.8	77.3	87.9	94.9	98.5	105.5	37.2	48.4	52.2	54.0	58.8	62.8	64.9	65.9	67.5				
		32.00	12.65	2486	3621	4074	4297	4972	5655	6107	6337	6790	6790	42.9	62.5	70.4	74.2	85.9	97.7	105.5	109.4	117.3	44.6	59.4	64.7	67.2	74.4	80.8	84.7	86.5	89.8				
		38.00	13.72	2679	3902	4390	4630	5358	6093	6581	6829	7316	7316	51.2	74.5	83.9	88.5	102.4	116.4	125.7	130.4	139.8	54.0	78.6	88.4	92.7	104.3	115.5	122.6	126.1	132.7				
7 5/8	193.68	42.70	15.88	2802	4081	4591	4842	5604	6373	6883	7142	7652	7652	59.2	86.3	97.1	102.4	134.7	145.5	151.0	161.8	161.8	61.7	89.8	101.0	106.6	123.3	140.2	151.4	157.1	168.4				
		46.40	17.45	2802	4081	4591	4842	5604	6373	6883	7142	7652	7652	65.1	94.8	106.7	112.5	130.2	148.1	159.9	165.9	177.8	67.1	97.7	109.9	116.0	134.2	152.6	164.8	171.0	183.2				
		29.70	9.52	2087	3040	3420	3608	4175	4748	5128	5321	5701	5701	32.6	47.5	53.4	56.3	65.2	74.1	80.1	83.1	89.0	26.9	33.0	34.7	35.4	36.8	39.1	40.3	40.8	41.7				
		33.70	10.92	2376	3461	3894	4107	4753	5405	5837	6057	6489	6489	37.4	54.5	61.3	64.6	74.8	85.1	91.9	95.3	102.1	35.1	45.2	48.6	50.2	54.3	57.5	59.2	59.9	61.0				
		39.00	12.70	2737	3986	4484	4730	5473	6224	6723	6975	7474	7474	43.5	63.3	71.3	75.2	87.0	98.9	106.8	110.8	118.8	45.6	60.8	66.3	69.0	76.4	83.2	87.3	89.2	92.7				
		45.30	15.11	3071	4473	5032	5307	6142	6985	7544	7827	8387	8387	51.7	75.4	84.8	89.4	103.5	117.7	127.1	131.9	141.3	54.6	79.4	89.3	94.3	106.5	117.9	125.3	128.8	135.7				
		32.30	7.92	2231	3249	3655	3855	4462	5074	5480	5680	6092	6092	21.5	31.3	35.2	37.1	43.0	48.9	52.8	54.7	58.7	10.8	11.8	11.9	12.0	12.1	12.2	12.3	12.4	12.5				
		36.00	8.94	2507	3652	4108	4333	5014	5702	6159	6384	6847	6847	24.3	35.3	39.7	41.9	48.5	55.2	59.6	61.8	66.2	14.0	16.4	16.8	17.0	17.1	17.2	17.3	17.3	17.4				
		40.00	10.03	2800	4078	4588	4839	5600	6368	6878	7129	7646	7646	27.2	39.6	44.6	47.0	54.4	61.9	66.8	69.3	74.3	17.7	21.3	22.4	22.9	23.9	24.3	24.4	24.4	24.5				
9 5/8	244.48	43.50	11.05	3071	4473	5032	5308	6142	6985	7544	7820	8387	8387	30.0	43.7	49.1	51.8	60.0	66.2	73.6	76.3	81.9	22.4	26.3	27.7	28.5	30.5	31.9	32.5	32.6	32.7				
		47.00	11.99	3319	4834	5438	5736	6638	7549	8153	8451	9064	9064	32.5	47.4	53.3	56.2	65.1	74.0	79.9	82.8	88.8	26.8	32.8	34.5	35.1	36.5	38.9	40.1	40.6	41.4				
		53.50	13.84	3801	5536	6227	6568	7601	8644	9336	9677	10379	10379	37.5	54.7	61.5	64.9	75.1	85.4	92.2	95.6	102.5	35.4	45.6	49.1	50.6	54.8	58.1	59.9	60.6	61.8				
		59.40	15.47	4218	6144	6912	7290	8437	9594	10362	10740	11260	11260	42.0	61.1	68.8	72.5	83.9	95.5	103.1	108.9	114.6	43.0	56.9	61.9	64.3	70.9	76.8	80.3	81.9	84.8				
		64.90	17.07	4375	6372	7169	7561	8750	9951	10747	11140	11948	11948	46.3	67.4	75.9	80.0	92.6	105.3	113.8	117.9	126.5	49.3	68.0	74.6	77.7	86.7	95.1	100.3	102.7	107.4				

We draw your attention to the fact that technical characteristics are for reference only, and any person who uses this information should check its relevance, by contacting the technical department: techsales@tmk-group.com


Streight characteristics of pipes with TMK UP CWB threaded connection


Nominal pipe diameter	Pipe specific weight	Pipe wall thickness	Yield Strength in Tension, kN											Minimum Internal Yield Pressure, MPa											Collapse Pressure, MPa										
			Minimum yield strength MPa/ksi											Minimum yield strength MPa/ksi											Minimum yield strength MPa/ksi										
in	mm	lb/ft	mm	379	552	621	655	758	862	931	966	1035	379	552	621	655	758	862	931	966	1035	379	552	621	655	758	862	931	966	1035					
				55	80	90	95	110	125	135	140	150	150	55	80	90	95	110	125	135	140	150	55	80	90	95	110	125	135	140	150				
10 3/4	273.05	40.50	8.89	2796	4072	4582	4832	5592	6360	6869	7119	7636	7636	21.6	31.5	35.4	37.3	43.2	49.1	53.0	55.0	59.0	10.9	11.9	12.0	12.1	12.2	12.3	12.4	12.5					
		45.50	10.16	3180	4632	5211	5496	6360	7233	7812	8097	8685	8685	24.7	35.9	40.4	42.7	49.4	56.1	60.6	62.8	67.4	14.4	17.1	17.7	17.8	17.9	18.0	17.5	17.6	17.7				
		51.00	11.43	3560	5186	5834	6163	7121	8098	8746	9066	9723	9723	27.8	40.4	45.5	48.0	55.5	63.1	68.2	70.7	75.8	18.7	22.2	23.5	24.0	25.2	25.8	25.9	26.0	26.1				
		55.50	12.57	3899	5678	6388	6738	7797	8867	9577	9926	10646	10646	30.5	44.5	50.0	52.8	61.1	68.4	75.0	77.7	83.4	23.4	27.7	28.7	29.6	31.8	33.4	34.1	34.4	34.7				
		60.70	13.84	4271	6221	6999	7382	8543	9715	10493	10876	11665	11665	33.6	49.0	55.1	58.1	67.2	76.5	82.6	85.6	91.8	28.7	35.6	37.6	38.5	40.5	41.9	43.4	44.0	45.1				
		73.20	17.07	4873	7097	7984	8421	9746	11083	11970	12407	13307	13307	41.5	60.4	67.9	71.7	82.9	94.3	101.9	105.6	113.2	42.1	55.6	60.4	62.7	69.1	74.6	77.9	79.4	82.8				
		45.91	8.50	3192	4648	5229	5516	6383	7259	7840	8135	8716	8716	17.4	25.4	28.5	30.1	34.8	39.6	42.8	44.4	47.5	8.4	8.6	8.8	8.9	9.0	9.1	9.0	9.0	9.0				
		50.89	9.50	3556	5179	5826	6145	7111	8087	8734	9063	9710	9710	19.5	28.3	31.9	33.6	38.9	44.3	47.8	49.6	53.1	8.5	8.7	8.9	9.0	9.0	9.0	9.1	9.0	9.0				
12 3/4	323.85	58.78	11.00	4097	5968	6714	7081	8195	9319	10065	10444	11190	11190	22.5	32.8	36.9	38.9	45.1	51.2	55.3	57.4	61.5	12.0	13.5	13.6	13.5	13.5	13.5	13.9	14.0	14.1				
		65.13	12.40	4598	6697	7534	7947	9187	10458	11296	11720	12557	12557	25.4	37.0	41.6	43.9	50.8	57.8	62.4	64.7	69.4	15.2	18.2	19.0	19.3	19.6	19.6	19.8	19.9	20.0				
		72.87	14.00	5165	7523	8463	8926	10330	11747	12688	13165	14105	14105	28.7	41.8	47.0	49.6	57.3	65.2	70.4	73.1	78.3	20.2	23.7	25.2	25.8	27.4	28.3	28.5	28.6	28.7				
		54.50	9.65	3792	5524	6214	6554	7585	8626	9316	9666	10357	10357	18.8	27.4	30.9	32.6	37.7	42.9	46.3	48.0	51.4	7.8	7.9	8.0	8.0	8.1	8.2	8.3	8.4	8.5				
13 3/8	339.72	61.00	10.92	4275	6226	7005	7398	8550	9723	10502	10896	11675	11675	21.3	31.1	34.9	36.8	42.6	48.5	52.4	54.3	58.2	10.6	10.7	10.8	10.8	10.9	11.0	11.1	11.2	11.3				
		68.00	12.19	4754	6924	7789	8216	9508	10812	11678	12117	12982	12982	23.8	34.7	39.0	41.1	47.6	54.1	58.5	60.7	65.0	13.4	15.6	16.0	16.1	16.2	16.3	16.4	16.5	16.6				
		72.00	13.06	5080	7398	8323	8779	10169	11553	12478	12947	13872	13872	25.5	37.1	41.8	44.1	51.0	58.0	62.6	65.0	69.6	15.4	18.4	19.2	19.5	19.9	20.0	20.1	20.2	20.3				

We draw your attention to the fact that technical characteristics are for reference only, and any person who uses this information should check its relevance, by contacting the technical department: techsales@tmk-group.com

LITE SERIES / TMK UP™

CWB II

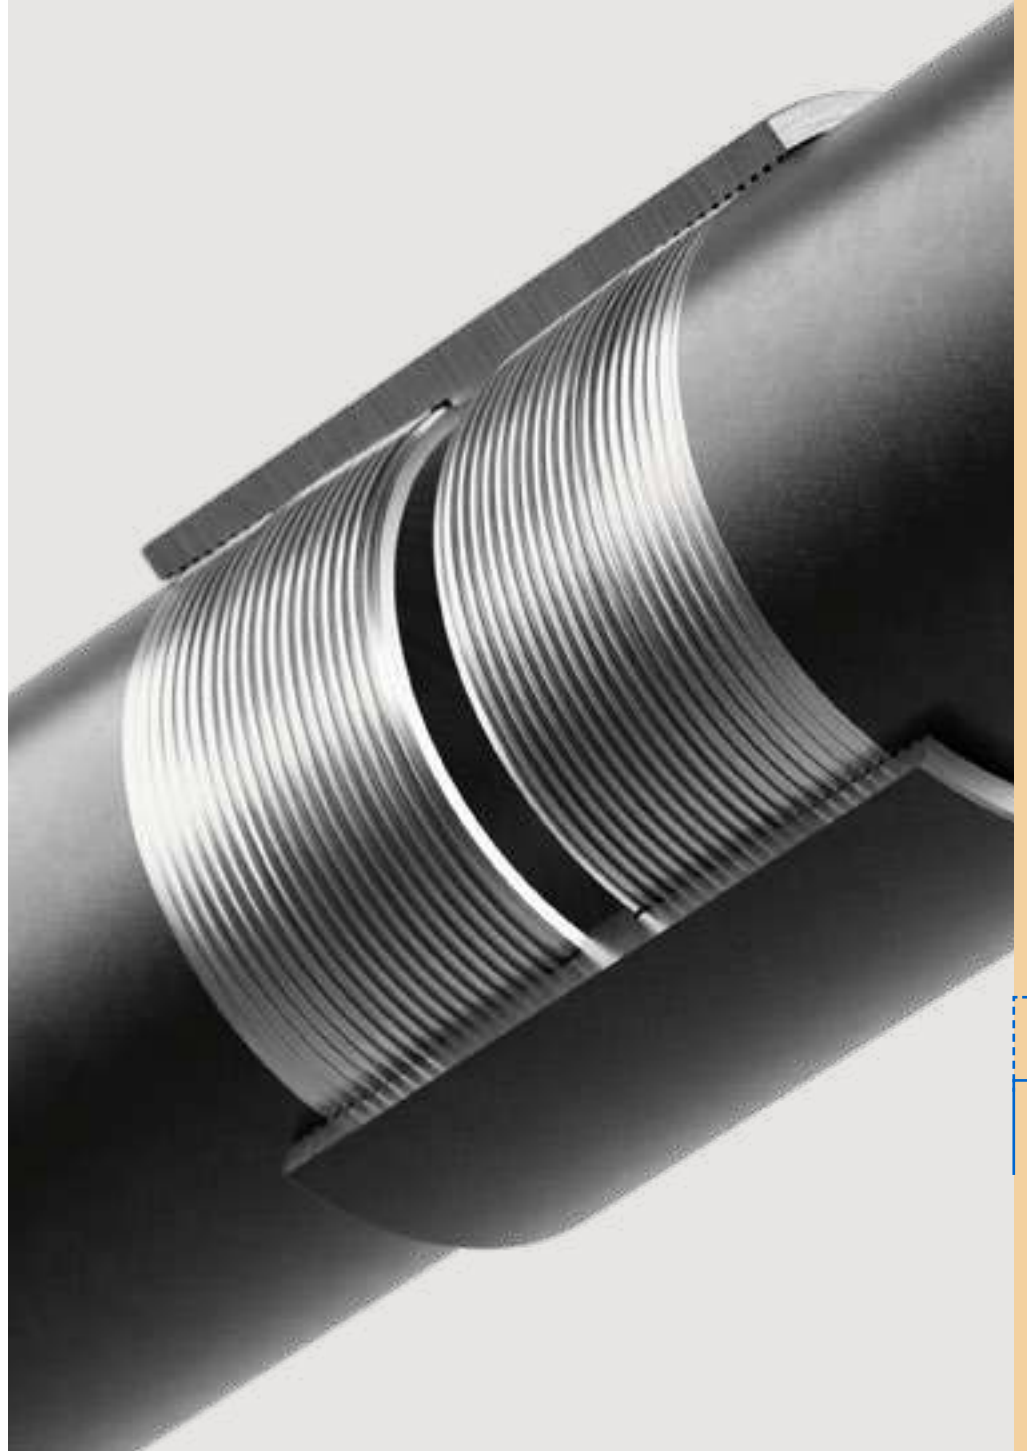

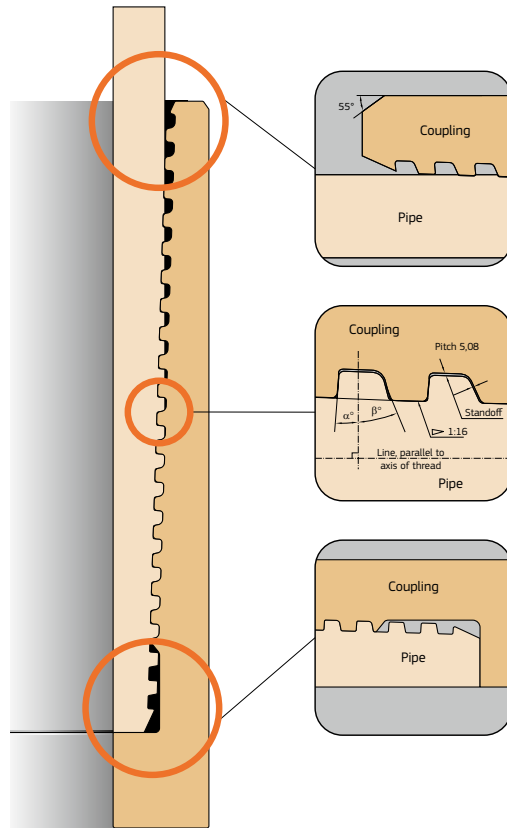

TMK UP CWB II

TMK UP CWB II – threaded and coupled connection with increased performance characteristics in reference to Buttress thread. Connection is an excellent alternative to Buttress connection with a wide range of application: string rotation during run-in-hole operation, cementing operations and also drilling while casing. The key difference from TMK UP CWB is the increased thickness of the torque shoulder, which provides higher resistance to torsional loads and increases compression performance.

Range: 4-1/2"–13-3/8" / 114,3 mm–339,72 mm


Unique Feature:

- 100%** compression efficiency
- 100%** tension efficiency
- Box-to-pin shoulder
- Enlarged torque shoulder for high torsional capacity and increased compression performance
- Sealability through thread compound
- Over-torque protection during make-up
- Additional sealing barrier
- Compatibility with API* Buttress without crossovers
- Robust galling resistance
- Increased fatigue strength
- Prevention from coupling's internal surface erosion

Application:

- Vertical wells
- Deviated wells
- Horizontal oil wells
- RIH with rotation
- Cementing with rotation
- Low GOR wells
- Casing while drilling (CwD)

TMK UP CWB II Performance Envelope

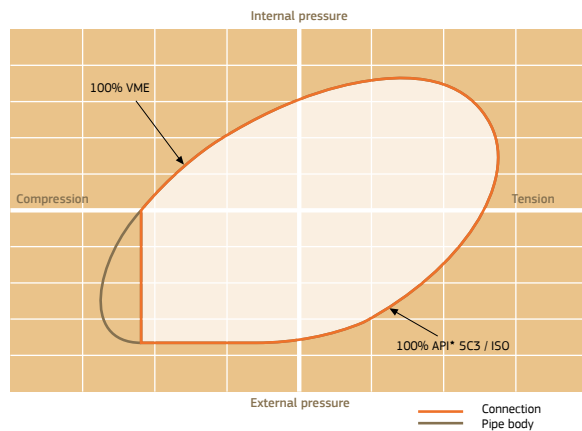

Geometrical parameters of pipes with threaded connection TMK UP CWB II

Nominal pipe diameter	Pipe specific weight	Pipe wall thickness	Weight of plain-end pipes	Removed metal weight (both ends)	Coupling weight		Pipe cross-section area	Critical C/S area of coupling	Critical C/S area of special coupling	Inside diameter of coupling	Outside diameter of special coupling	Coupling length	Drift diameter	Length makeup loss
					Regular	Special								
4 1/2	lb/ft	mm	kg/m	kg	kg	kg	mm ²	mm ²	mm ²	mm	mm	mm	mm	mm
	11,51	6,35	16,61	0,33	4,64	4,26	2154	2154	2012	101,6	123,82	217	98,42	98,5
5	12,39	6,88	18,23	0,35	4,66	4,28	2322	2322	2012	100,5	123,82	217	97,36	98,5
	13,19	7,37	19,44	0,37	4,68	4,32	2476	2476	2012	99,6	123,82	217	96,38	98,5
5 1/2	15,11	8,56	22,32	0,38	4,74	4,36	2844	2639	2012	97,2	123,82	217	94	98,5
	13,2	6,43	19,12	0,74	8,42	4,29	2436	2436	2268	114,1	141,3	220	110,96	100,1
5 3/4	15,22	7,52	22,16	0,8	8,46	4,33	2823	2823	2268	112	141,3	220	108,78	100,1
	18,25	9,19	26,7	0,86	8,54	4,41	3401	3311	2268	108,6	141,3	220	105,44	100,1
7	21,59	11,10	31,73	0,94	8,64	4,51	4042	3311	2268	104,8	141,3	220	101,62	100,1
	23,36	12,14	34,39	0,98	8,7	4,57	4381	3311	2268	102,7	141,3	220	99,54	100,1
7 1/2	24,3	12,70	35,8	1,02	8,72	4,59	4560	3311	2268	101,6	141,3	220	98,42	100,1
	15,73	6,98	22,85	0,86	9,38	4,8	2910	2910	2509	125,7	153,67	224	122,56	101,7
8	17,25	7,72	25,13	0,88	9,44	4,86	3201	3201	2509	124,3	153,67	224	121,08	101,7
	20,17	9,17	29,52	0,94	9,52	4,94	3760	3568	2509	121,4	153,67	224	118,18	101,7
8 1/2	22,86	10,54	33,57	1	9,62	5,04	4277	3568	2509	118,6	153,67	224	115,44	101,7
	16,52	7	24	0,9	9,76	5,29	3058	3058	2760	132,1	166,0	227	128,87	103,2
9	18,03	7,70	26,27	0,94	9,8	5,33	3347	3347	2760	130,7	166,0	227	127,47	103,2
	19,73	8,50	28,83	0,98	9,86	5,39	3673	3673	2760	129,1	166,0	227	125,87	103,2
9 1/2	21,83	9,50	31,99	1,02	9,92	5,45	4075	4075	2760	127,1	166,0	227	123,87	103,2
	24,31	10,70	35,72	1,08	10	5,53	4550	4550	2760	124,7	166,0	227	121,47	103,2

We draw your attention to the fact that technical characteristics are for reference only, and any person who uses this information should check its relevance, by contacting the technical department: techsales@tmk-group.com

Geometrical parameters of pipes with threaded connection TMK UP CWB II

Nominal pipe diameter	Pipe specific weight	Pipe wall thickness	Weight of plain-end pipes	Removed metal weight (both ends)	Coupling weight		Pipe cross-section area	Critical C/S area of coupling	Critical C/S area of special coupling	Inside diameter of coupling	Outside diameter of special coupling	Coupling length	Drift diameter	Length makeup loss
					Regular	Special								
6 5/8	19,96	7,32	29,06	1,08	11,18	6,02	3702	3702	3082	153,6	177,8	233	150,46	106,4
	24	8,94	35,13	1,16	11,32	6,16	4475	4475	3082	150,4	177,8	233	147,22	106,4
7	28,02	10,59	41,18	1,24	11,44	6,28	5246	5246	3082	147,1	177,8	233	143,92	106,4
	31,53	12,06	46,46	1,3	11,54	6,38	5919	5919	3082	144,2	177,8	233	140,98	106,4
7 1/2	23,18	8,05	33,7	0,98	13,88	7,25	4293	4293	3341	161,7	200,03	243	158,52	111
	26,18	9,19	38,21	1	13,98	7,34	4868	4868	3341	159,4	200,03	243	156,24	111
8	29,22	10,36	42,78	1,04	14,08	7,42	5450	5450	3341	157,1	200,03	243	153,9	111
	32,16	11,51	47,2	1,06	14,16	7,52	6013	6013	3341	154,8	200,03	243	151,6	111
8 1/2	34,62	12,65	51,52	1,12	14,26	7,6	6563	6563	3341	152,5	200,03	243	149,32	111
	26,2	8,33	38,08	0,96	15,9	9,6	4851	4851	4740	177	215,9	252	173,84	115,9
9	29,63	9,52	43,24	0,96	16,02	9,72	5508	5508	4740	174,6	215,9	252	171,46	115,9
	33,6	10,92	49,22	0,98	16,14	9,84	6270	6270	4740	171,8	215,9	252	168,66	115,9
9 1/2	38,56	12,70	56,68	0,98	16,28	9,98	7221	7221	4740	168,3	215,9	252	165,1	115,9
	42,85	14,27	63,14	1,1	16,42	12,12	8043	7897	4740	165,1	215,9	252	161,96	115,9
10	35,81	8,94	51,93	-	-	-	6615	6615	6027	226,6	269,88	258	222,63	119,1
	39,83	10,03	57,99	-	-	-	7388	7388	6027	224,4	269,88	258	220,45	119,1
10 1/2	43,57	11,05	63,61	-	-	-	8103	8103	6027	222,4	269,88	258	218,41	119,1
	46,97	11,99	68,75	-	-	-	8757	8757	6027	220,5	269,88	258	216,53	119,1
11	53,6	13,84	78,72	-	-	-	10028	10028	6027	216,8	269,88	258	212,83	119,1

We draw your attention to the fact that technical characteristics are for reference only, and any person who uses this information should check its relevance, by contacting the technical department: techsales@tmk-group.com

Nominal pipe diameter	Pipe specific weight	Pipe wall thickness	Weight of plain-end pipes	Removed metal weight (both ends)	Coupling weight		Pipe cross-section area	Critical C/S area of coupling	Critical C/S area of special coupling	Inside diameter of coupling	Outside diameter of coupling	Outside diameter of special coupling	Coupling length	Drift diameter	Length makeup loss
					Regular	Special									
10 3/4	39,91	8,89	57,91	1,46	25,68	14,01	7378	6770	255,3	298,45	298,45	298,45	258	241,3	119,1
273,05	45,2	10,16	65,87	1,46	25,84	14,17	8391	6770	252,7	298,45	298,45	298,45	258	248,76	119,1
	50,43	11,43	73,75	1,48	26	14,33	9394	6770	250,2	298,45	298,45	298,45	258	246,22	119,1
	45,72	8,50	66,1	1,74	32,07	-	8421	8421	306,9	351	-	-	258	302,88	119,1
12 3/4	50,73	9,50	73,65	1,75	32,14	-	9382	9382	304,9	351	-	-	258	300,88	119,1
323,85	58,18	11,00	84,87	1,75	32,36	-	10811	10811	301,9	351	-	-	258	297,88	119,1
	65,07	12,40	95,24	1,75	32,56	-	12133	12133	299,1	351	-	-	258	295,08	119,1
	53,96	9,65	78,55	9,65	1,82	31,78	10007	10007	320,4	365,12	-	-	258	316,45	119,1
13 3/8	60,6	10,92	88,55	10,92	1,82	31,98	11280	11280	317,9	365,12	-	-	258	313,91	119,1
339,72	67,19	12,19	98,46	12,19	1,84	32,18	12543	12543	315,3	365,12	-	-	258	311,37	119,1

We draw your attention to the fact that technical characteristics are for reference only, and any person who uses this information should check its relevance, by contacting the technical department: techsales@tmk-group.com

Streight characteristics of pipes with TMK UP CWB II threaded connection

Nominal pipe diameter	Pipe specific weight	Pipe wall thickness	Yield Strength in Tension, kN												Minimum Internal Yield Pressure, MPa												Collapse Pressure, MPa											
			Minimum yield strength MPa/ksi												Minimum yield strength MPa/ksi												Minimum yield strength MPa/ksi											
			379	552	621	655	758	862	931	966	1035	1035	552	379	966	1035	379	552	621	655	758	862	931	966	1035													
in	mm	mm	55	80	90	95	110	125	135	140	150	55	80	90	95	110	125	135	140	150	55	80	90	95	110	125	135	140	150									
			11,51	12,39	13,19	15,11	17,37	20,01	21,62	22,43	25,63	39,9	58,1	65	69	79,8	90,8	98,1	101,8	109	116,8	125,6	135,6	144,2	155,7	161,6	173,1	181,8	192,9	202,9	210,9	216,8						
4 1/2	mm	mm	13,2	15,22	16,72	18,25	20,72	23,14	25,51	27,83	30,10	32,32	34,50	36,63	38,71	40,74	42,72	44,65	46,53	48,36	50,14	51,87	53,55	55,18	56,76	58,29	59,77	61,20	62,58	63,91								
			13,2	15,22	16,72	18,25	20,72	23,14	25,51	27,83	30,10	32,32	34,50	36,63	38,71	40,74	42,72	44,65	46,53	48,36	50,14	51,87	53,55	55,18	56,76	58,29	59,77	61,20	62,58	63,91								
5	mm	mm	15,11	17,37	19,63	21,89	24,15	26,41	28,67	30,93	33,19	35,45	37,71	39,97	42,23	44,49	46,75	49,01	51,27	53,53	55,79	58,05	60,31	62,57	64,83	67,09	69,35	71,61	73,87	76,13								
			15,11	17,37	19,63	21,89	24,15	26,41	28,67	30,93	33,19	35,45	37,71	39,97	42,23	44,49	46,75	49,01	51,27	53,53	55,79	58,05	60,31	62,57	64,83	67,09	69,35	71,61	73,87	76,13								
5 1/2	mm	mm	17,25	19,39	21,53	23,67	25,81	27,95	30,09	32,23	34,37	36,51	38,65	40,79	42,93	45,07	47,21	49,35	51,49	53,63	55,77	57,91	60,05	62,19	64,33	66,47	68,61	70,75	72,89	75,03								
			17,25	19,39	21,53	23,67	25,81	27,95	30,09	32,23	34,37	36,51	38,65	40,79	42,93	45,07	47,21	49,35	51,49	53,63	55,77	57,91	60,05	62,19	64,33	66,47	68,61	70,75	72,89	75,03								

We draw your attention to the fact that technical characteristics are for reference only, and any person who uses this information should check its relevance, by contacting the technical department: techsales@tmk-group.com

TMK UP CWB II
Streight characteristics of pipes with TMK UP CWB II threaded connection

Nominal pipe diameter	Pipe specific weight	Pipe wall thickness	Yield Strength in Tension, kN										Minimum Internal Yield Pressure, MPa										Collapse Pressure, MPa																	
			Minimum yield strength, MPa/ksi										Minimum yield strength, MPa/ksi										Minimum yield strength, MPa/ksi																	
			379	552	621	655	758	862	931	966	1035	1035	379	552	621	655	758	862	931	966	1035	1035	379	552	621	655	758	862	931	966	1035	1035								
in	lb/ft	mm	55	80	90	95	110	125	135	140	150	150	150	150	150	150	150	150	150	150	90	95	110	125	135	140	150	150	150	150	90	95	110	125	135	140	150	150	150	150
5 3/4	146.05	19.73	18.03	16.52	15.99	15.99	15.99	15.99	15.99	15.99	15.99	15.99	15.99	15.99	15.99	15.99	15.99	15.99	15.99	15.99	81	86.8	91.5	97.2	102.9	108.6	114.3	120.0	125.7	131.4	32.8	34.8	36.8	38.8	40.8	42.8	44.8	46.8	48.8	50.8
6 5/8	168.28	24.31	19.96	18.03	16.52	15.99	15.99	15.99	15.99	15.99	15.99	15.99	15.99	15.99	15.99	15.99	15.99	15.99	15.99	15.99	81	86.8	91.5	97.2	102.9	108.6	114.3	120.0	125.7	131.4	32.8	34.8	36.8	38.8	40.8	42.8	44.8	46.8	48.8	50.8
7	177.8	29.22	26.18	23.76	21.34	19.91	18.48	17.05	15.62	14.19	12.76	11.33	9.90	8.47	7.04	5.61	4.18	2.75	1.32	0.89	81	86.8	91.5	97.2	102.9	108.6	114.3	120.0	125.7	131.4	32.8	34.8	36.8	38.8	40.8	42.8	44.8	46.8	48.8	50.8
7 5/8	193.68	32.16	29.93	27.51	25.09	22.67	20.25	17.83	15.41	12.99	10.57	8.15	5.73	3.31	0.89	0.89	0.89	0.89	0.89	0.89	81	86.8	91.5	97.2	102.9	108.6	114.3	120.0	125.7	131.4	32.8	34.8	36.8	38.8	40.8	42.8	44.8	46.8	48.8	50.8
		42.85	26.2	23.76	21.34	18.92	16.50	14.08	11.66	9.24	6.82	4.40	1.98	0.89	0.89	0.89	0.89	0.89	0.89	0.89	81	86.8	91.5	97.2	102.9	108.6	114.3	120.0	125.7	131.4	32.8	34.8	36.8	38.8	40.8	42.8	44.8	46.8	48.8	50.8
		42.85	29.93	27.51	25.09	22.67	20.25	17.83	15.41	12.99	10.57	8.15	5.73	3.31	0.89	0.89	0.89	0.89	0.89	0.89	81	86.8	91.5	97.2	102.9	108.6	114.3	120.0	125.7	131.4	32.8	34.8	36.8	38.8	40.8	42.8	44.8	46.8	48.8	50.8
		42.85	29.93	27.51	25.09	22.67	20.25	17.83	15.41	12.99	10.57	8.15	5.73	3.31	0.89	0.89	0.89	0.89	0.89	0.89	81	86.8	91.5	97.2	102.9	108.6	114.3	120.0	125.7	131.4	32.8	34.8	36.8	38.8	40.8	42.8	44.8	46.8	48.8	50.8

Premium connections. TMK UP Series

We draw your attention to the fact that technical characteristics are for reference only, and any person who uses this information should check its relevance, by contacting the technical department: techsales@tmk-group.com

Streight characteristics of pipes with TMK UP CWB II threaded connection

Nominal pipe diameter	Pipe specific weight	Pipe wall thickness	Yield Strength in Tension, kN										Minimum Internal Yield Pressure, MPa										Collapse Pressure, MPa																	
			Minimum yield strength, MPa/ksi										Minimum yield strength, MPa/ksi										Minimum yield strength, MPa/ksi																	
			379	552	621	655	758	862	931	966	1035	1035	379	552	621	655	758	862	931	966	1035	1035	379	552	621	655	758	862	931	966	1035	1035								
in	lb/ft	mm	55	80	90	95	110	125	135	140	150	150	150	150	150	150	150	150	150	150	90	95	110	125	135	140	150	150	150	150	90	95	110	125	135	140	150	150	150	150
9 5/8	244.48	39.83	37.91	35.49	33.07	30.65	28.23	25.81	23.39	20.97	18.55	16.13	13.71	11.29	8.87	6.45	4.03	1.61	0.89	0.89	81	86.8	91.5	97.2	102.9	108.6	114.3	120.0	125.7	131.4	32.8	34.8	36.8	38.8	40.8	42.8	44.8	46.8	48.8	50.8
		46.97	33.91	31.49	29.07	26.65	24.23	21.81	19.39	16.97	14.55	12.13	9.71	7.29	4.87	2.45	0.89	0.89	0.89	0.89	81	86.8	91.5	97.2	102.9	108.6	114.3	120.0	125.7	131.4	32.8	34.8	36.8	38.8	40.8	42.8	44.8	46.8	48.8	50.8
10 3/4	273.05	45.2	43.57	41.15	38.73	36.31	33.89	31.47	29.05	26.63	24.21	21.79	19.37	16.95	14.53	12.11	9.69	7.27	4.85	2.43	81	86.8	91.5	97.2	102.9	108.6	114.3	120.0	125.7	131.4	32.8	34.8	36.8	38.8	40.8	42.8	44.8	46.8	48.8	50.8
		53.6	45.72	43.30	40.88	38.46	36.04	33.62	31.20	28.78	26.36	23.94	21.52	19.10	16.68	14.26	11.84	9.42	7.00	4.58	81	86.8	91.5	97.2	102.9	108.6	114.3	120.0	125.7	131.4	32.8	34.8	36.8	38.8	40.8	42.8	44.8	46.8	48.8	50.8
12 3/4	323.85	58.18	56.07	53.65	51.23	48.81	46.39	43.97	41.55	39.13	36.71	34.29	31.87	29.45	27.03	24.61	22.19	19.77	17.35	14.93	81	86.8	91.5	97.2	102.9	108.6	114.3	120.0	125.7	131.4	32.8	34.8	36.8	38.8	40.8	42.8	44.8	46.8	48.8	50.8
		65.07	53.96	51.54	49.12	46.70	44.28	41.86	39.44	37.02	34.60	32.18	29.76	27.34	24.92	22.50	20.08	17.66	15.24	12.82	81	86.8	91.5	97.2	102.9	108.6	114.3	120.0	125.7	131.4	32.8	34.8	36.8	38.8	40.8	42.8	44.8	46.8	48.8	50.8
13 3/8	339.72	60.6	58.18	55.76	53.34	50.92	48.50	46.08	43.66	41.24	38.82	36.40	33.98	31.56	29.14	26.72	24.30	21.88	19.46	17.04	81	86.8	91.5	97.2	102.9	108.6	114.3	120.0	125.7	131.4	32.8	34.8	36.8	38.8	40.8	42.8	44.8	46.8	48.8	50.8
		67.19	53.96	51.54	49.12	46.70	44.28	41.86	39.44	37.02	34.60	32.18	29.76	27.34	24.92	22.50	20.08	17.66	15.24	12.82	81	86.8	91.5	97.2	102.9	108.6	114.3	120.0	125.7	131.4	32.8	34.8	36.8	38.8	40.8	42.8	44.8	46.8	48.8	50.8


We draw your attention to the fact that technical characteristics are for reference only, and any person who uses this information should check its relevance, by contacting the technical department: techsales@tmk-group.com

LITE SERIES / TMK UP™

Magna



TMK UP
MAGNA

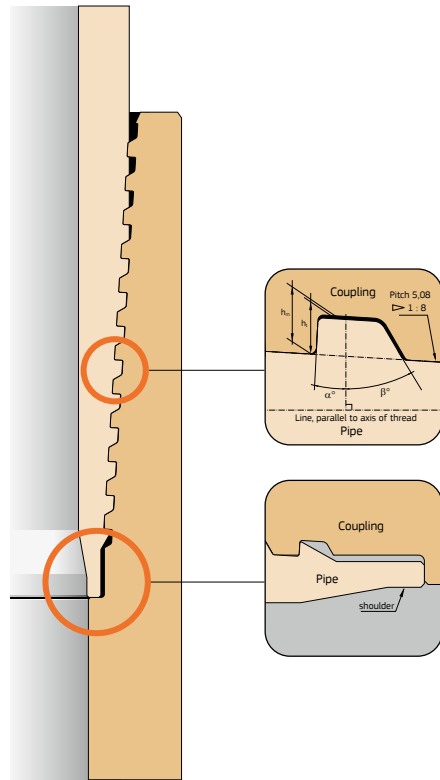

TMK UP MAGNA for Casing

TMK UP MAGNA – quick-assembly connection for large diameter pipes is used for conductor and technical strings in oil and gas wells. The modified taper and increased thread pitch provide an easy fit and quick assembly of the connection, achieving a significant effect in reducing the make-up time of the connection in comparison with Buttress thread. Leak tightness is attained due to thread compound.

Range: 8-5/8"–20" / 219,08 mm–508 mm


Unique Feature:

- 60%** compression efficiency
- 100%** tension efficiency
- Box-to-pin shoulder
- Sealability through thread compound
- Fast make-up
- Deep and easy stabbing
- Over-torque protection during make-up
- Reduces cross threading and prevents thread jump out
- Robust galling resistance
- Prevention from coupling's internal surface erosion

Application:

- Large diameter vertical sections
- Low GOR wells
- Offshore wells
- Deviated wells
- RIH with rotation

TMK UP MAGNA Performance Envelope

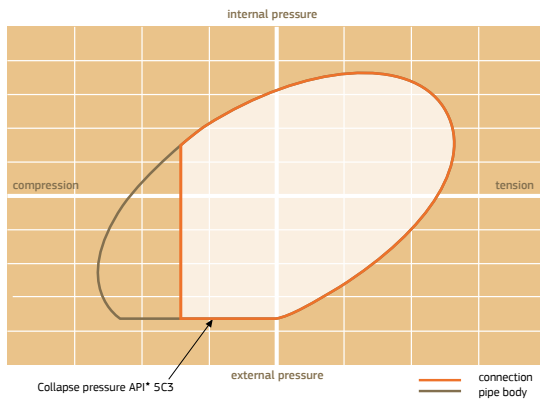

Nominal pipe diameter	Pipe specific weight	Pipe wall thickness	Weight of plain-end pipes	Removed metal weight (both ends)	Coupling weight		Pipe cross-section area	Critical C/S area of coupling	Critical C/S area of special coupling	Inside diameter of coupling	Outside diameter of coupling	Outside diameter of special coupling	Coupling length	Drift diameter	Length makeup loss
					Regular	Special									
in	lb/ft	mm	kg/m	kg	kg	kg	mm ²	mm ²	mm ²	mm	mm	mm	mm	mm	mm
8 5/8	219,08	36,00	52,35	2,55	24,65	14,21	6 668	10976	6225	202,40	244,48	231,78	280,00	194,79	17,80
		40,00	58,53	2,64	24,78	14,34	7 456	10976	6225	201,20	244,48	231,78	280,00	192,25	17,80
		44,00	64,64	2,75	24,89	14,45	8 234	10976	6225	200,20	244,48	231,78	280,00	189,71	17,80
		32,30	46,20	2,82	27,41	15,86	5 886	12184	6926	227,60	269,88	257,18	280,00	224,67	17,80
		40,00	57,99	2,82	27,41	15,86	7 388	12184	6926	227,60	269,88	257,18	280,00	220,45	17,80
9 5/8	244,48	43,50	63,61	2,91	27,49	15,93	8 103	12184	6926	227,00	269,88	257,18	280,00	218,41	17,80
		47,00	68,75	2,98	27,61	16,05	8 757	12184	6926	226,00	269,88	257,18	280,00	216,53	17,80
		53,50	78,72	3,24	27,73	16,18	10 028	12184	6926	225,00	269,88	257,18	280,00	212,83	17,80
		58,40	85,47	3,42	27,86	16,30	10 888	12184	6926	224,00	269,88	257,18	280,00	210,29	17,80
		62,80	92,01	3,36	28,71	-	11 721	12395	-	227,50	276,00	-	280,00	215,10	17,80
9 7/8	250,83	66,40	96,79	3,45	28,83	-	12 345	12395	-	226,50	276,00	-	280,00	213,28	17,80
		72,10	104,89	3,71	28,95	-	13 362	12395	-	225,50	276,00	-	280,00	210,28	17,80
		45,50	65,87	3,2	30,48	17,67	8 391	13560	7733	256,40	298,45	285,75	280,00	248,76	17,80
		51,00	73,75	3,32	30,62	17,81	9 394	13560	7733	255,40	298,45	285,75	280,00	246,22	17,80
		55,50	80,75	3,47	30,73	17,92	10 286	13560	7733	254,60	298,45	285,75	280,00	243,94	17,80
10 3/4	273,05	60,70	88,47	3,65	30,87	18,06	11 270	13560	7733	253,60	298,45	285,75	280,00	241,40	17,80
		65,70	96,12	3,85	31,01	18,20	12 244	13560	7733	252,60	298,45	285,75	280,00	238,86	17,80
		45,91	66,10	3,87	38,08	-	8 421	16955	-	306,20	351,00	-	280,00	302,88	19,00
		58,78	84,87	3,87	38,08	-	10 811	16955	-	306,20	351,00	-	280,00	297,88	19,00
12 3/4	323,85	65,13	95,24	4,07	38,24	-	12 133	16955	-	305,20	351,00	-	280,00	295,08	19,00
		72,87	106,98	4,33	38,43	-	13 628	16955	-	304,00	351,00	-	280,00	291,88	19,00

We draw your attention to the fact that technical characteristics are for reference only, and any person who uses this information should check its relevance, by contacting the technical department: techsales@tmk-group.com

Geometrical parameters of pipes with threaded connection TMK UP MAGNA

Nominal pipe diameter	Pipe specific weight	Pipe wall thickness	Weight of plain-end pipes	Removed metal weight (both ends)	Coupling weight		Pipe cross-section area	Critical C/S area of coupling	Critical C/S area of special coupling	Inside diameter of coupling	Outside diameter of coupling	Outside diameter of special coupling	Coupling length	Drift diameter	Length makeup loss
					Regular	Special									
in	lb/ft	mm	kg/m	kg	kg	kg	mm ²	mm ²	mm ²	mm	mm	mm	mm	mm	mm
13 3/8	339,72	61,00	88,55	4,06	37,71	-	11 280	16761	-	322,00	365,12	-	280,00	313,91	19,00
		68,00	98,46	4,23	37,88	-	12 543	16761	-	321,00	365,12	-	280,00	311,37	19,00
		72,00	105,21	4,38	37,98	-	13 403	16761	-	320,40	365,12	-	280,00	309,63	19,00
14	355,6	82,50	120,12	6,42	47,7	-	15 302	19345	-	332,00	381,00	-	300,00	322,30	19,80
		94,80	139,26	7,87	48,1	-	17 740	19345	-	330,40	381,00	-	300,00	317,52	19,80
		75,00	111,3	5,57	59,88	-	13 821	21168	-	386,30	431,80	-	300,00	379,38	108,60
16	406,4	84,00	122,09	6,93	52,78	-	15 552	22045	-	383,80	431,80	-	300,00	376,50	119,80
		109,00	160,13	7,69	53,52	-	20 399	22045	-	381,20	431,80	-	300,00	368,32	119,80
		72,94	102,59	5,68	54,77	-	13 069	21890	-	405,90	451,00	-	300,00	401,24	108,60
		79,63	110,58	5,81	54,77	-	14 341	21890	-	405,90	451,00	-	300,00	399,24	108,60
16 7/8	425,45	86,29	122,52	5,9	55,23	-	15 607	21890	-	404,80	451,00	-	300,00	397,24	108,60
			132,41	6,24	56,16	-	16845	21890	-	403,0	451	-	300,0	394,69	119,8
		87,50	125,91	6,49	78,83	-	16 039	32091	-	453,00	508,00	-	300,00	446,22	108,60
18 5/8	473,08	96,50	140,63	6,66	79,27	-	17 833	32091	-	452,00	508,00	-	300,00	443,68	108,60
		94,00	113	6,97	65,66	-	17 374	26343	-	497,70	533,40	-	300,00	480,98	110,20
20	508	106,50	155,13	8,72	65,5	-	19 762	27418	-	485,00	533,40	-	300,00	477,84	121,40
		133,00	161,3	9,48	66,25	-	24 925	27418	-	482,80	533,40	-	300,00	470,98	121,40

We draw your attention to the fact that technical characteristics are for reference only, and any person who uses this information should check its relevance, by contacting the technical department: techsales@tmk-group.com

Strength characteristics of pipes with TMK UP MAGNA threaded connection

TMK UP MAGNA

Nominal pipe diameter	Pipe wall thickness	Pipe specific weight	Yield Strength in Tension, kN										Minimum Internal Yield Pressure, MPa										Collapse Pressure, MPa									
			Minimum yield strength MPa/ksi										Minimum yield strength MPa/ksi										Minimum yield strength MPa/ksi									
			379	552	621	655	758	862	931	966	1035	379	552	621	655	758	862	931	966	1035	379	552	621	655	758	862	931	966	1035			
in	mm	lb/ft	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm					
8 5/8	219,08	36,00	10,16	2527	3681	4141	4368	5055	5748	6208	6435	6902	30,8	44,8	50,4	53,2	61,5	70,0	75,6	78,3	84,0	23,8	28,3	29,3	30,0	32,3	34,0	34,7	35,0	35,3		
9 5/8	244,48	40,00	11,43	2826	416	4630	4884	5652	6427	6942	7195	7717	34,6	50,4	56,7	59,8	69,2	78,7	85,0	88,1	94,5	30,4	38,1	40,5	41,5	44,1	45,7	46,2	47,0	48,4		
10 3/4	273,05	40,00	10,03	2800	4078	4588	4839	5600	6368	6878	7129	7646	27,2	39,6	44,6	47,0	54,4	61,9	66,8	69,3	74,3	17,7	21,3	22,4	22,9	23,0	24,2	24,4	24,4	24,5		
12 3/4	323,85	40,00	11,05	3071	4473	5032	5308	6142	6985	7544	7820	8387	30,0	43,7	49,1	51,8	60,0	68,2	73,6	76,3	81,9	22,4	26,3	27,7	28,5	30,5	31,9	32,5	32,6	32,7		
14	355,6	40,00	12,40	4598	6697	7534	7947	9197	10458	11296	11747	12557	25,4	37,0	41,6	43,9	50,8	57,8	62,4	64,7	69,4	18,2	19,0	19,3	19,6	19,7	19,8	19,9	20,0	20,0		
16	406,4	40,00	12,40	5165	7523	8463	8926	10330	11747	12688	13151	14105	28,7	41,8	47,0	49,6	57,3	65,2	70,4	73,0	78,3	20,2	23,7	25,2	25,8	27,4	28,3	28,5	28,6	28,7		

Premium connections. TMK UP Series

We draw your attention to the fact that technical characteristics are for reference only, and any person who uses this information should check its relevance, by contacting the technical department: techsales@tmk-group.com

Strength characteristics of pipes with TMK UP MAGNA threaded connection

Nominal pipe diameter	Pipe wall thickness	Pipe specific weight	Yield Strength in Tension, kN										Minimum Internal Yield Pressure, MPa										Collapse Pressure, MPa									
			Minimum yield strength MPa/ksi										Minimum yield strength MPa/ksi										Minimum yield strength MPa/ksi									
			379	552	621	655	758	862	931	966	1035	379	552	621	655	758	862	931	966	1035	379	552	621	655	758	862	931	966	1035			
in	mm	lb/ft	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm					
13 3/8	339,72	61,00	10,92	4275	6226	7005	7388	8550	9723	10502	10885	11675	21,3	31,1	34,9	36,8	42,6	48,5	52,4	54,3	10,6	10,7	10,8	10,8	10,9	11,0	11,1	11,3				
14	355,6	68,00	12,19	4754	6924	7789	8216	9508	10812	11678	12104	12982	23,8	34,7	39,0	41,1	47,6	54,1	58,5	60,6	65,0	13,4	15,6	16,0	16,1	16,2	16,3	16,4	16,5	16,6		
16	406,4	72,00	13,06	5080	8447	9503	10023	11599	13190	14246	14766	15838	26,6	38,8	43,6	46,0	53,2	60,5	65,4	67,8	72,7	16,7	20,3	21,3	21,7	22,5	22,7	22,8	22,9	23,0		
18 5/8	473,08	94,80	16,66	6723	9792	11016	11620	13447	15292	16516	17119	18361	31,1	45,3	50,9	53,7	62,1	70,7	76,3	79,1	84,9	24,3	29,1	30,2	30,6	33,0	34,9	35,7	36,1	36,5		
20	508	109,00	16,66	7731	11260	12688	13361	15334	17584	18991	19685	21113	27,2	39,6	44,6	47,0	46,6	61,8	66,8	69,2	74,3	17,7	21,2	22,4	22,9	15,0	24,2	24,3	24,4	24,5		
20	508	106,50	12,70	7490	10908	12272	12944	14979	17034	18398	19070	20453	16,6	24,2	27,2	28,1	29,6	34,3	39,0	42,1	43,6	46,8	5,9	6,0	6,1	6,1	6,2	6,3	6,4	6,5		
16 7/9	425,45	86,29	12,00	5915	8615	9692	10223	11830	13454	14531	15061	16154	18,7	27,2	30,6	32,3	37,4	42,5	45,9	47,6	51,0	7,6	7,7	7,8	7,9	8,0	8,1	8,2	8,2			
18 5/8	473,08	87,50	11,05	6079	8854	9960	10506	12158	13826	14932	15478	16601	15,5	22,6	25,4	26,8	31,0	35,2	38,1	39,4	42,3	4,4	4,5	4,6	4,6	4,7	4,8	4,9	4,9	5,0		
20	508	94,00	11,13	6585	9590	10789	11380	13169	14976	16175	16765	17982	14,5	21,2	23,8	25,1	29,1	33,1	35,7	37,0	39,7	3,8	3,9	4,0	4,0	4,1	4,2	4,3	4,3	4,4		
18 5/8	473,08	133,00	16,13	9447	13759	15478	16326	18893	21485	23205	24053	25797	21,1	30,7	34,5	36,4	42,1	47,9	51,7	53,6	57,5	10,3	10,4	10,5	10,5	10,6	10,7	10,8	10,8	10,9		


We draw your attention to the fact that technical characteristics are for reference only, and any person who uses this information should check its relevance, by contacting the technical department: techsales@tmk-group.com

SERIES


Connectors

CONNECTORS Series includes premium welded quick-assembly and threaded connectors. They could be used at offshore and onshore projects.

TMK UP™ MOLOT

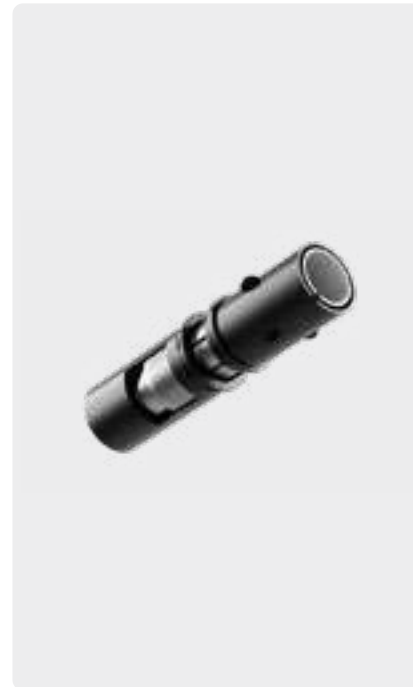

TMK UP™ KATRAN HD

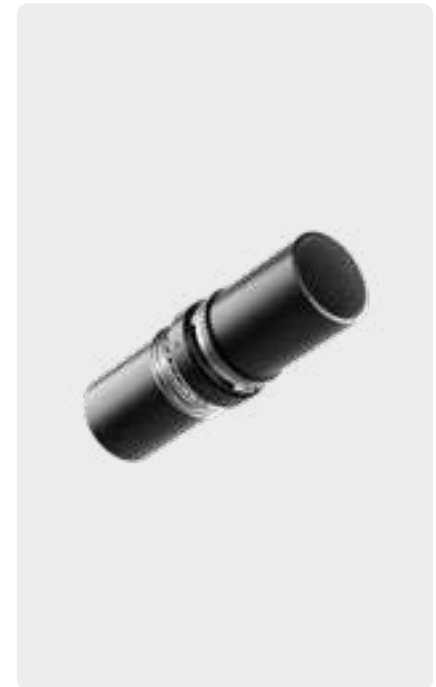


CONNECTORS SERIES / TMK UP™

Molot



TMK UP MOLOT

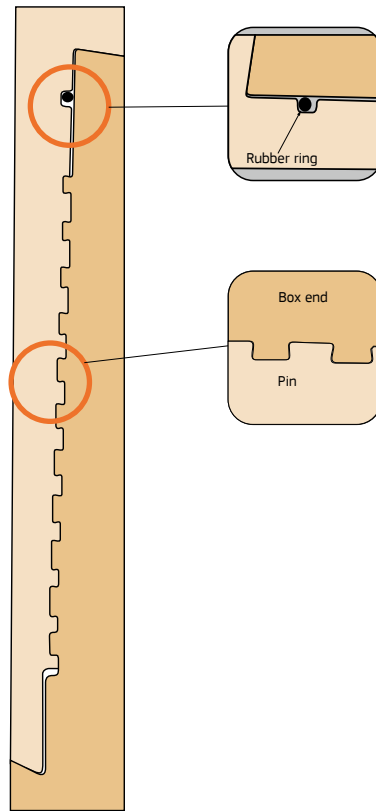

Threaded connector TMK UP MOLOT

Threaded connector used for water separating conductor risers. Supplied with lifting pup joint and crossover of own production. The system is able to withstand shock loads from hydraulic hammer used to RIH of such conductors.

Range:

30"/ 762,00 mm


Unique Feature:

- Dynamic shock tested
- Increased bending capacity
- Reliability and ease of make-up due to large thread pitch
- Breakout resistance without installing special tools
- Tightness due to thrust and rubber seal
- Outer and inner diameters are equal to the pipe body diameter
- The double shoulder construction enhances connector strength during impact loads

Application:

- Large diameter vertical sections
- Sections with low GOR
- Offshore wells
- RIH from offshore platforms

TMK UP MOLOT Performance Envelope

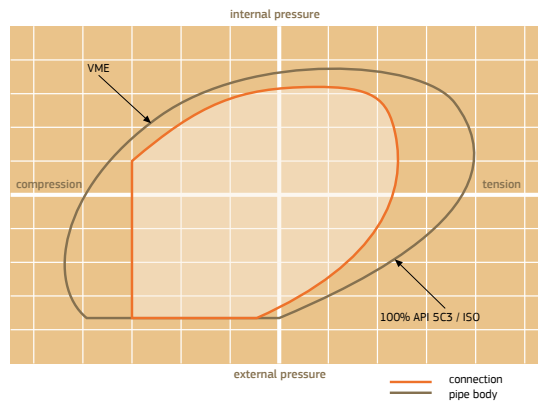

Nominal pipe diameter		Pipe specific weight	Pipe wall thickness	Weight of plain-end pipes	Pipe crosssection area	Box ID	Box OD	Drift diameter	Length makeup loss
in	mm	lb/ft.	mm	kg/m	mm ²	mm	mm	mm	mm
1	2	3	4	5	6	7	8	9	10
30	762	309,70	25,4	461,33	58778	711,2	762,00	707,23	204,00

Strength characteristics of pipes with TMK UP MOLOT threaded connection

Nominal pipe diameter		Pipe specific weight	Pipe wall thickness	Yield Strength in Tension, kN		Minimum Internal Yield Pressure, MPa		Collapse Pressure, MPa	
in	mm	lb/ft.	mm	Minimum yield strength MPa/ksi		Minimum yield strength MPa/ksi		Minimum yield strength MPa/ksi	
30	762	309,70	25,4	390	415	390	415	390	415
				56	60	56	60	56	60
				10328	10971	24,5	26,0	10,6	10,9
					11903		28,2		11,3

We draw your attention to the fact that technical characteristics are for reference only, and any person who uses this information should check its relevance, by contacting the technical department: techsales@tmk-group.com



Katran HD

Quick-assembly connection TMK UP KATRAN HD

A quick-assembly connector designed for running conductor pipes into a drilled well with complicated conditions where exceptional resistance to high compressive and torsional loads is required.

Range:

30 x 1" / 762,00 x 25,4 mm

20 x 0,625" / 508,00 x 15,9 mm

Unique Feature:

- Under the pipe's own weight make-up without the use of special equipment
- Breakout through pressure bolts
- Liquid tightness due to O-rings
- Teeth on the pipe and grooves on the coupling ensure high torque resistance
- Double the number of engagement elements increase load-bearing capacity
- 100% development and production in Russia

Application:

- Large diameter vertical sections
- Sections with low GOR
- Offshore wells

Nominal pipe diameter		Pipe wall thickness mm	Weight of pipes without connector kg/m	Inner diameter of the connector mm	Outer diameter of the connector mm	Connector weight kg	Make-up loss mm
in	mm						
20	508	15,9	193,0	457,2	556,0	152,0	132,5
30	762	25,4	461,4	685,8	847,0	411,3	152,6

Strength parameters of pipes with quick-assembly connector TMK UP KATRAN HD

Nominal pipe diameter	Pipe wall thickness		Axial load up to the yield point of the pipe body kN	Connector steel grade	Elongation to the connector yield point kN	Compression to connector yield point kN	Strength against internal pressure MPa	Maximum bend °/30m	Maximum torque kN*m
	mm	mm							
20	15,9	25,4	9590	X80	10400	13640	18,0	13,0	481
30	25,4	25,4	22920	X80	11990	16380	18,0	6,0	1827

We draw your attention to the fact that technical characteristics are for reference only, and any person who uses this information should check its relevance, by contacting the technical department: techsales@tmk-group.com

REFERENCE DATA

Color coding of steel grades

Steel grade	Color identification				
	Coupling		Pipe	Image	
	Paint of external surface	Ring stripes (special coupling plus one black stripe)	Ring stripes	Coupling	Pipe
J55 Tubing	Light green	-	One light green		
J55 Casing	Light green	One white	One light green		
K55 Tubing	Light green	One white	Two light green		
K55 Casing	Light green	-	Two light green		
N80 1 type	Red	-	One red		
N80 Q type	Red	One green	One red, one light green		
L80 1 type	Red	One brown	One red, one brown		
L80 9 Cr	-	Two yellow	One red, one brown, two yellow		
L80 13 Cr	-	One yellow	One red, one brown, one yellow		
C90	Purple	-	One purple		
T95	Silver	-	One silver		
R95	Brown	-	One brown		
C110	White	Two brown	One white, two brown		
P110	White	-	One white		
Q125	Orange	-	One orange		
Q135	Orange	One white	Two orange		
TMK140	Yellow	One brown	One yellow, one brown		
TMK150	Blue	One red	One blue, one red		

Units of American system USC and international system SI

Value	Units				Ratio
	USC		SI		
	Name	Notation	Name	Notation	
Mass	pounds	pound (lb)	kilogram	kg	1 pound = 0.454 kg 1 kg = 2.205 pound
Mass, length units	pound per feet	pound/foot (lb/ft)	kilograms per one meter	kg/m	1 lb/ft = 1.488 kg/m 1 kg/m = 0.672 lb/ft
Diameter, wall thickness	inch	inch (in)	millimeter	mm	1 in = 25.4 mm 1 mm = 0.039 in 1 m = 1000 mm 1 ft = 12 in 1 ft = 0.305 m 1 m = 3.279 ft
Length	feet	Foot (ft)	meter	m	
Area	square inch	sq. inch (sq. in.)	square millimeters	mm ²	1 sq. in. = 645.16 mm ² 1 mm ² = 0.00155 sq. in.
Volume	cubic inch	cub. inch. (cub. in.)	cubic centimeters	cm ³	1 cub. in. = 16.387064 cm ³ 1 ft = 1728 cub. in. = 0.028317 dm ³ 1 cm ³ = 0.061024 cub. in. 1 m ³ = 35.31467 cub. ft.
Force	pound-force	pound-force (lb(f))	Newton	N	1 lb(f) = 4,448 N 1 N = 0.225 lb(f)
Pressure, strain	pound on square inch	pound per square inch (psi)	Pascal	Pa	1 Pa = 1 N/m ² 1 mPa = 106 Pa = 1N/mm ² 1 ksi = 103 psi 1 psi = 0.0069 mPa 1 mPa = 145.03 psi
Force moment	foot-pound force	pound force-foot (ft-lb)	Newton-meter	Nm	1 ft-lb = 1.356 Nm 1 Nm = 0.738 ft-lb 1 kgm = 0.102 Nm

Premium connections, TMK UP Series

** Results obtained by mathematical modeling and data analysis

★ Effective March 17, 2022, the API Monogram/APIQR Program has ceased offering certification services within the Russian Federation in response to restrictions on financial and business activities imposed by the U.S. and Russian governments. As a result, now all TMK facilities are not authorized to apply the API Monogram on their products.


TMK facilities were holding API license continuously for over 25 years. They have vast experience of manufacturing material in accordance with API standards to the clients worldwide. Since 2003, the TMK facilities have produced more than 3 million metric tons of casing, tubing, drilling and linepipes as per API Standards and marked with the API monogram.

TMK product's quality and reliability are demonstrated by years of supply and service customers.

However, now the TMK facilities are still permitted to state that their products meet or comply with an API standard or specification provided that they do meet the requirements in the API standard or specification. As previously, the TMK facilities guarantee full compliance with the requirements of the API Standards and the quality of supplied products.

To provide additional confidence to our clients, in the summer of 2022 the TMK facilities have been audited by AJA Registrars CIS ltd. and found to be in accordance with requirements API Spec. 5CT, API Spec. 5L, API Spec. 5DP & API Spec. Q1.

During a manufacturing of customer orders a third part inspection can be involved to re-assure that all material is



TMK

101000, Moscow, Pokrovka St 40, Bldg. 2A

Tel.: +7 (495) 775-76-00

Fax: +7 (495) 775-76-01

tmk@tmk-group.com

www.tmk-group.com